泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Low Noise Amplifier

50KHz-40GHz /5.5dB NF/38dB Gain/14 dBm P1dB

Model: TLLA50K40G-38-50

TLLA50K40G-38-50 is a low noise amplifier with a typical small signal gain of 38 dB and a nominal noise figure of 5.5 dB across the frequency range of 50 KHz to 40 GHz. The DC power requirement for the amplifier is +6 V DC/180 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band:50KHz-40GHz
- Gain: 38dB Typ
- Noise Figure: 5.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range		50KHz-40GHz		
Gain	36	38		dB
Gain Flatness		±2.5		dB
Output P1dB		14		dBm
Noise Figure		5.5		dB
Input VSWR		1.8		:1
Output VSWR		1.8		:1
DC Voltage		6	12	V DC
DC Supply Current		180		mA
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	2.92mm Female/2.92mm Female	
DC Bias	Solder Pin	
Size	35*40*12	mm
Weight	/	g

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

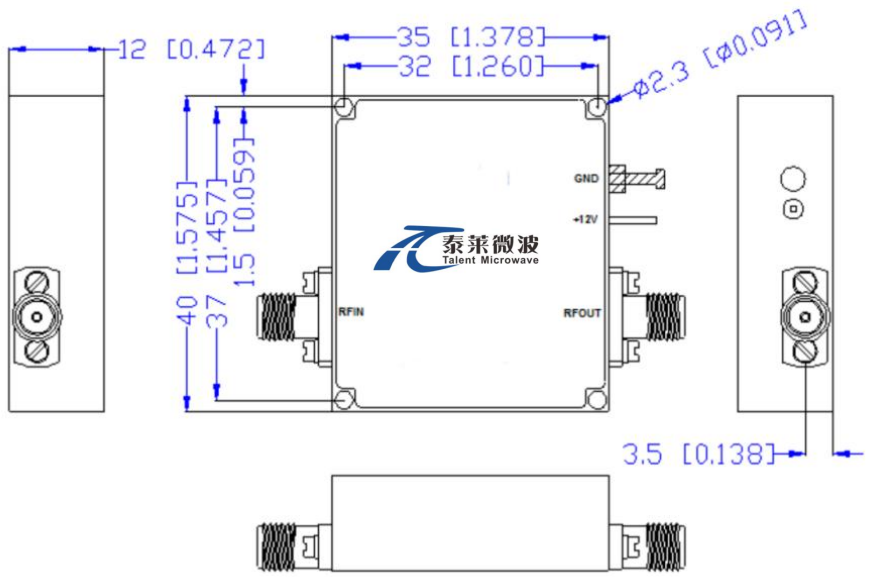

***Heat Sink Required During Operation

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	℃
Non-operating Temperature	-55		+125	℃
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Ordering Information:

Base Number	Desciption	Revision
TLLA50K40G-38-50	Low Noise Amplifier, 50KHz-40GHz, Noise Figure:5.5dB, Gain:38 dB,P1dB:14dBm,+6V DC,Without Heatsink	Rev.1.1
TLLA50K40G-38-50-HS	Low Noise Amplifier, 50KHz-40GHz, Noise Figure:5.5dB, Gain:38 dB,P1dB:14dBm,+6V DC,With Heatsink	Rev.1.1

Typical Performance Data:

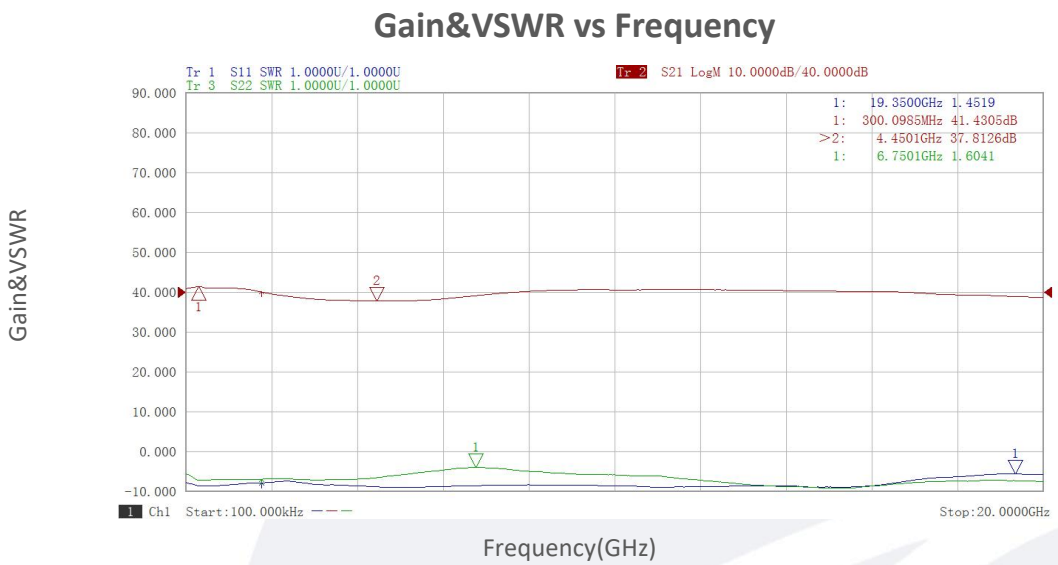

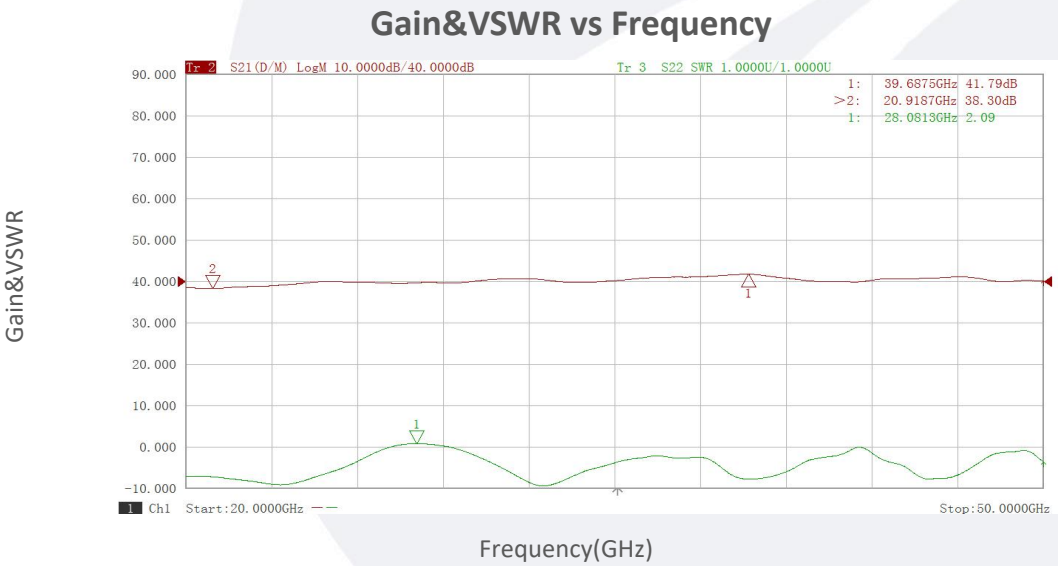

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

Input VSWR vs Frequency

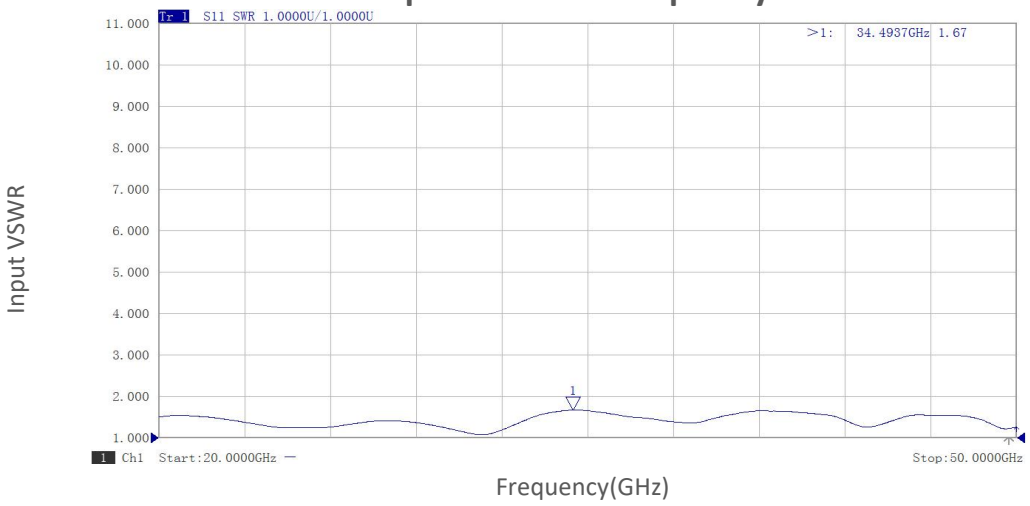

Noise Figure vs Frequency

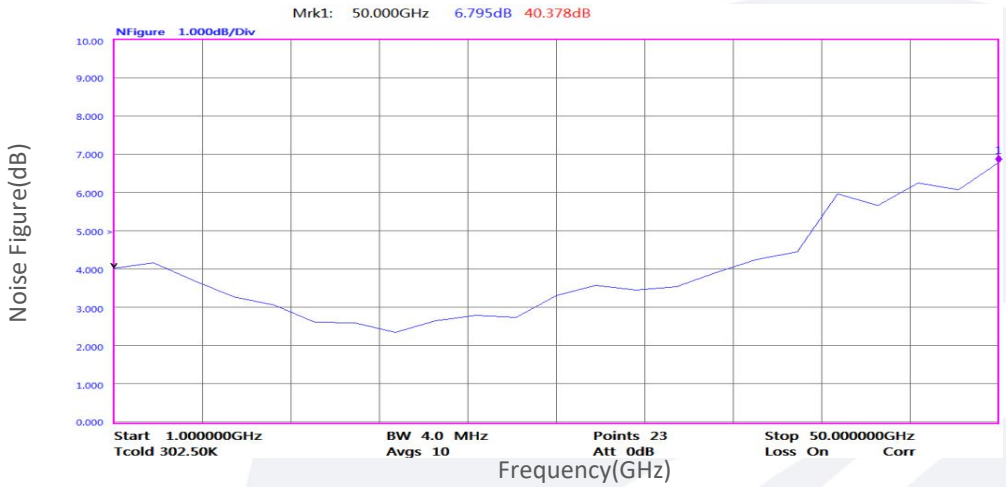

Gain vs Output Power

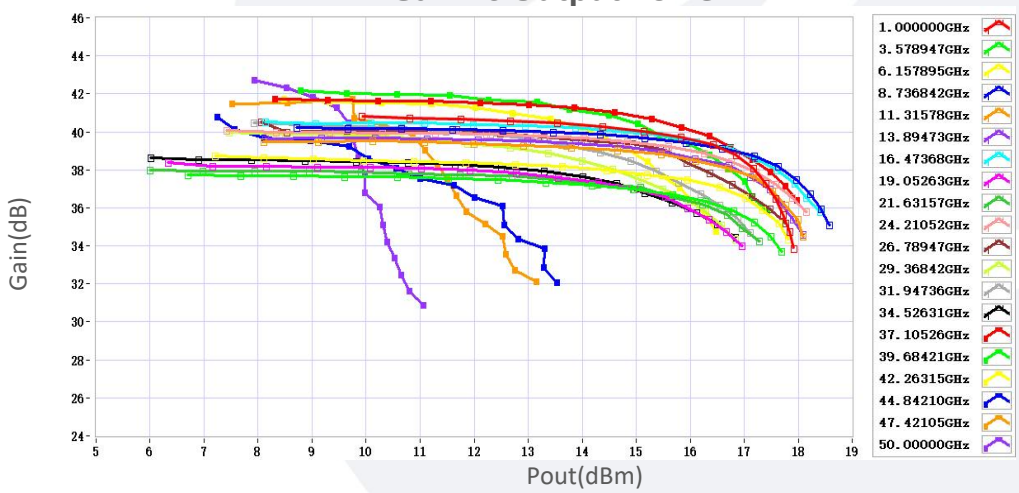

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

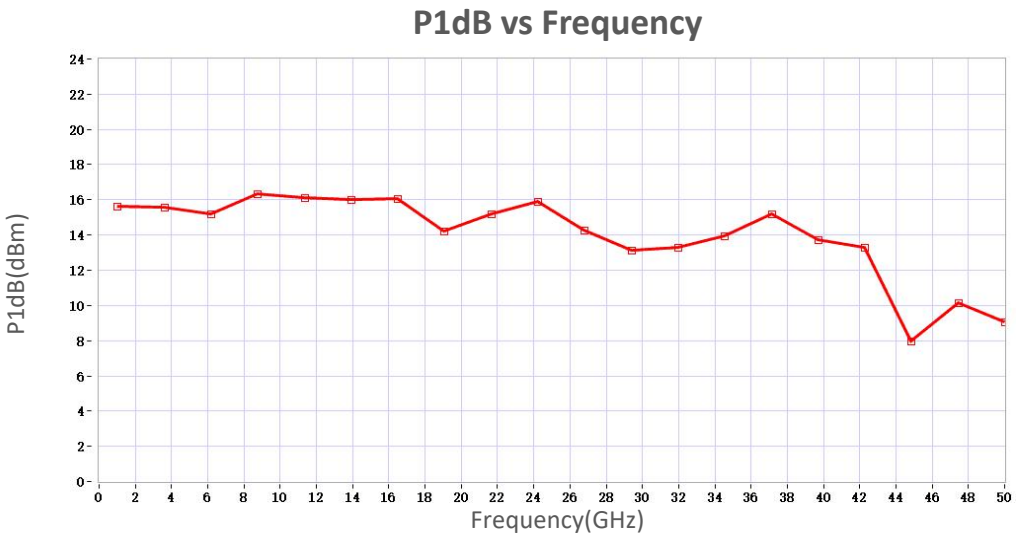

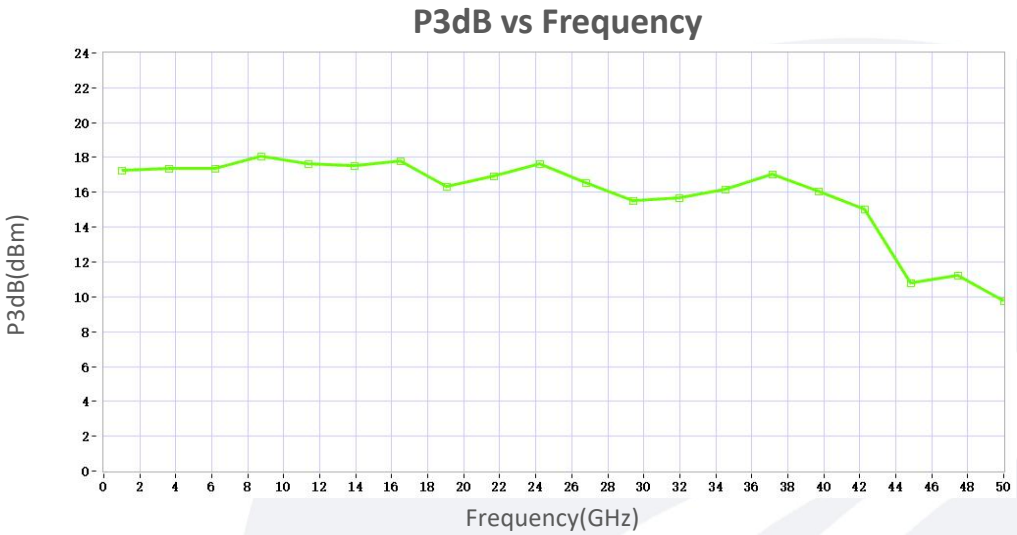

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.