

Waveguide to Coax Adapter, Right Angle WR-19/1.85mm Female/40-60GHz

Model: TL-19WCA1.85R

The TL-19WCA1.85R is right angle waveguide to coax adapters that cover the frequency range of 40 to 60 GHz. It is designed for an efficient transition between the rectangular waveguide and 1.85 mm coax connector.

Features:

- Operating Frequency 40 to 60GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies



电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	40		60	GHz
插损 Insertion Loss		0.4	0.8	dB
驻波 VSWR			1.6	:1
耐功率 Power Handling			10	W

机械特性 Physical Characteristics:

参数 Parameter	类型 Description	单位 Units
材质 Material	Copper	
表面处理 Finish	Gold Plated, Blue paint	
同轴接口 Coax Connector	1.85mm Female	
波导 Waveguide	WR19/UG-383/U-M	

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

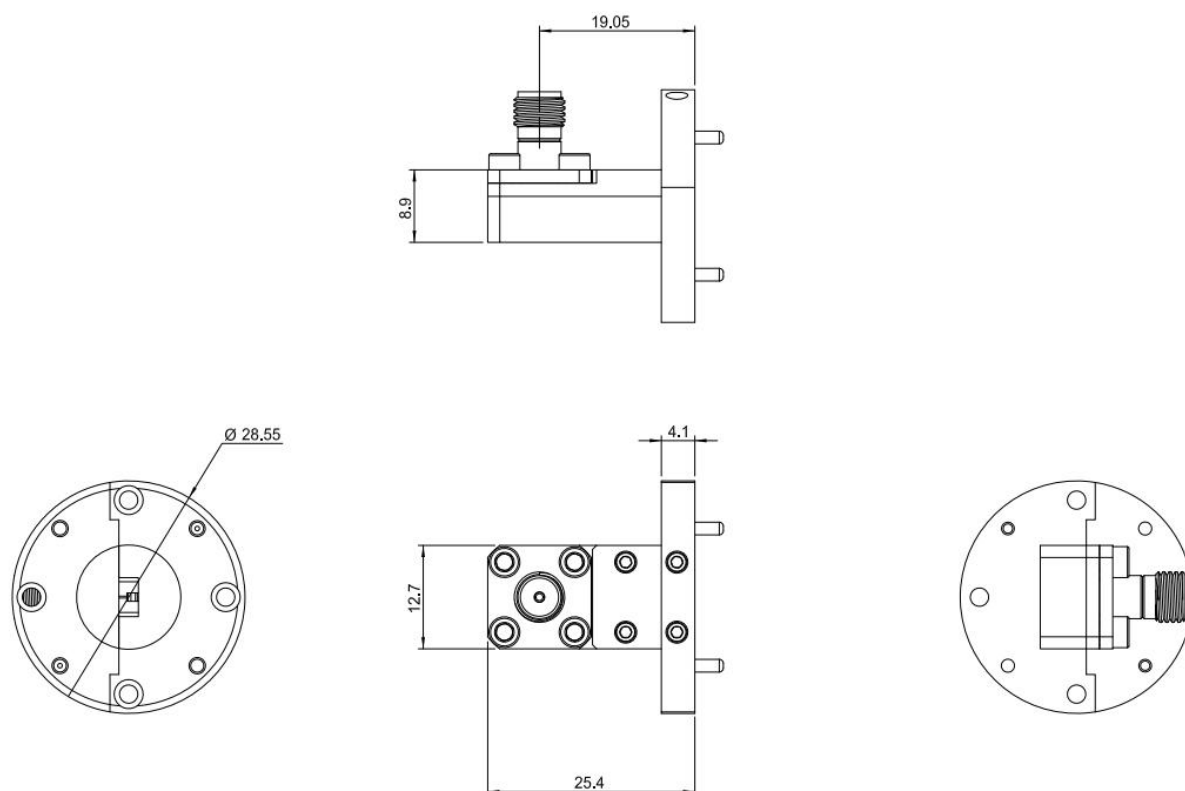


订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TL-19WCA1.85R	Waveguide to Coax Adapter, Right Angle WR19/1.85mm Female,40-60GHz	Rev.1.1

典型曲线 Typical Performance Data(Tested back-to-back):

VSWR vs Frequency

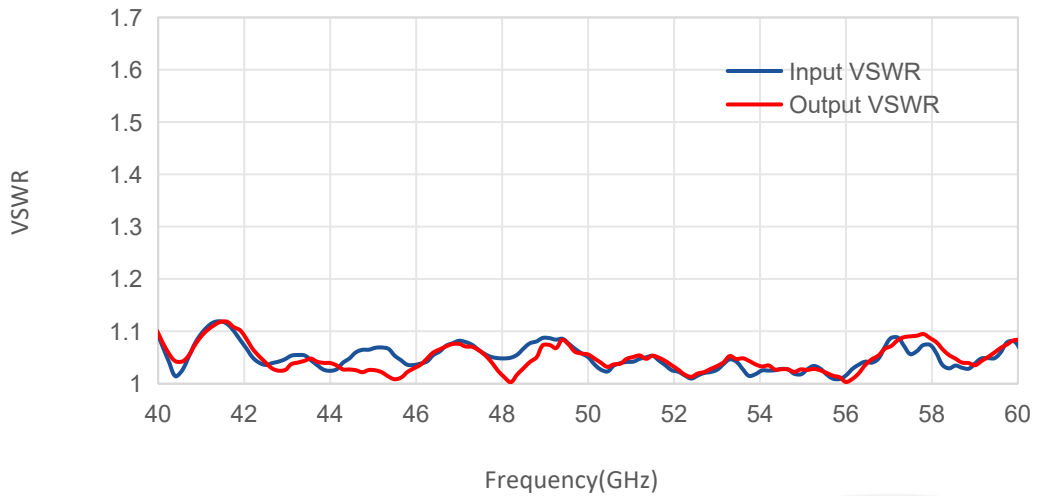

Insertion Loss vs Frequency

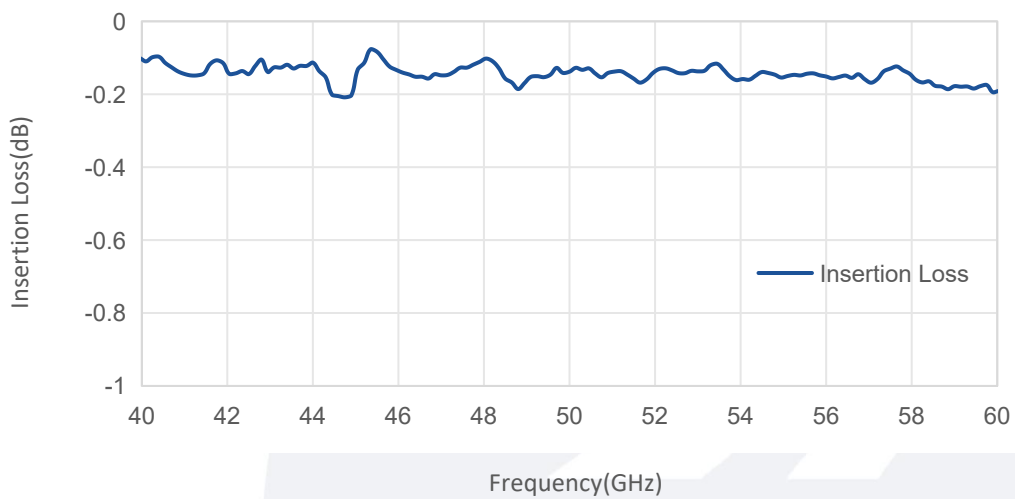

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.