


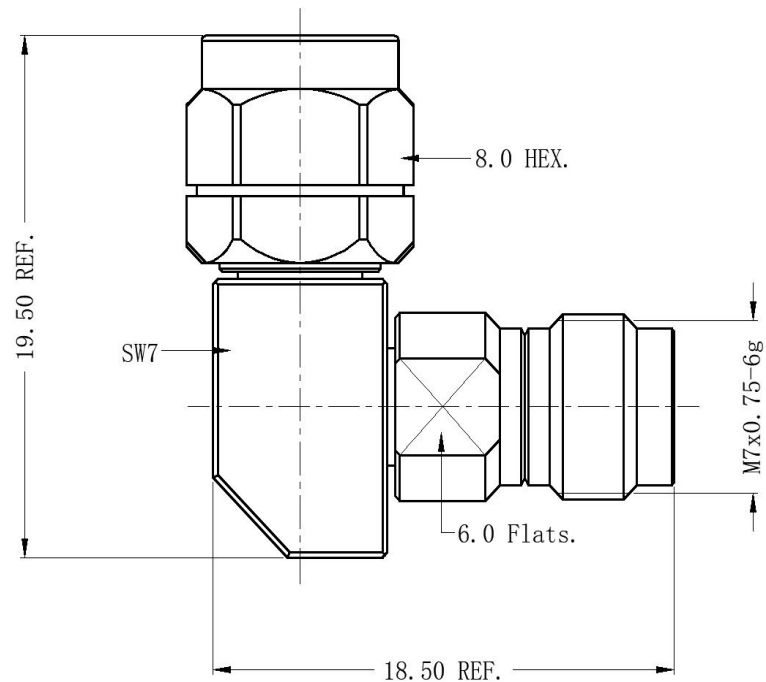

Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~50GHz
Dielectric Withstanding Voltage	1000V
VSWR	≤1.35
Insertion Loss	≤0.65dB
Operating Temperature	- 55~+125℃

Material & Coat-Plating

Inner Conductor	BE-CU, Gold Plated
Dielectric	PEI
Body	Stainless steel, Passivation
Nut	Stainless steel, Passivation

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

Suzhou Talent Microwave,Inc

Unit
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLC ±0.25
1 PLC ±0.15
2 PLC ±0.12
3 PLC ±
3 PLC ±
ANGLES ±1°

APVD

PRODUCT SPEC

APPLICATION SPEC

Product Model

2.4-JWKS
2.4mm Male-RA to 2.4mm Female Adaptor

MATERIAL
SEE TABLE

FINISH
SEE TABLE

WEIGHT


SIZE
A4

GAGE CODE
0T8L4

DRAWING NO

CUSTOMER DRAWING

SHEET1 OF 1 RVE 1

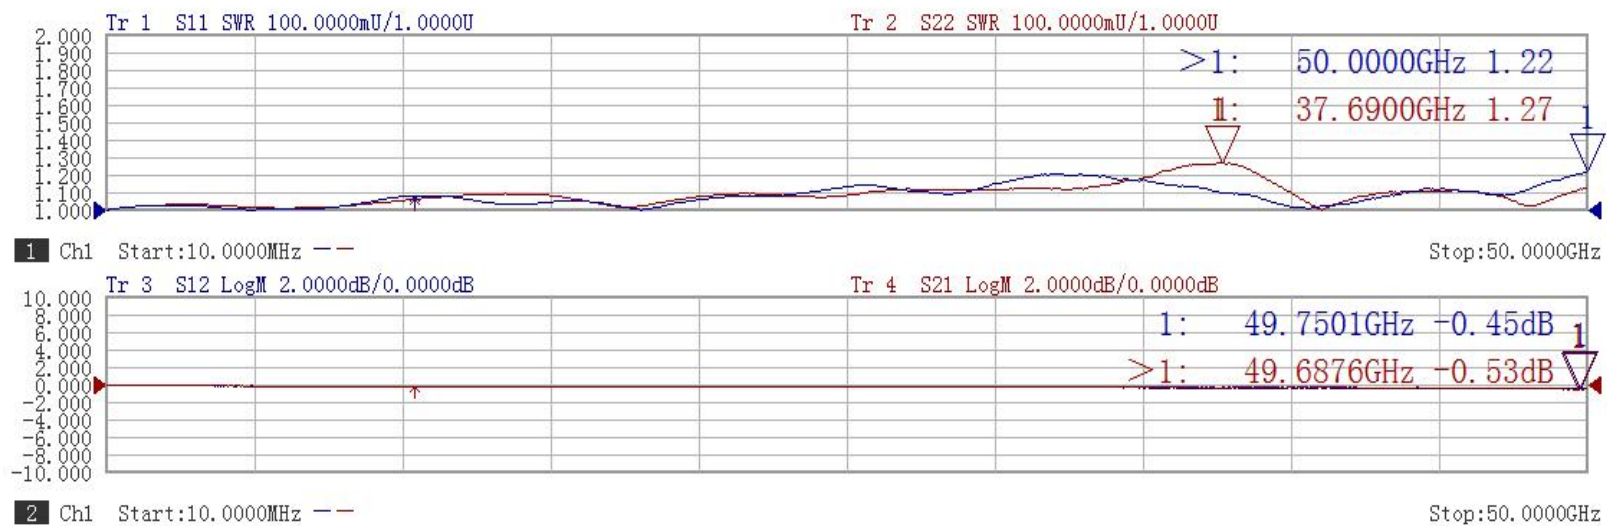

	SweepType	Start (GHz)	Stop (GHz)	Points	IF BW (Hz)	SweepTime (s)	Port1, 2Power (dBm)
Ch1	LIN_SWEEP	0.010000000	50.000000000	801	1000	1.000000	-5.00, -5.00