

Power Amplifier

26.5-40GHz /40dB Gain/40 dBm Psat

Model: TLPA26.5G40G-37-37

TLPA26.5G40G-37-37 is a power amplifier with a minimum small signal gain of 40 dB and a typical Psat of 40 dBm across the frequency range of 26.5 to 40 GHz. The DC power requirement for the amplifier is +220 VAC. The input port configuration offers coax adapter structure with 2.92mm female and output port configuration offers coax adapter structure with 2.92mm female or WR28.

Features:

- Frequency range: 26.5-40GHz
- Gain: 40dB Min
- Output Power Psat: 40dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	26.5-40			GHz
Small Signal Gain	40			dB
Psat Flatness		±1		dB
Output P1dB		37		dBm
Output Psat		40		dBm
Spurious			-50	dBc
Harmonic			-25	dBc
Input VSWR			2	:1
AC Voltage		220		V AC
Power Consumption			150	W
Impedance	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	2.92mm Female/29.2mm Female or WR28	
AC Supply Connector	Standard AC Socket	
Size	320*200*98	mm
Weight	≤5	Kg


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	260 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

Regulatory Compliance:

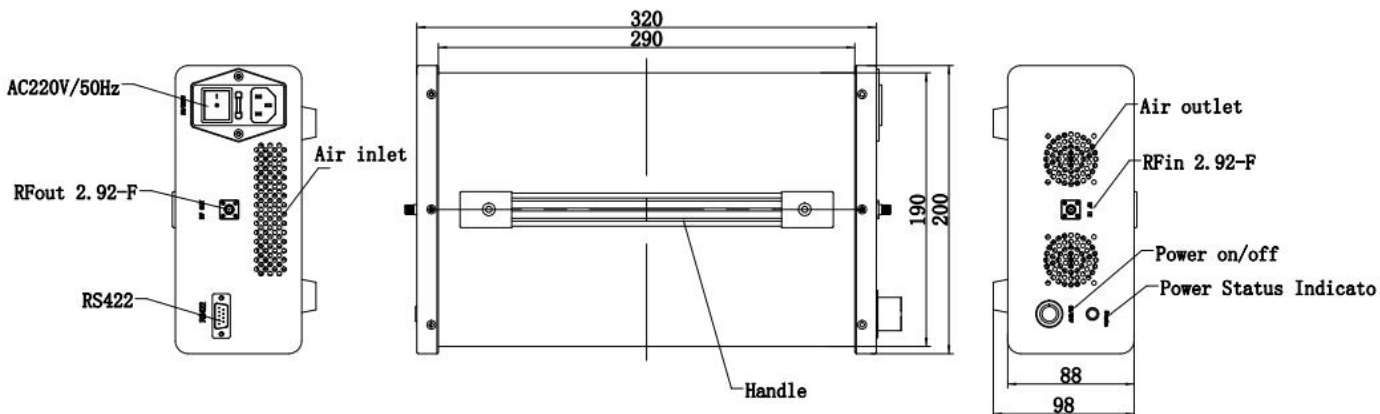

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+50	°C
Non-operating Temperature*	-30		+60	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA26.5G40G-37-37	Power amplifier 26.5-40GHz, Gain:40dB,Psat:40dBm,220V AC	Rev.1.1


Typical Performance Data:

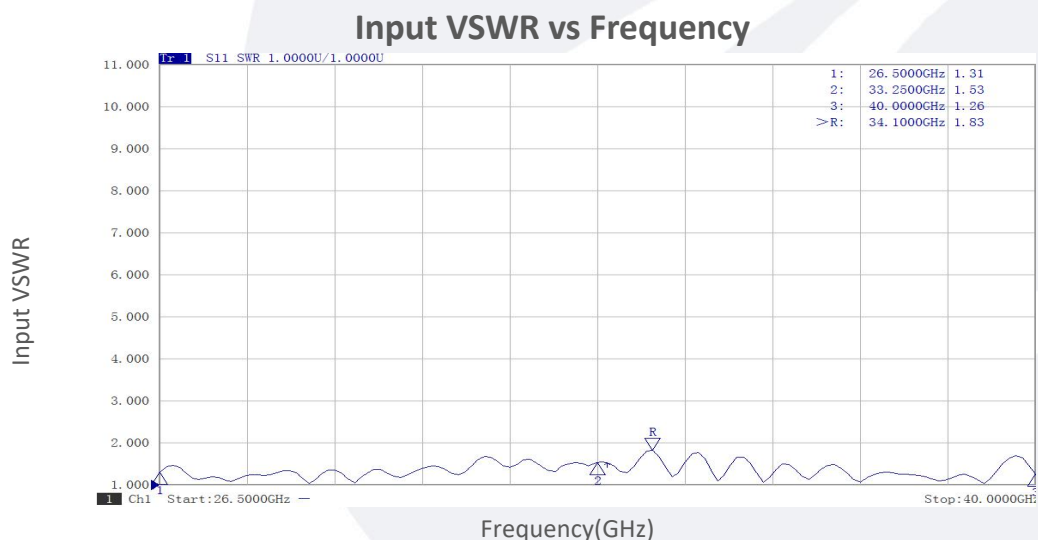


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Small Signal Gain vs Frequency

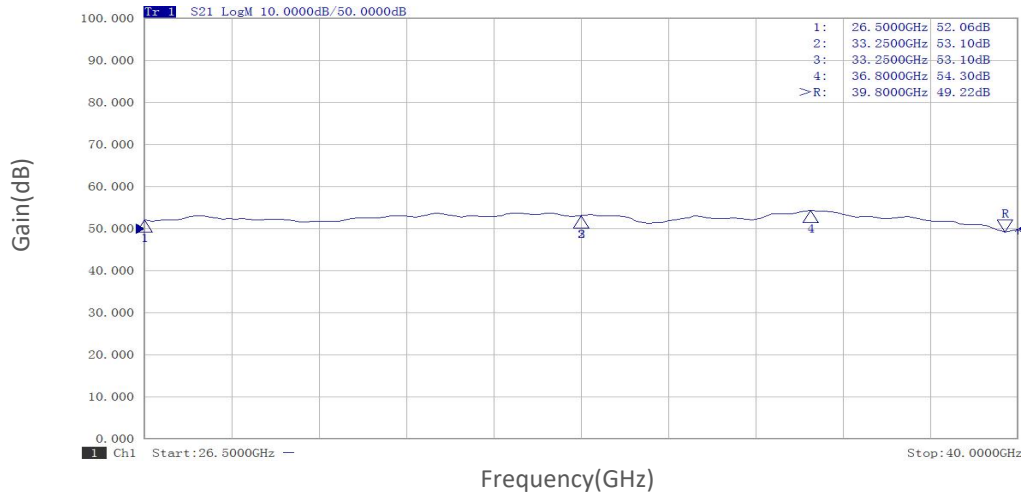

PndB vs Frequency


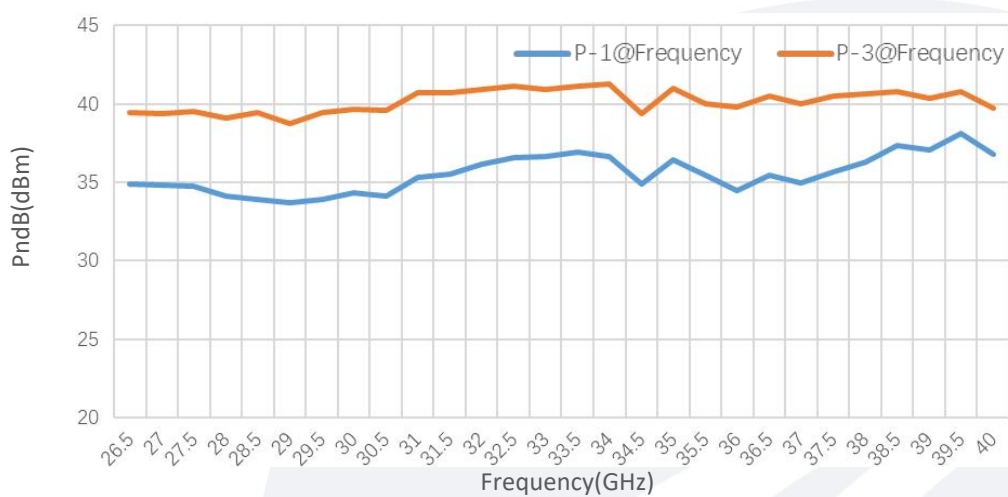


Pout@Pin

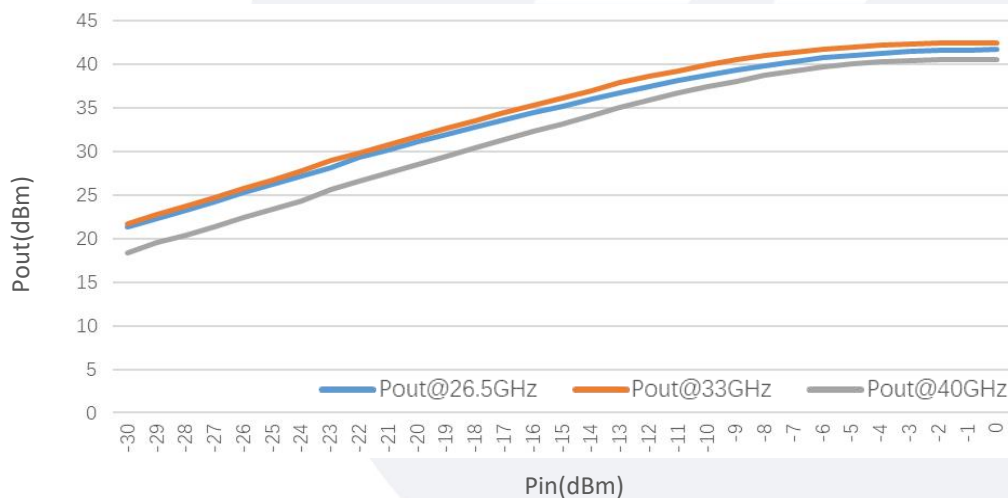

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

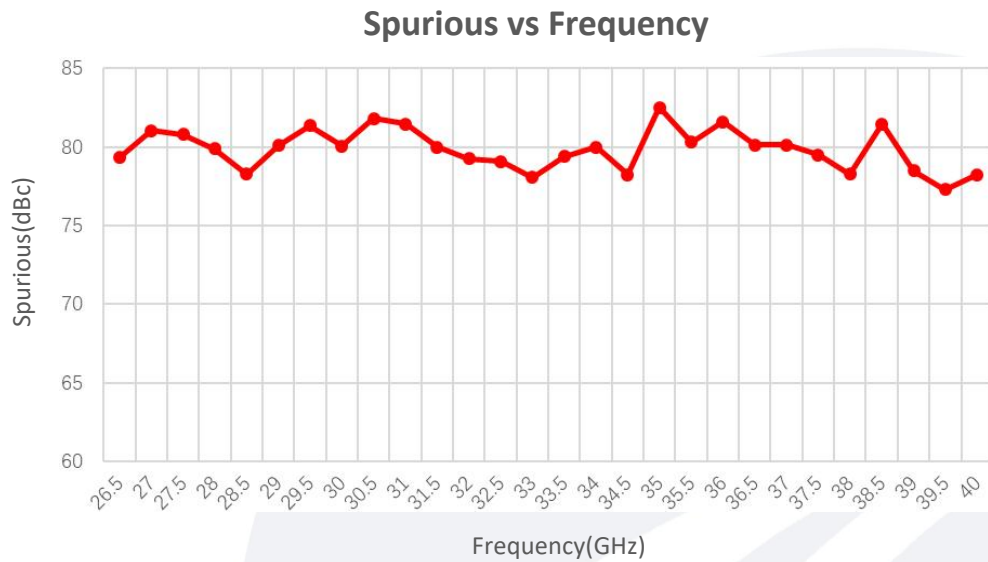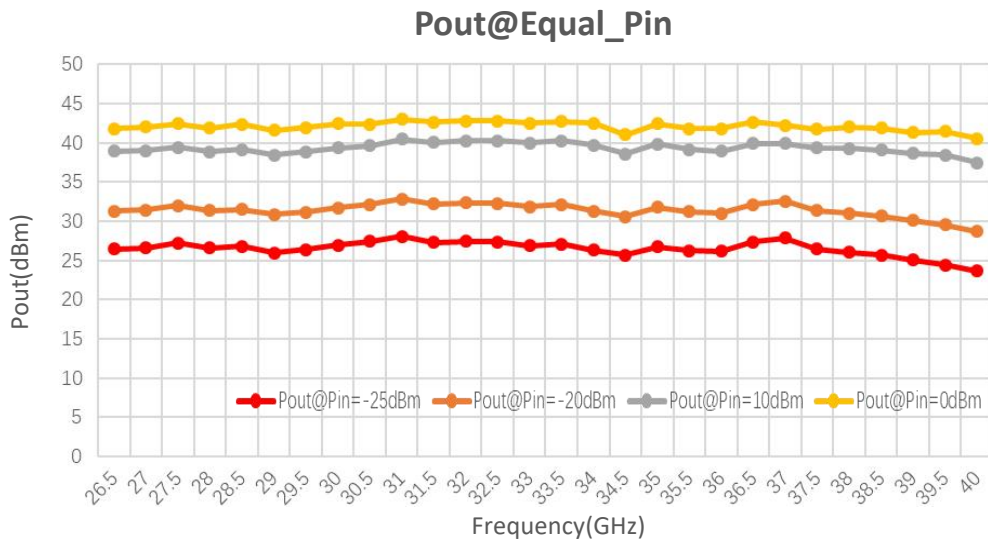

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.