Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Waveguide Bandpass Filter

WR137/5.8-6.8GHz

Model: TLBF-5.8G6.8G-40

TLBF-5.8G6.8G-40 is a waveguide bandpass filter with a passband frequency from 5.8 to 6.8 GHz and a rejection frequency at 4.8 GHz. The nominal insertion loss of the filter is 0.4 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 5.8 to 6.8 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	5.8		6.8	GHz
Passband Insertion Loss			0.4	dB
Rejection@4.8GHz	40			dBc
Passband VSWR			1.3	:1
Power Handling		110		W


Envrionmental And Physical Characteristics:

Parameter	Value	Units
Operating Temerature	-40 To +70	℃
Waveguide	WR137	

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

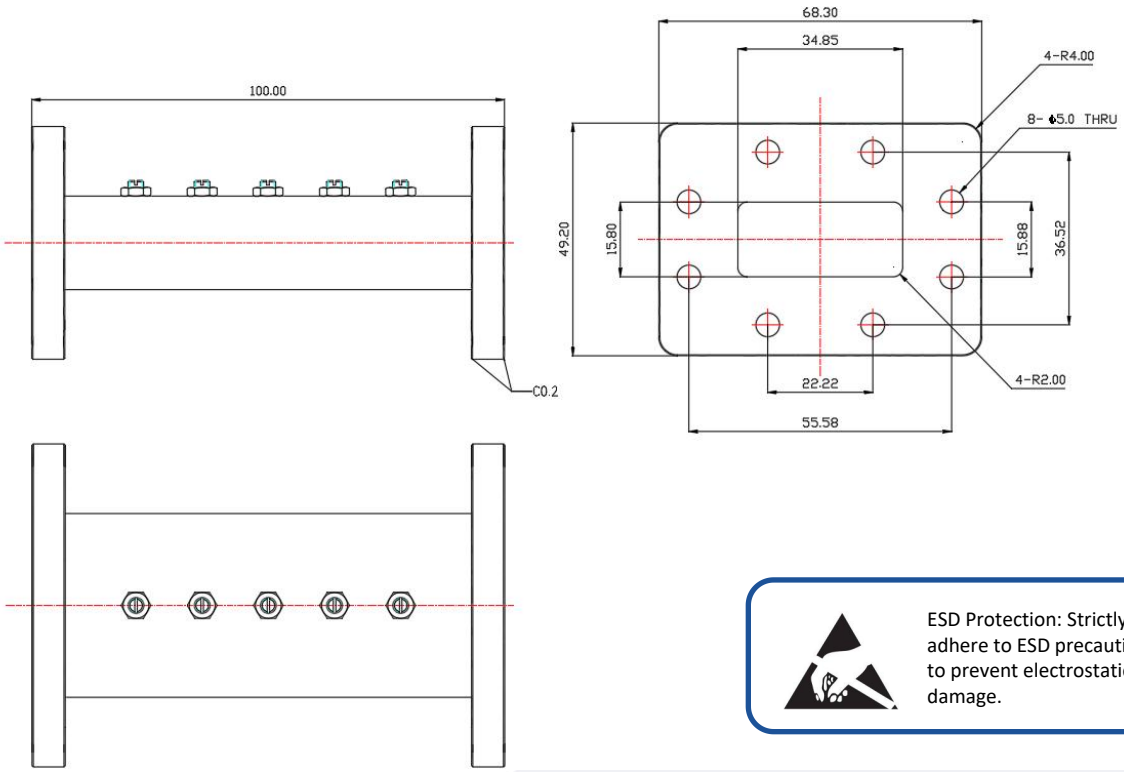

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-5.8G6.8G-40	Waveguide Bandpass Filter,5.8-6.8GHz, Insertion Loss:0.4dB, Rejection:40dBc@4.8GHz, WR137	Rev.1.0