

Solid State High Power Amplifier Systems

0.5-6GHz/57dB Gain/57dBm Psat/380V AC

Model: TLPA0.5G6G-57-57-BC

TLPA0.5G6G-57-57-BC is a solid state high power amplifier systems provides high output power and high gain across the 0.5 to 6 GHz frequency range. The amplifier features a built-in 380V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Frequency range: 0.5-6GHz
- Gain: 57dB Min
- Psat Output Power: 57dBm Min
- Protection: Over TEM, over voltage, over current, over VSWR protection
- 50 Ohm Matched Input / Output

Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	0.5-6			GHz
Power Gain	GP	57			dB
Gain flatness	ΔGL		± 3		dB
Gain adjust Range	ΔGR		30		dB
Gain adjust Step	ΔGS		0.5		dB
Output Psat	Psat	57			dBm
Spurious@Pout=57dBm	Spur			-60	dBc
Harmonics@Pout=57dBm	HAM		-10		dBc
Input VSWR	VSWRin			2.0	:1
AC Voltage	Vac		380		V AC
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	N Female/7/16 DIN Female	
Forward/Reverse Coupling	N Female/ N Female	
Communication Connector	DB9/RJ45	
Size	12U	mm
Weight	≤150	Kg




Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

Outline Drawing:

Unit:mm

Regulatory Compliance:

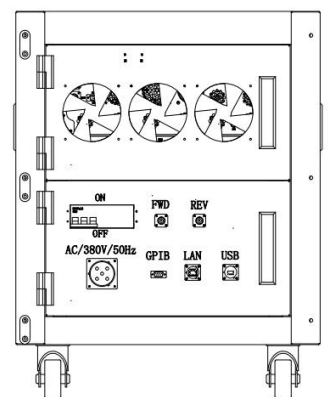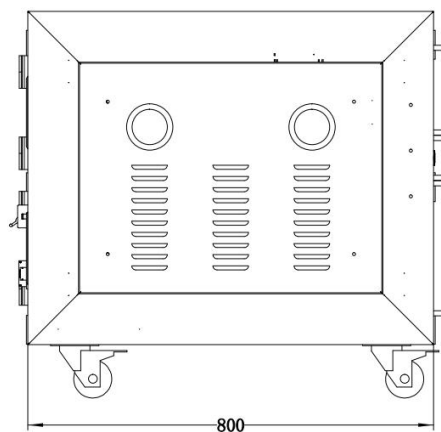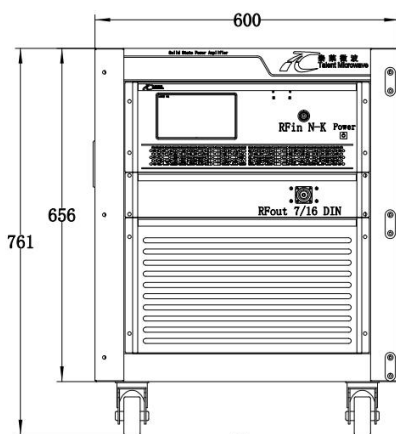

Key Features:

Parameter	Advantages
Control functions	1, Power/gain setting On/Off
Protection functions	1,Over TEM 2,Over voltage 3,Over current 4,Over VSWR
Remote control	RS422/LAN
Cooling system	Built in Cooling system,forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA0.5G6G-57-57-BC	Solid State High Power Amplifier Systems 0.5-6GHz,Gain:57dB,Psat:57 dBm,220V AC,Built in Fan Cooling	Rev.1.1