

Solid State High Power Amplifier Systems

1.2-1.4GHz/62dB Gain/62dBm Psat/220V AC

Model: TLPA1.2G1.4G-62-62-BC

TLPA1.2G1.4G-62-62-BC is a solid state high power amplifier systems provides high output power and high gain across the 1.2 to 1.4 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Frequency range: 1.2-1.4GHz
- Gain: 62dB Min
- Psat Output Power: 62dBm Min
- Protection: Over TEM, over voltage, over current, over VSWR protection
- 50 Ohm Matched Input / Output



Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	1.2-1.4			GHz
Power Gain	GP	62			dB
Gain flatness	ΔGL			± 2	dB
Gain adjust Range	ΔGR	30			dB
Gain adjust Step	ΔGS		0.5		dB
Output Psat	Psat	62			dBm
Noise Figure	NF			15	dB
Spurious@Pout=62dBm	Spur			-60	dBc
Harmonics@Pout=62dBm	HAM			-15	dBc
Input VSWR	VSWR _{in}			1.5	:1
Output VSWR	VSWR _{out}			2.5	:1
AC Voltage	Vac		220		V AC
Power Consumption	Pdiss		4500		W
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	N Female/N Female	
Forward/Reverse Coupling	SMA Female/ SMA Female	
Communication Connector	DB9/RJ45	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Size	19 Inch 5U	mm
Weight	≤45	Kg

Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

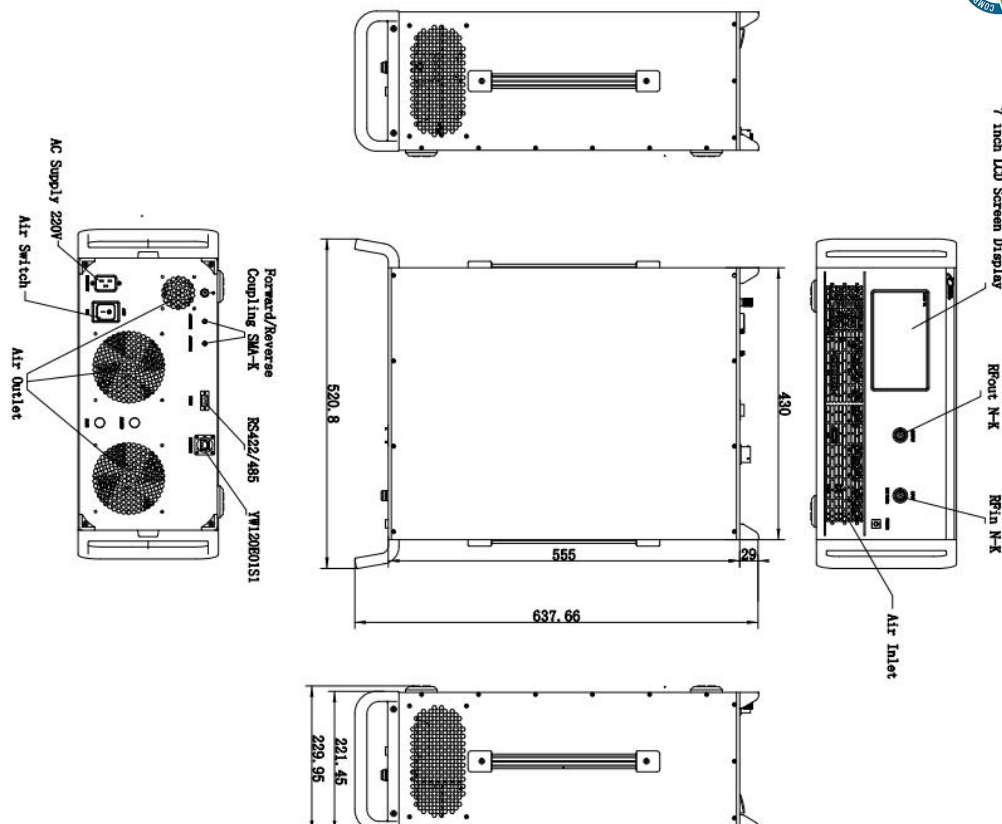

Regulatory Compliance:



Key Features:

Parameter	Advantages
Control functions	1, Power setting On/Off 2, ALC automatic level control 3, Gain control
Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Over VSWR
Remote control	RS422/Ethernet
Cooling system	Built in Cooling system, forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave, 3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA1.2G1.4G-62-62-BC	Solid State High Power Amplifier Systems 1.2-1.4GHz, Gain:62dB, Psat:62dBm, 220V AC, Built in Fan Cooling	Rev.1.1