

Solid State High Power Amplifier Systems

27-32GHz/53dB Gain/53dBm Psat/220V AC

Model: TLPA27G32G-53-53-BC

TLPA27G32G-53-53-BC is a solid state high power amplifier systems provides high output power and high gain across the 27 to 32 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Frequency range: 27-32GHz
- Gain: 53dB Min
- Psat Output Power: 53dBm Min
- Protection: Over TEM, over voltage, over current, over VSWR protection
- 50 Ohm Matched Input / Output



Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	27-32			GHz
Power Gain	GP	53			dB
Gain flatness	ΔGL		± 4		dB
Output Psat	Psat	53			dBm
Spurious	Spur			-55	dBc
Input VSWR	VSWR _{in}			2.0	:1
AC Voltage	V _{ac}		220		V AC
Power Consumption	P _{diss}			3000	W
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	2.92mm Female/WR28	
Forward/Reverse Coupling	2.92mm Female/2.92mm Female	
Size	19 Inch 5U	
Weight	≤45	Kg


Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

Outline Drawing:

Unit:mm

Regulatory Compliance:

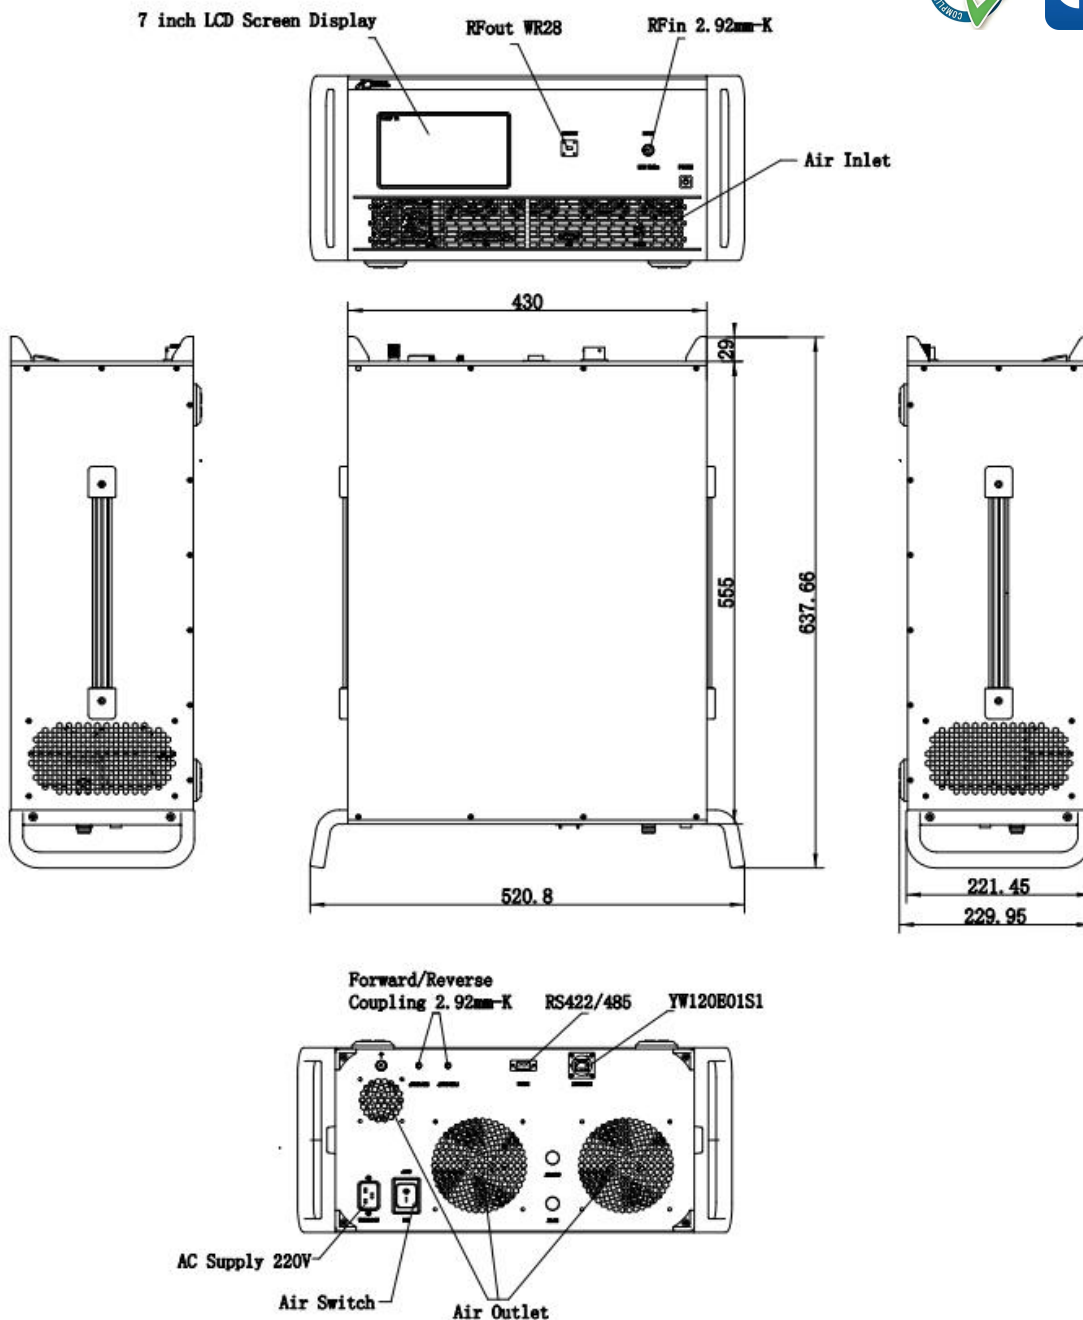

Key Features:

Parameter	Advantages
Control functions	Power setting on/off
Display functions	1,Current 2,Output/reflected power 3,Fault informations
Protection functions	1,Over TEM 2,Over voltage 3,Over current 4,Over VSWR
Remote control	RS422/Ethernet
Cooling system	Built in Cooling system,forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:


Base Number	Description	Revision
TLPA27G32G-53-53-BC	Solid State High Power Amplifier Systems 27-32GHz,Gain:53dB,Psat:53dBm,220V AC,Built in Fan Cooling	Rev.1.1

Typical Performance Data:


Small Signal Gain vs Frequency

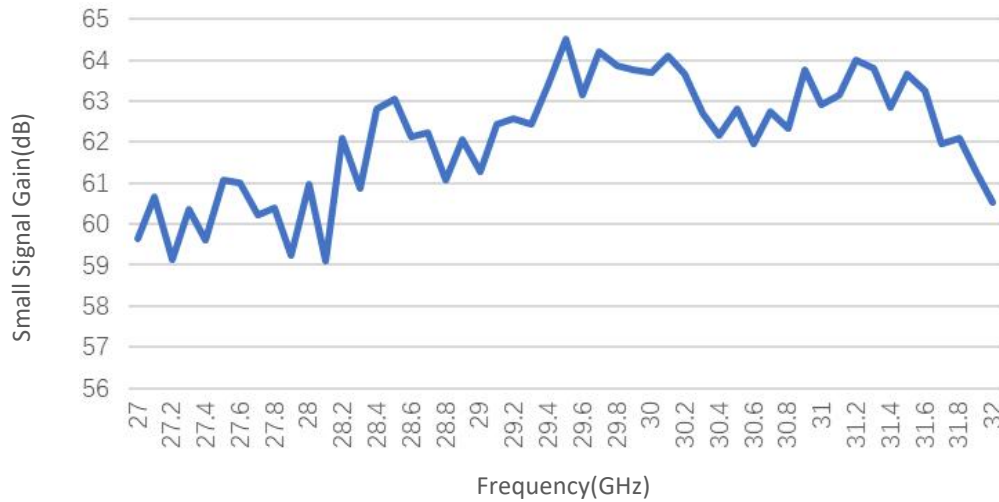

Input VSWR vs Frequency



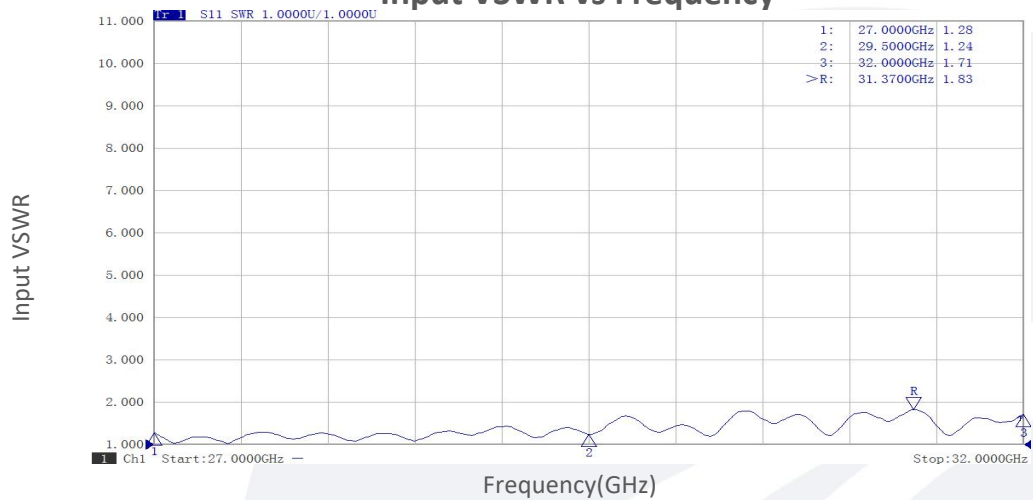


PndB vs Frequency

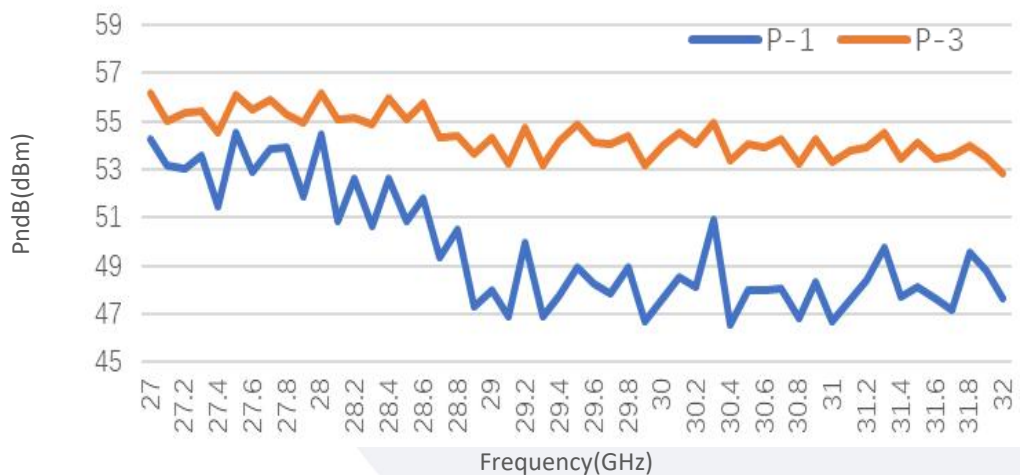

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

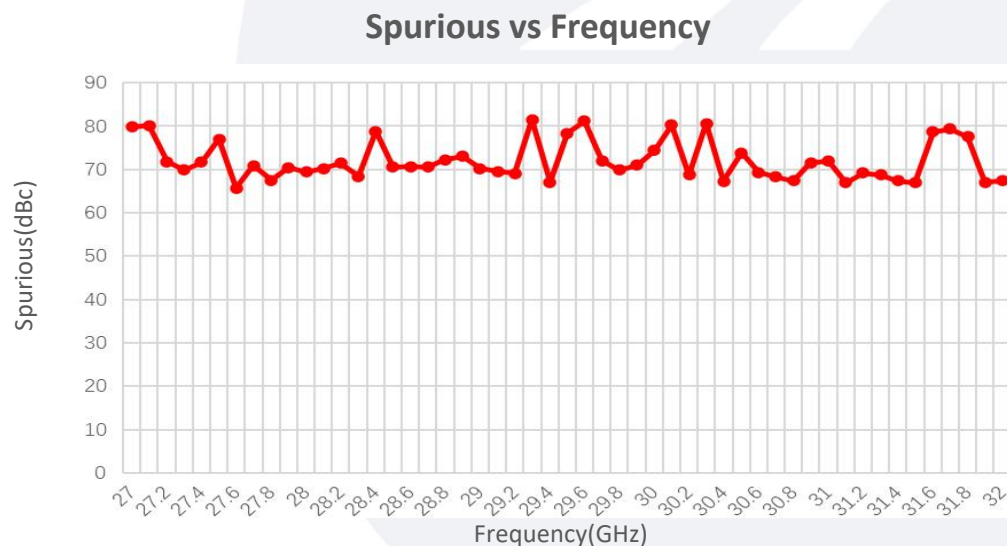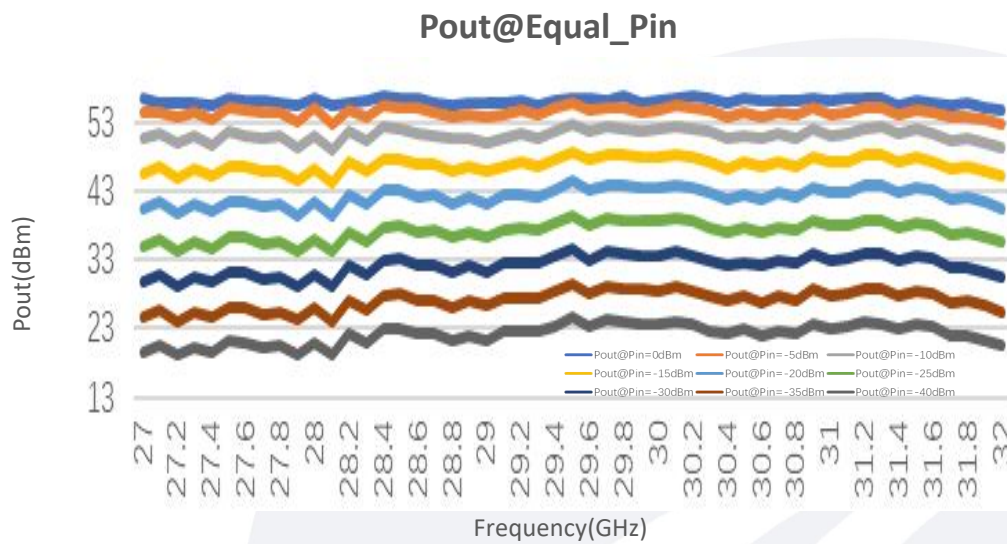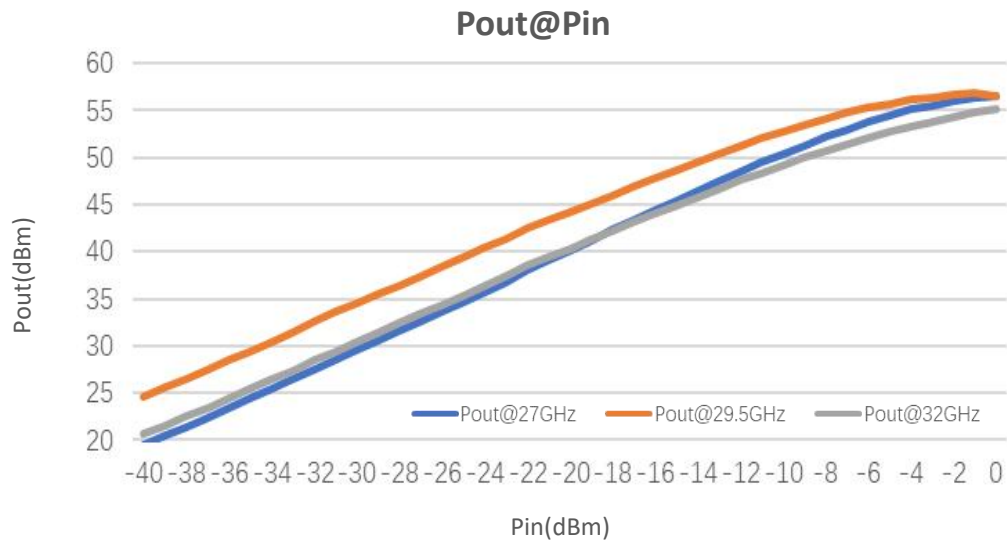

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.