


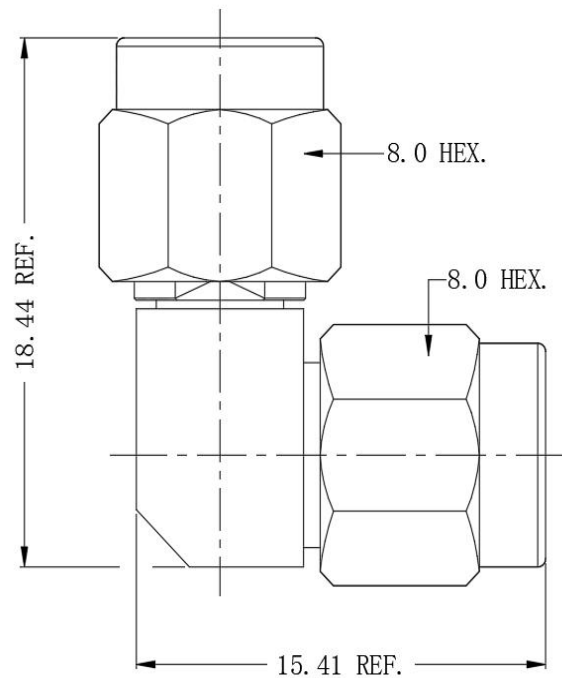

Electrical & Environmental Characteristics



Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~26.5GHz

Dielectric Withstanding Voltage	1000V
VSWR	≤1.25
Insertion Loss	≤0.40dB
Operating Temperature	- 55~+165℃

Material & Coat-Plating

Inner Conductor	BE-CU&Brass, Gold Plated
Dielectric	PTFE
Body&Nut	Passivation of stainless steel

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave,Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ± ANGLES ±1°	APVD	Product Model SMA-JWJG SMA Male-RA to SMA Male adaptor			
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE OT8L4	DRAWING NO	
		CUSTOMER DRAWING			SHEET1 OF 1	RVE 1

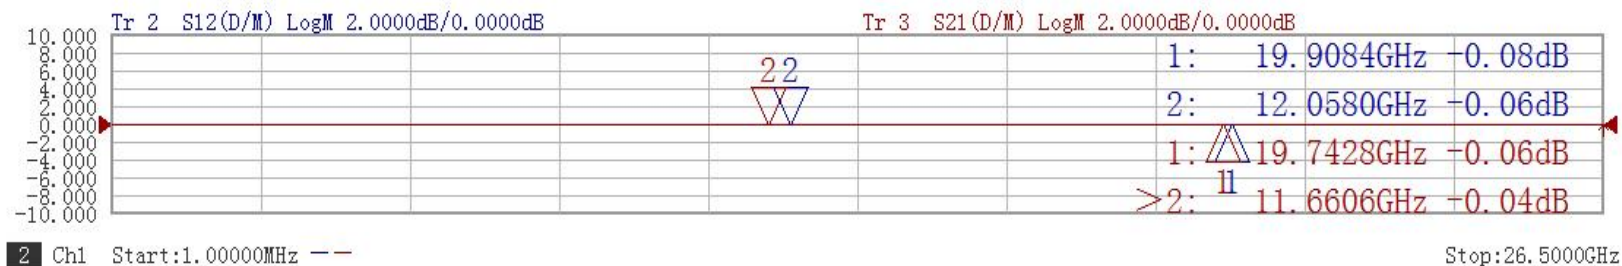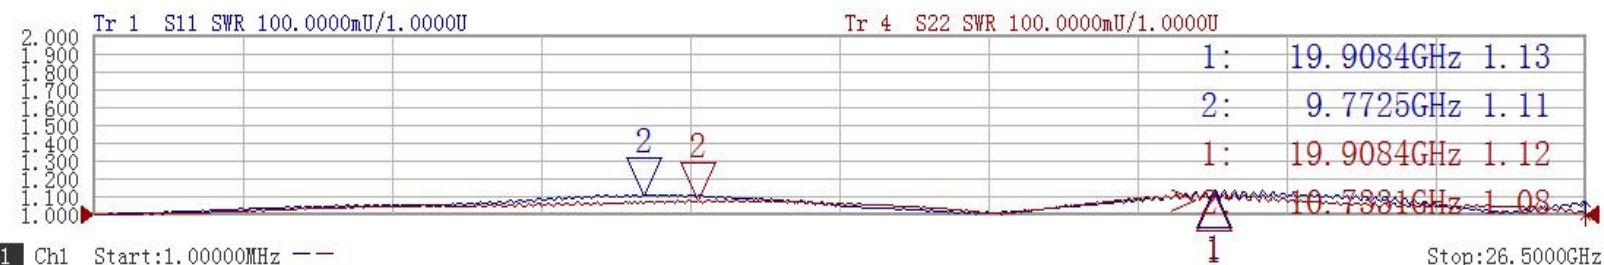

	SweepType	Start (GHz)	Stop (GHz)	Points	IF BW (Hz)	SweepTime (s)	Port1,2Power (dBm)
Ch1	LIN_SWEEP	0.001000000	26.500000000	801	1000	1.000000	-5.00, -5.00