


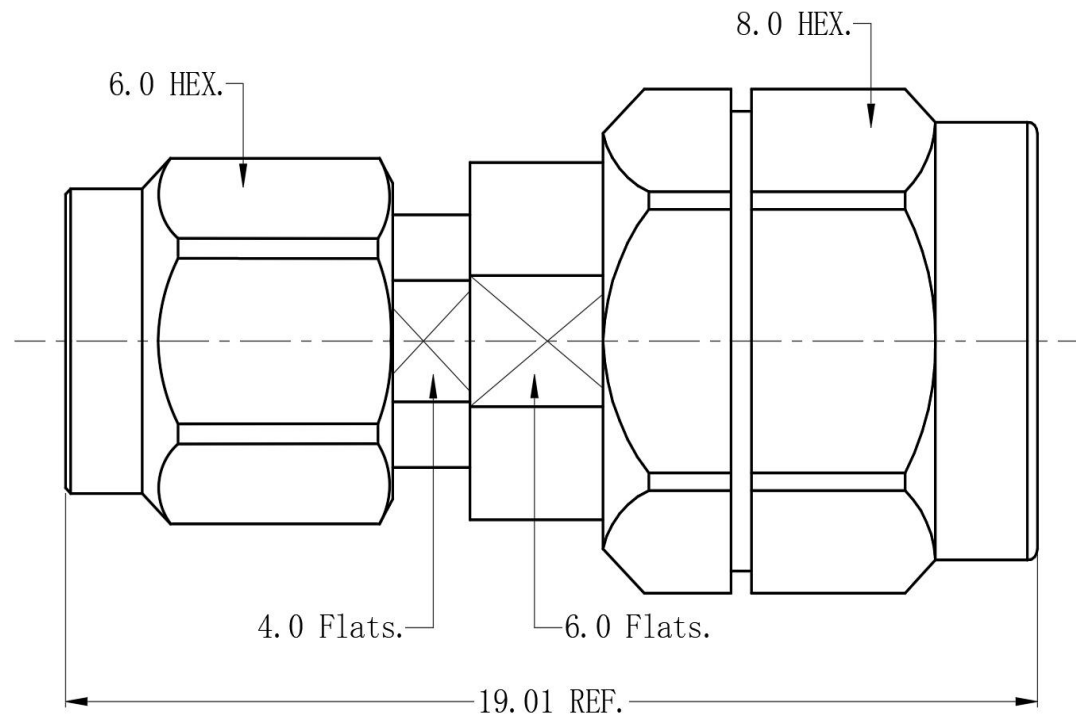

Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~50GHz
Dielectric Withstanding Voltage	500 V
VSWR	≤1.30
Insertion Loss	≤0.50dB
Operating Temperature	- 55~+125℃

Material & Coat-Plating

Inner Conductor	BE-CU, Gold Plated
Dielectric	PEI
Body&Nut	Stainless Steel, Passivated

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

Suzhou Talent Microwave,Inc

Unit
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLC ±0.25
1 PLC ±0.15
2 PLC ±0.12
3 PLC ±
3 PLC ±
ANGLES ±1°

APVD

PRODUCT
SPEC

APPLICATO
N SPEC

Product Model

1.0-2.4-JJG
1.0mm Male to 2.4mm Male adaptor

MATEIAL
SEE TABLE

FINISH
SEE TABLE

WEIGHT

SIZE



A4

GAGE CODE
0T8L4

DRAWING NO

CUSTOMER DRAWING

SHEET1 OF 1 RVE 1

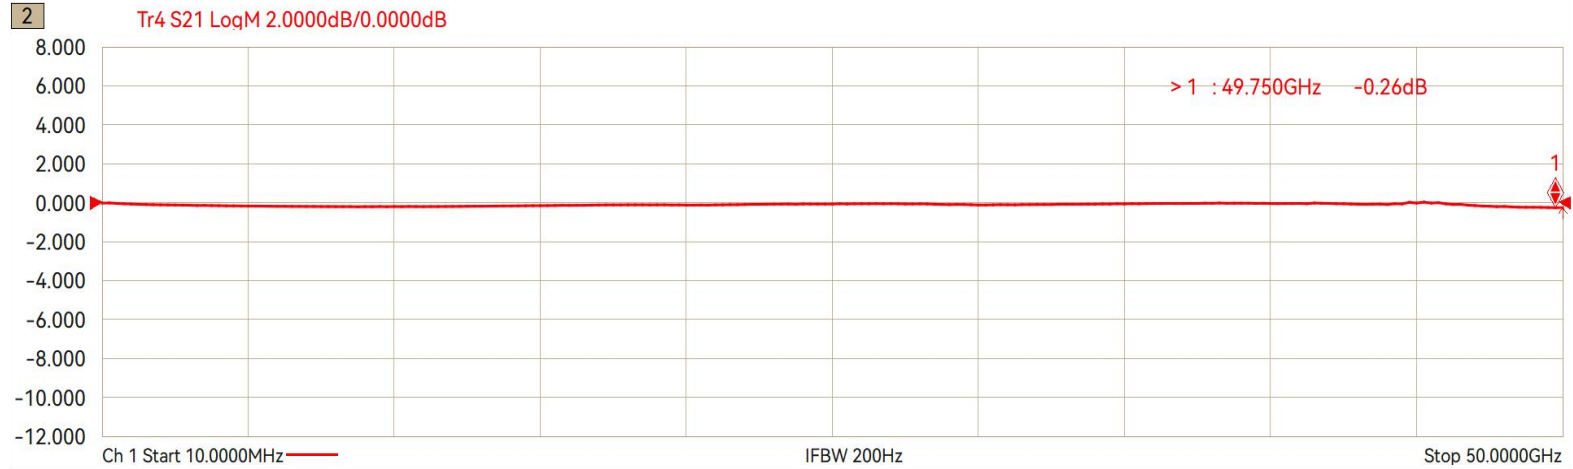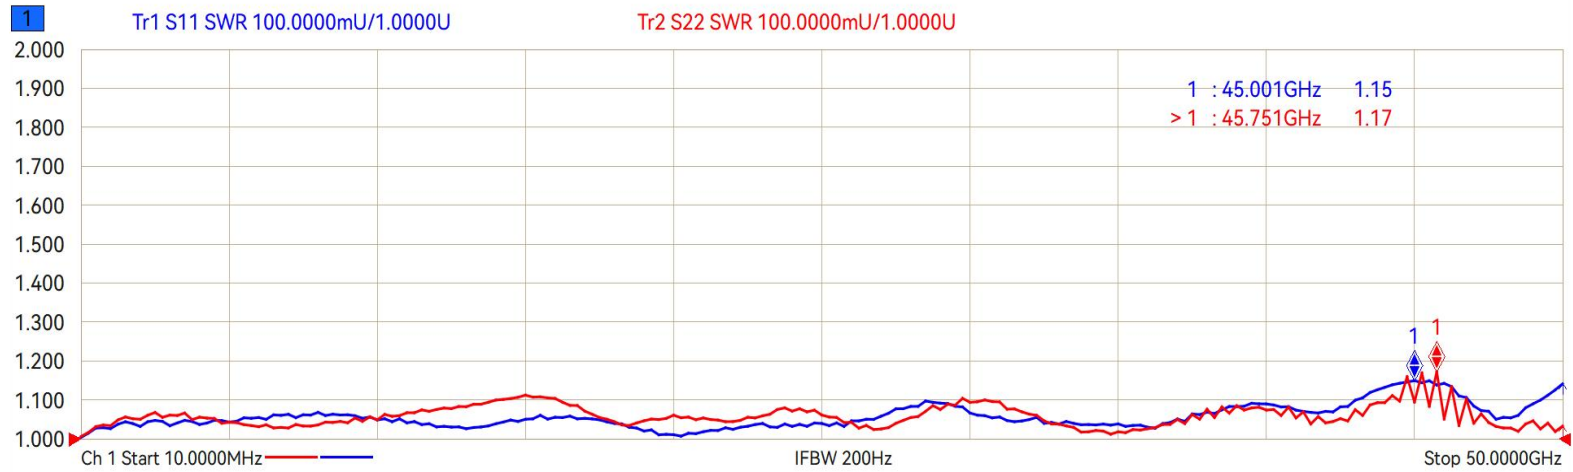

	Sweep Type	Start Freq(GHz)	Stop Freq(GHz)	Sweep Points	IF Bandwidth(Hz)	Sweep Time(s)	Port 1,2Power(dBm)
Ch 1	LIN Freq	0.01	50	201	200	0.944561	-5,-5