

Low Noise Amplifier

5-20GHz/3.0dB NF/35dB Gain/14.5dBm P1dB

Model: TLLA5G20G-35-30

TLLA5G20G-35-30 is a low noise amplifier with a minimum small signal gain of 35 dB and a nominal noise figure of 3.0 dB across the frequency range of 5 to 20 GHz. The DC power requirement for the amplifier is +12 V DC/150 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 5-20 GHz
- Gain: 35dB Min
- Noise Figure: 3.0dB Max
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	5		20	GHz
Small Signal Gain	35	37		dB
Gain Flatness		±1.5		dB
Noise Figure			3	dB
Output P1dB		14.5		dBm
Input VSWR			2	:1
Output VSWR			2	:1
DC Voltage	+10	+12	+18	V DC
DC Supply Current		150		mA
Impedance		50		Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm
Weight	55	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+20 V
RF Input Power	+15 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

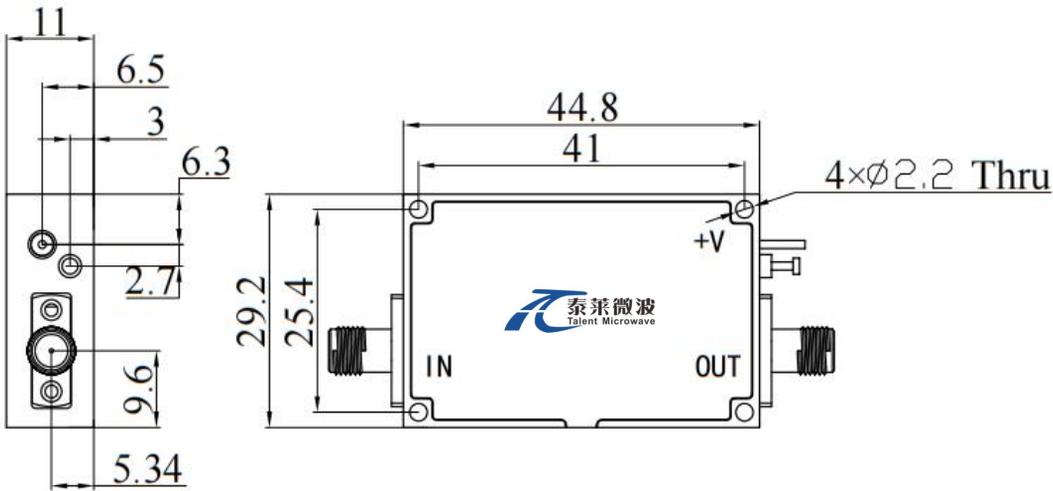

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Base Number	Description	Revision
TLLA5G20G-35-30	Low Noise Amplifier, 5-20GHz, Noise Figure:3.0dB, Gain:35dB,P1dB:14.5dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA5G20G-35-30-HS	Low Noise Amplifier, 5-20GHz, Noise Figure:3.0dB, Gain:35dB,P1dB:14.5dBm,+12V DC,With Heatsink	Rev.1.1

Typical Performance Data:

Gain&VSWR vs Frequency

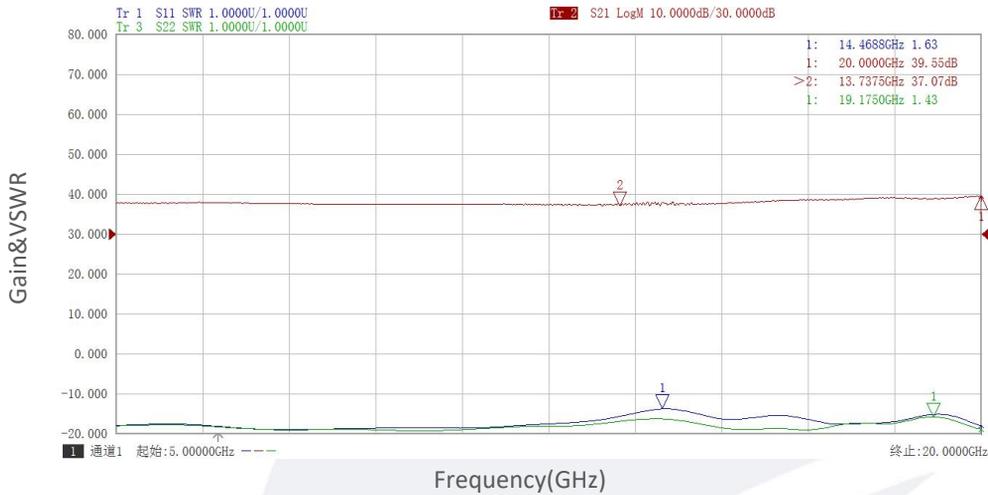


Noise Figure vs Frequency

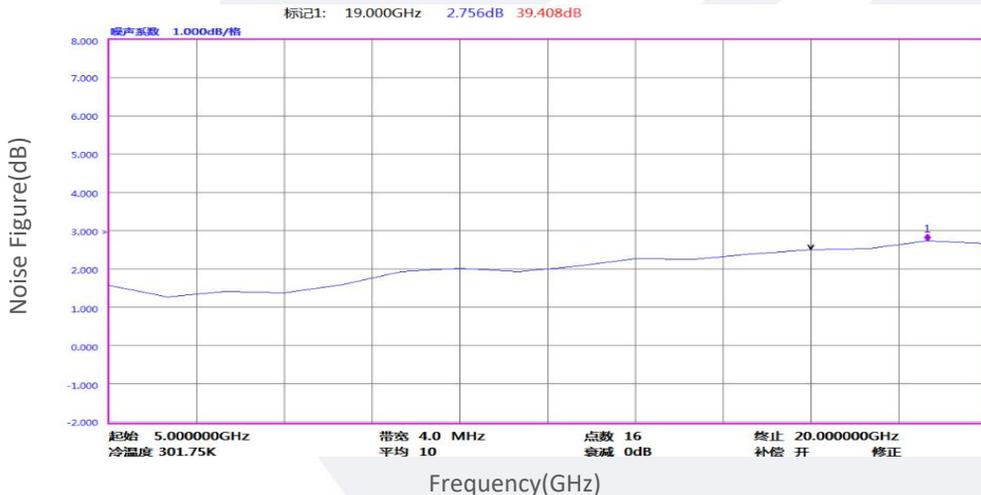


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

P1dB vs Frequency

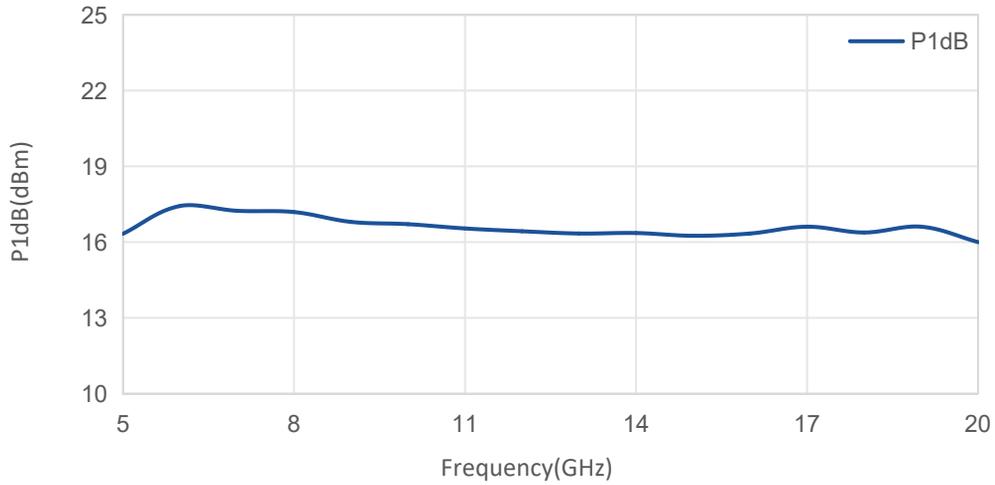

Psat vs Frequency

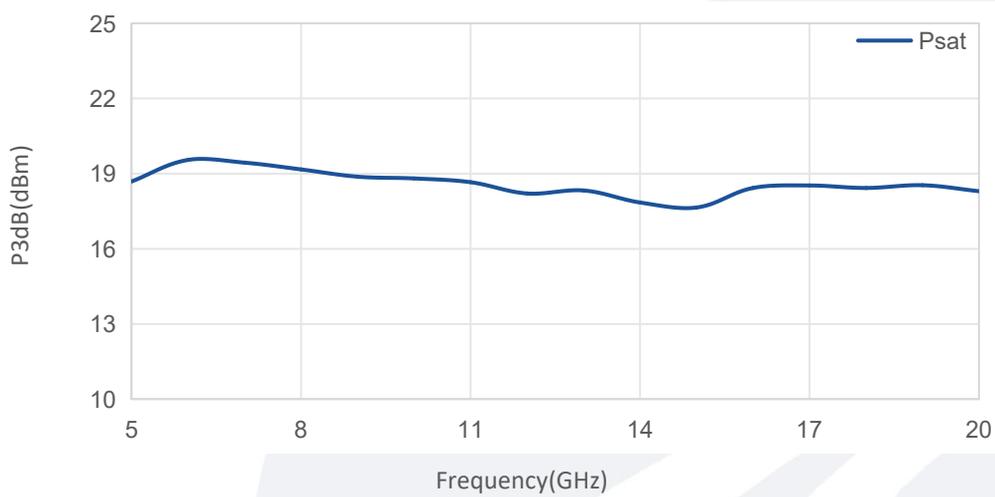

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.