

Low Noise Amplifier

35-50GHz/3.5dB NF/35dB Gain/15dBm P1dB

Model: TLLA35G50G-35-35

TLLA35G50G-35-35 is a low noise amplifier with a typical small signal gain of 35 dB and a nominal noise figure of 3.5 dB across the frequency range of 35 to 50 GHz. The DC power requirement for the amplifier is +12 V DC/130 mA. The input and output port configuration offers coax adapter structure with 2.4mm female.

Features:

- Frequency range: 35-50GHz
- Gain: 35dB Typ
- Noise Figure: 3.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	35		50	GHz
Small Signal Gain	30	35		dB
Gain Flatness		±1.5		dB
Noise Figure		3.5	4	dB
Output P1dB	10	15		dBm
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage		+12		V DC
DC Supply Current		130		mA
Impedance		50		Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.4mm Female/2.4mm Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	0 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

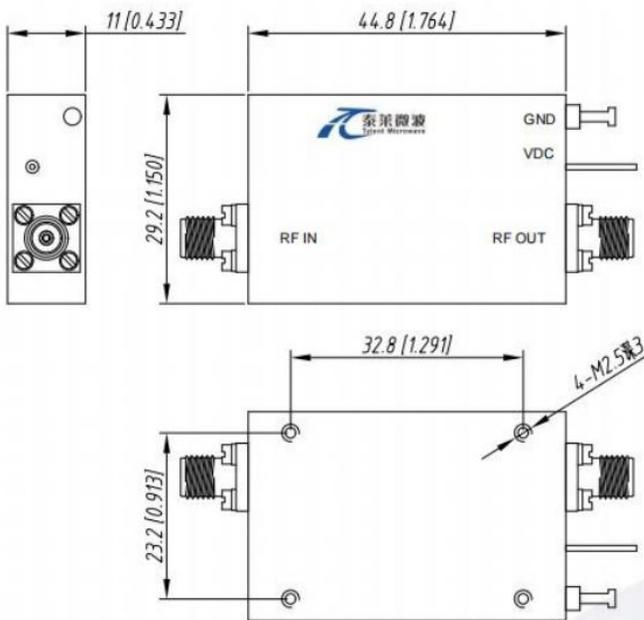

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLLA35G50G-35-35	Low Noise Amplifier, 35-50GHz, Noise Figure:3.5dB, Gain:35dB,P1dB:15dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA35G50G-35-35-HS	Low Noise Amplifier, 35-50GHz, Noise Figure:3.5dB, Gain:35dB,P1dB:15dBm,+12V DC,With Heatsink	Rev.1.1

Typical Performance Data:

Gain&VSWR vs Frequency

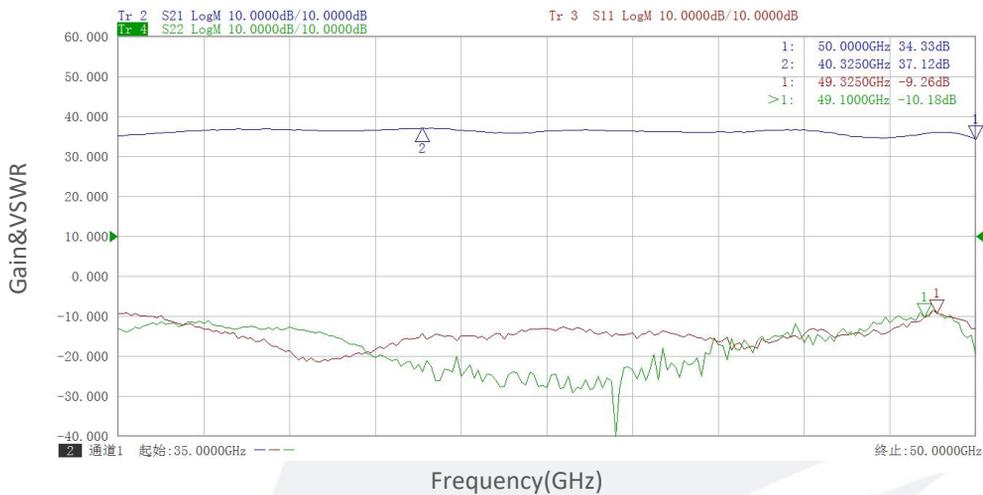


Noise Figure vs Frequency



Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Gain vs Output Power

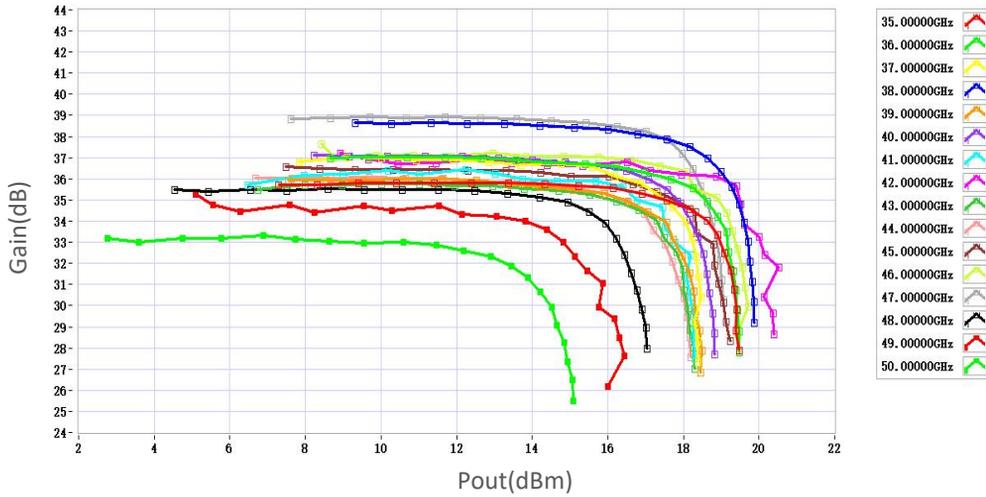

P1dB vs Frequency




P3dB vs Frequency

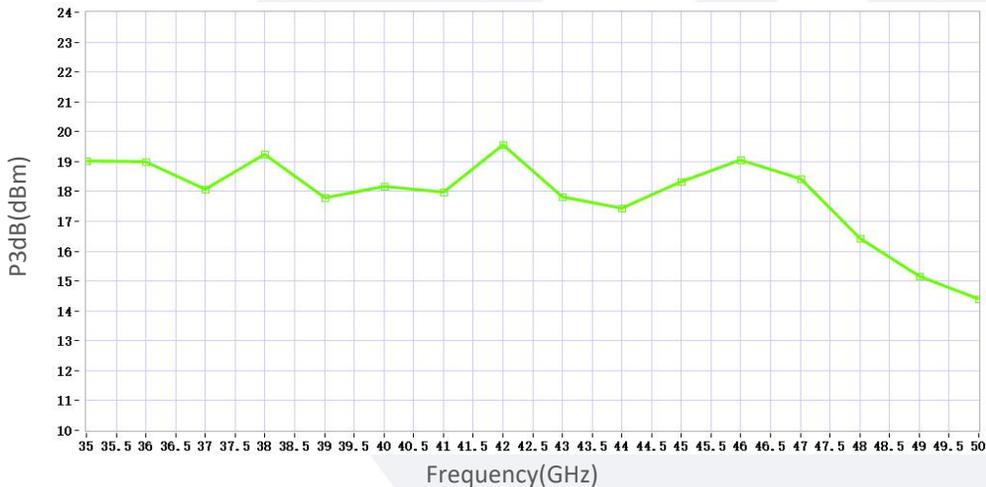

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Psat vs Frequency

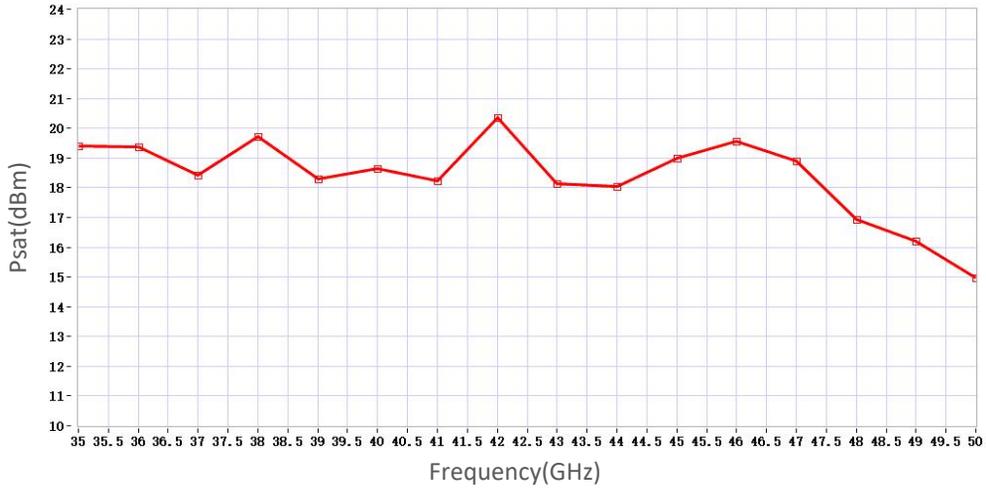

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.