

Low Noise Amplifier

0.1-18GHz/2.5dB NF/30dB Gain/16dBm P1dB

Model: TLLA0.1G18G-30-25

TLLA0.1G18G-30-25 is a low noise amplifier with a minimum small signal gain of 30 dB and a nominal noise figure of 2.5 dB across the frequency range of 0.1 to 18 GHz. The DC power requirement for the amplifier is +12 V DC/130 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 0.1-18GHz
- Gain: 30dB Min
- Noise Figure: 2.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.1		18	GHz
Small Signal Gain	30			dB
Gain Flatness		±2.0	±3	dB
Noise Figure		2.5	3.0	dB
Output P1dB	15	16		dBm
Output IP3		25		dBm
Input VSWR		2.0	2.2	:1
Output VSWR		1.8	2.0	:1
DC Voltage		+12		V DC
DC Supply Current		130		mA
Impedance	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

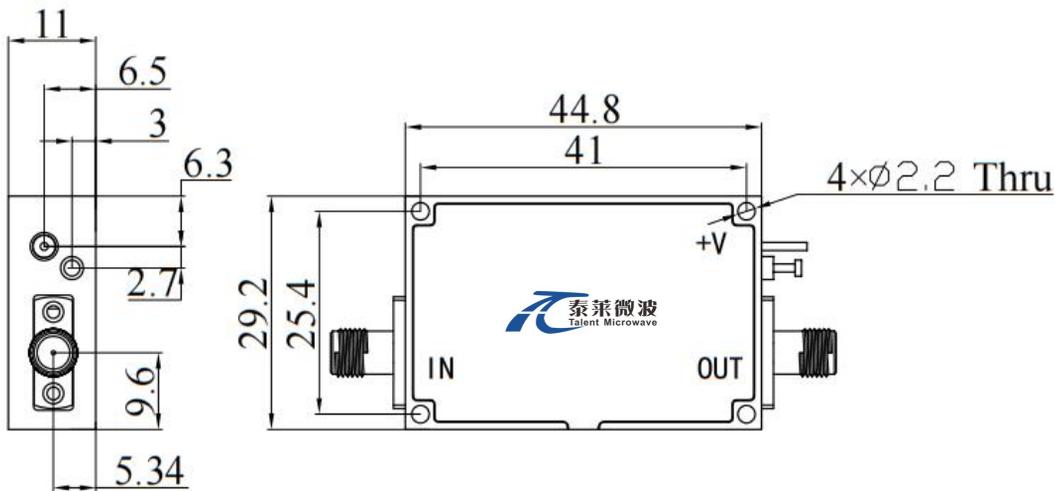

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Base Number	Description	Revision
TLLA0.1G18G-30-25	Low Noise Amplifier, 0.1-18GHz, Noise Figure:2.5dB, Gain:30 dB,P1dB:16dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA0.1G18G-30-25-HS	Low Noise Amplifier, 0.1-18GHz, Noise Figure:2.5dB, Gain:30 dB,P1dB:16dBm,+12V DC,With Heatsink	Rev.1.1

Typical Performance Data:

Gain&VSWR vs Frequency


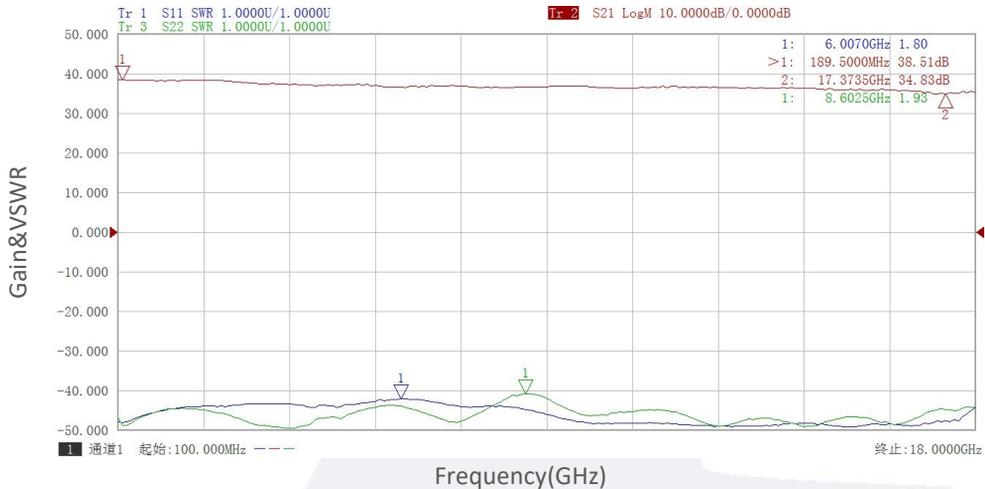


Noise Figure vs Frequency

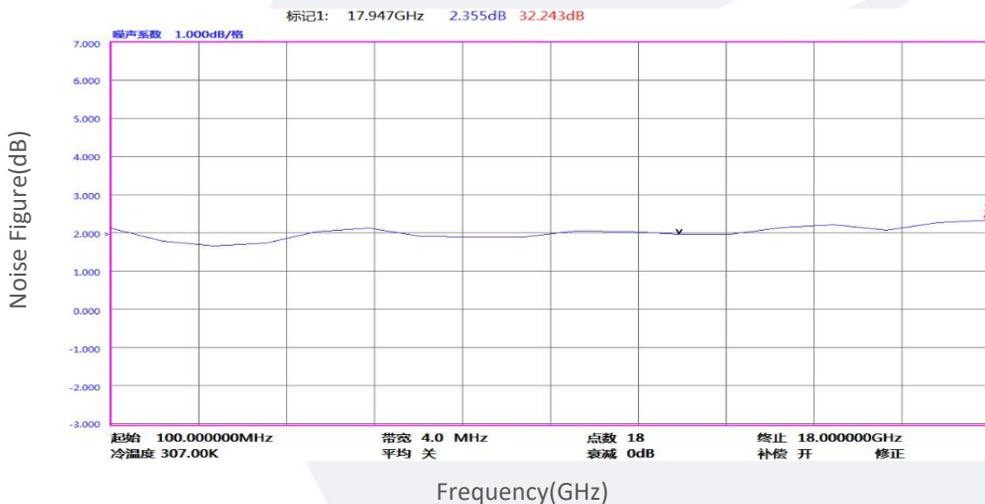

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

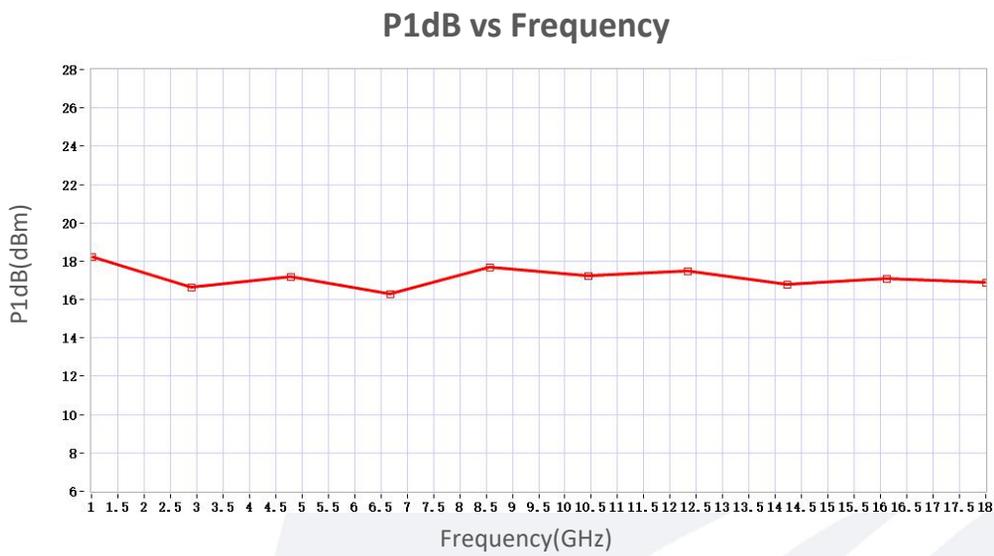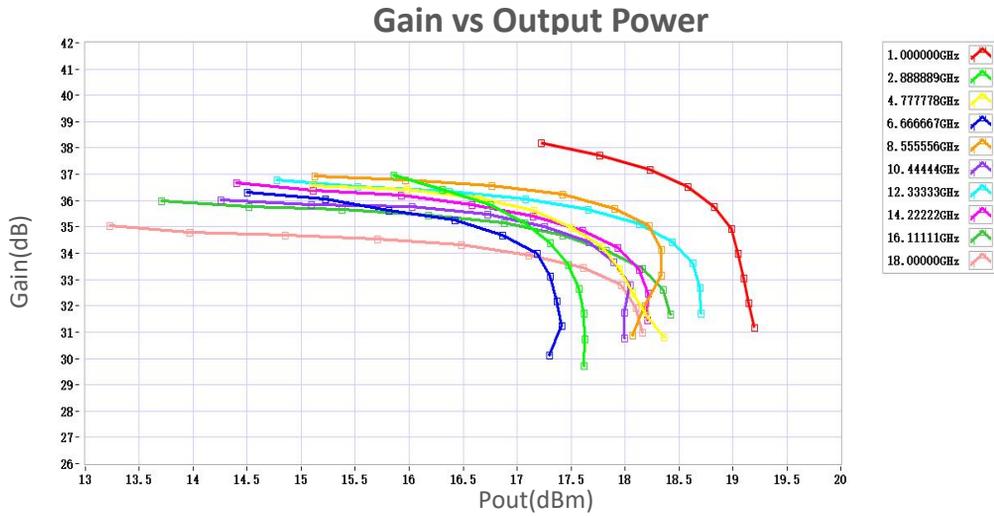

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.