

Low Noise Amplifier

0.3-20GHz/3.0dB NF/14dB Gain/11dBm P1dB

Model: TLLA0.3G20G-14-30

TLLA0.3G20G-14-30 is a low noise amplifier with a typical small signal gain of 14 dB and a nominal noise figure of 3.0 dB across the frequency range of 0.3 to 20 GHz. The DC power requirement for the amplifier is +12 V DC/70 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 0.3-20GHz
- Gain: 14dB Typ
- Noise Figure: 3.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.3		20	GHz
Small Signal Gain	11	14		dB
Gain Flatness		±3	±5	dB
Noise Figure		3.0	3.8	dB
Output P1dB		11		dBm
Output IP3		20		dBm
Input VSWR		1.6	2.0	:1
Output VSWR		1.5	2.0	:1
DC Voltage		+12		V DC
DC Supply Current		70		mA
Impedance	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	17*17*8	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

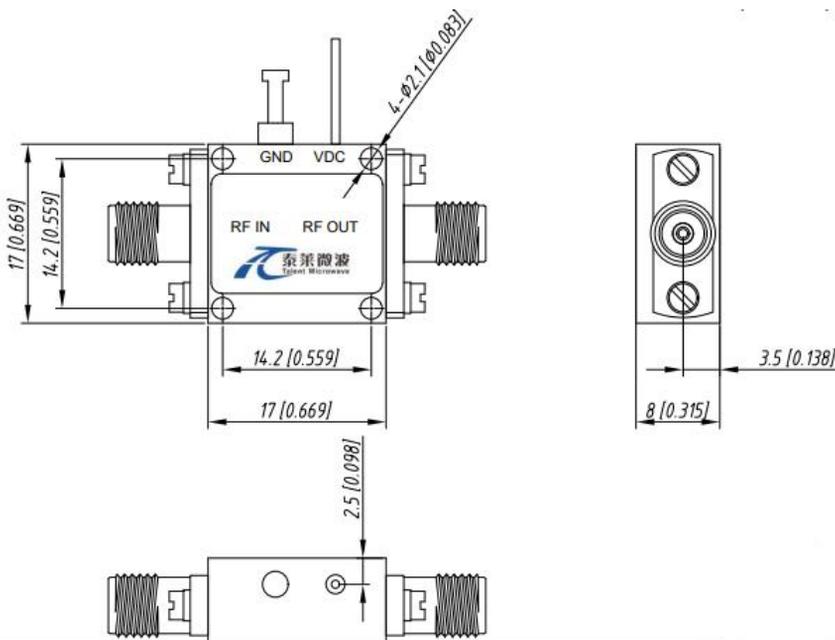

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLLA0.3G20G-14-30	Low Noise Amplifier, 0.3-20GHz, Noise Figure:3.0dB, Gain: 14dB,P1dB:11dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA0.3G20G-14-30-HS	Low Noise Amplifier, 0.3-20GHz, Noise Figure:3.0dB, Gain: 14dB,P1dB:11dBm,+12V DC,With Heatsink	Rev.1.1