

Coaxial Band-pass Filter

26.9-27.1GHz/ 2.92 Female

Model: TLBF-27G-200M-A

TLBF-27G-200M-A is a coaxial band-pass filter with a passband frequency from 26.9 to 27.1 GHz and a rejection frequencies 26GHz and 28GHz. The nominal insertion loss of the filter is 1.6dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range 26.9 to 27.1 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	26.9		27.1	GHz
Passband Insertion Loss			1.6	dB
Pass Band Ripple			1.4	dB
Rejection	>50dB@f0±1GHz			dB
Power Handling			20	W
Input VSWR			1.5	:1
Output VSWR			1.5	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Storage Temperature	-40 to +70	°C
Connectors	2.92 Female	

Outline Drawing:

Unit:mm;

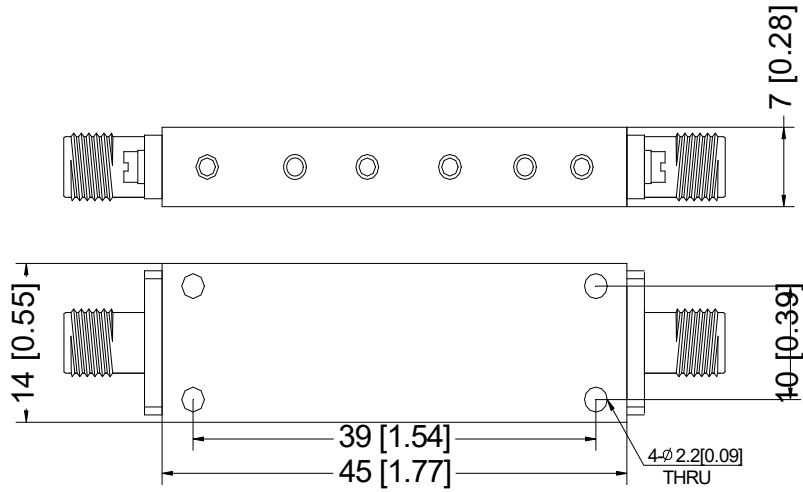

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

标 Base Number	描述 Description	版本号 Revision
TLBF-27G-200M-A	Coaxial Band-pass Filter, Passband frequency range: 26.9 to 27.1GHz , Passband Insertion Loss: 1.6dB, 2.92 Female	Rev.1.0