Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Power Amplifier

WR-19/40-60GHz/30dB Gain/36dBm Psat Model: TMPA-040060-3036-19

TMPA-040060-3036-19 is a power amplifier with a typical small signal gain of 30 dB and a nominal Psat of 36 dBm across the frequency range of 40 to 60 GHz. The DC power requirement for the amplifier is +19 VDC/1.5 A. The input and output port configuration offers an inline structure with WR-19 waveguides and UG-383/U-M anticocking flanges.

Features:

- Frequency range: 40-60GHz
- Gain: 30dB Typ
- Output Power Psat: 36dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	40		60	GHz
Small Signal Gain		30		dB
Output Psat		36		dBm
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage		19		V DC
DC Supply Current		1.5		A

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	WR-19/UG-383/U	
DC Supply Connector	J30J-9ZKP	Pin1~4: +19V Pin5~9: GND
Size	90*50*31	mm


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+24 V
RF Input Power	+19 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

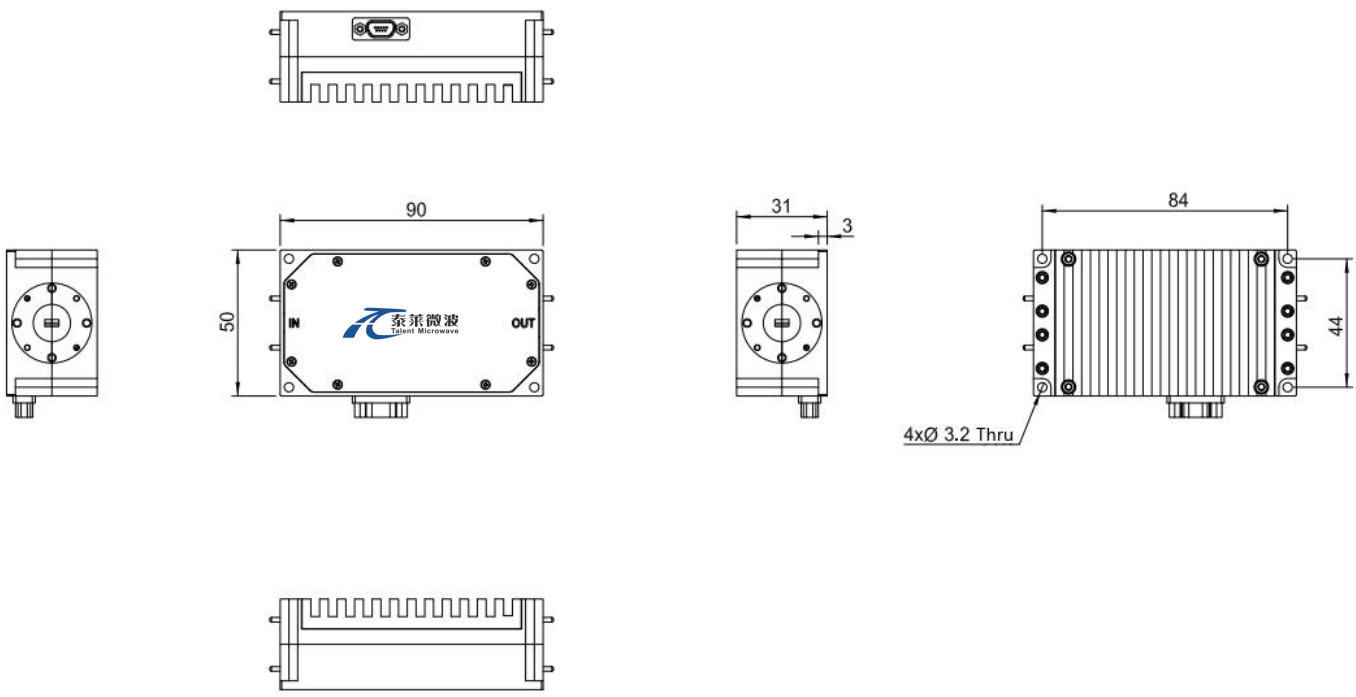

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	℃
Non-operating Temperature	-45		+85	℃
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMPA-040060-3036-19	Power Amplifier, 40-60GHz, Gain: 30dB Type, Psat: 36dBm Type, +19V DC,WR-19, Without heasink	Rev.1.1
TMPA-040060-3036-19-HS	Power Amplifier, 40-60GHz, Gain: 30dB Type, Psat: 36dBm Type, +19V DC,WR-19, With heatsink	Rev.1.1


Typical Performance Data:

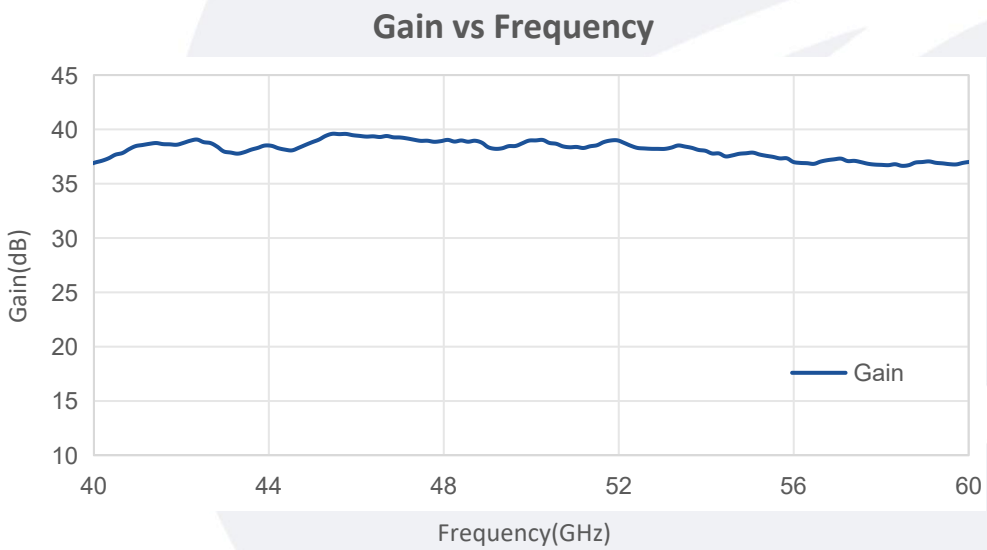

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

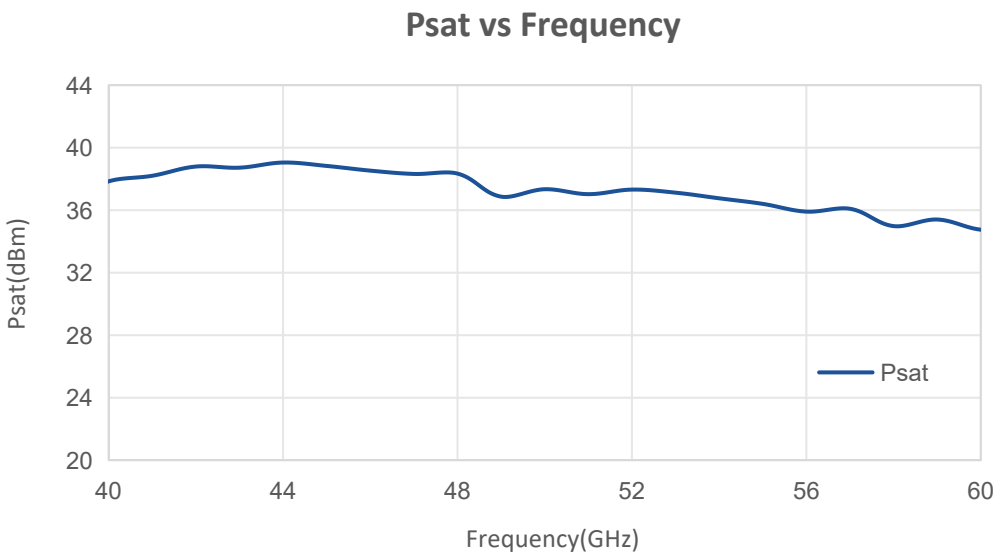

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.