

Power Amplifier

1-5GHz/40dB Gain/40dBm Psat

Model: TLPA1G5G-40-40

TLPA1G5G-40-40 is a power amplifier with a minimum small signal gain of 40 dB and a minimum Psat of 40 dBm across the frequency range of 1 to 5 GHz. The DC power requirement for the amplifier is +28 VDC/3 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 1-5GHz
- Gain: 40dB Min
- Output Power Psat: 40dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	1		5	GHz
Small Signal Gain	40	42		dB
Gain Flatness		±3		dB
Output P1dB		38		dBm
Output Psat	40	41		dBm
Input VSWR		1.5	2	:1
DC Voltage		+28		V DC
DC Supply Current			3	A
Impedance	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Feedthru capacitors	
Size	60*60*11(Without heatsink) 188*125*146(With heatsink)	mm
Weight	≤200	g




Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+29 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

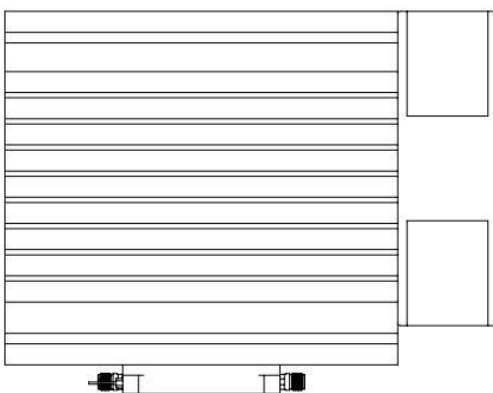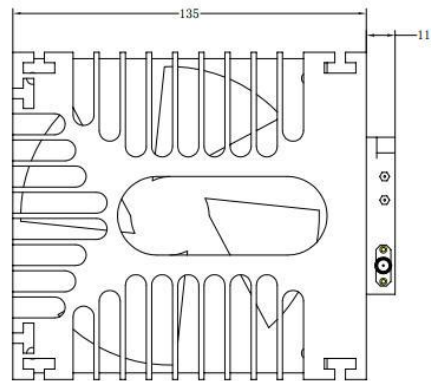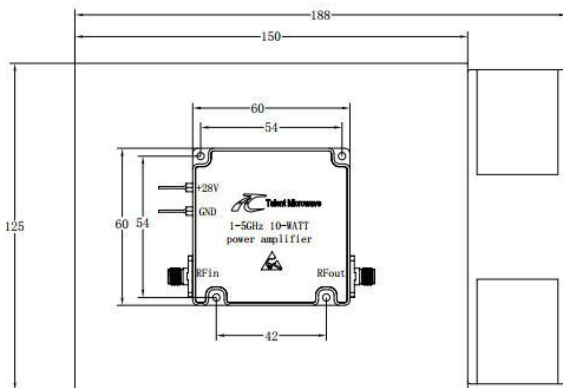

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA1G5G-40-40	Power amplifier 1-5GHz, Gain:40dB,Psat:40dBm,+28V DC,Without Heatsink	Rev.1.1
TLPA1G5G-40-40-HS	Power amplifier 1-5GHz, Gain:40dB,Psat:40dBm,+28V DC,With Heatsink	Rev.1.1