

## Power Amplifier

### 8-12GHz/45dB Gain/45dBm Psat

**Model: TLPA8G12G-45-45**

TLPA8G12G-45-45 is a power amplifier with a minimum power gain of 45 dB and a minimum Psat of 45 dBm across the frequency range of 8 to 12 GHz. The DC power requirement for the amplifier is +28 VDC/150 W. The input and output port configuration offers coax adapter structure with SMA female.

#### Features:

- Frequency range: 8-12GHz
- Gain: 45dB Min
- Output Power Psat: 45dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

#### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

#### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	8		12	GHz
Power Gain	45			dB
Gain Flatness		±3		dB
Output Psat	45			dBm
Spurious@Pout=45dBm			-60	dBc
Harmonic@Pout=45dBm			-15	dBc
Input VSWR			2	:1
DC Voltage		28		V DC
Power Consumption			150	W
Impedance		50		Ohms

## Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Femlae/SMA Female	
DC Bias	Feedthru capacitors	
Size	60*60*11(Without heatsink) 188*125*146(With heatsink)	mm
Weight	≤200	g




## Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+29 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



## Outline Drawing:

Unit:mm

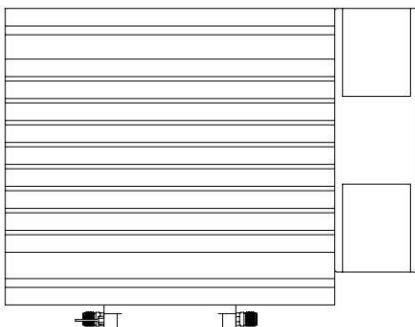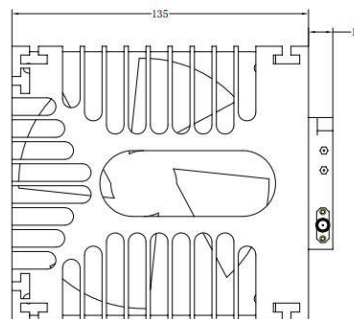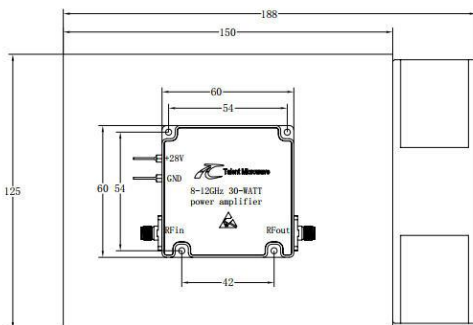

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

### Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+50	°C
Non-operating Temperature*	-50		+60	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

### Ordering Information:

Base Number	Description	Revision
TLPA8G12G-45-45	Power amplifier 8-12GHz, Gain:45dB,Psat:45dBm,+28V DC,Without Heatsink	Rev.1.1
TLPA8G12G-45-45-HS	Power amplifier 8-12GHz, Gain:45dB,Psat:45dBm,+28V DC,With Heatsink	Rev.1.1