泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coaxial DC Block

30KHz-110GHz/1.0 mm/25V

Model:TDCB1M1F-3

The TDCB1M1F-3 is a 1.0mm coaxial DC block that prevents the flow of DC current in the frequency range of 30KHz to 110GHz. The DC block has a typical insertion loss of 2.5dB, a typical Return Loss of -12dB. It is manufactured with 1.0mm female/male connectors for convenient circuit insertion. The breakdown voltage is +25 Volts.

Features:

- Operating Frequency 30KHz to 110GHz
- High Return Loss
- Low Cost

Applications:

- laboratory test
- Instrumentations
- System Integration

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	30KHz		110GHz	
Return Loss		-12		dB
Insertion Loss		2.5		dB
Breakdown Voltage		25		V
Group Delay		80		ps
Impedance		50		Ohms


Envrionmental And Physical Characteristics:

Parameter	Value	Units
Body Material	Copper	
Finish	Gold plated	
Inner Conductor	Becu,Golden	
Connectors	1.0mm Female/1.0mm Male	
Length	23.2*9.5*9.5	mm
Working Temperature	-40° to +70° C, operating	

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:


Unit:mm; Tolerance:±0.1mm

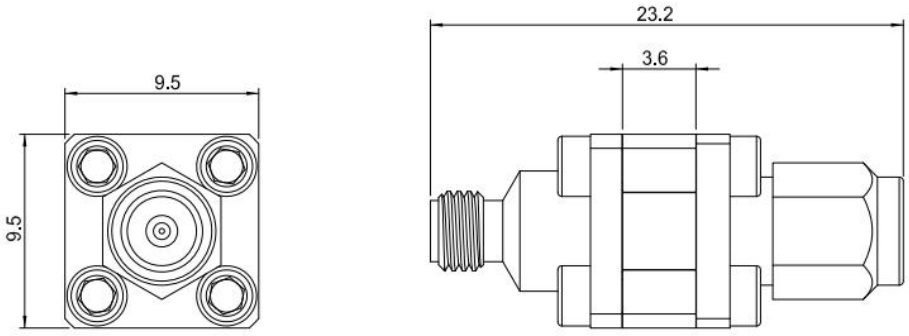

Ordering Information:

Base Number	Description
TDCB1M1F-3	30KHz-110GHz,25V,1.0mm Coaxial DC Block


Typical Performance Data:

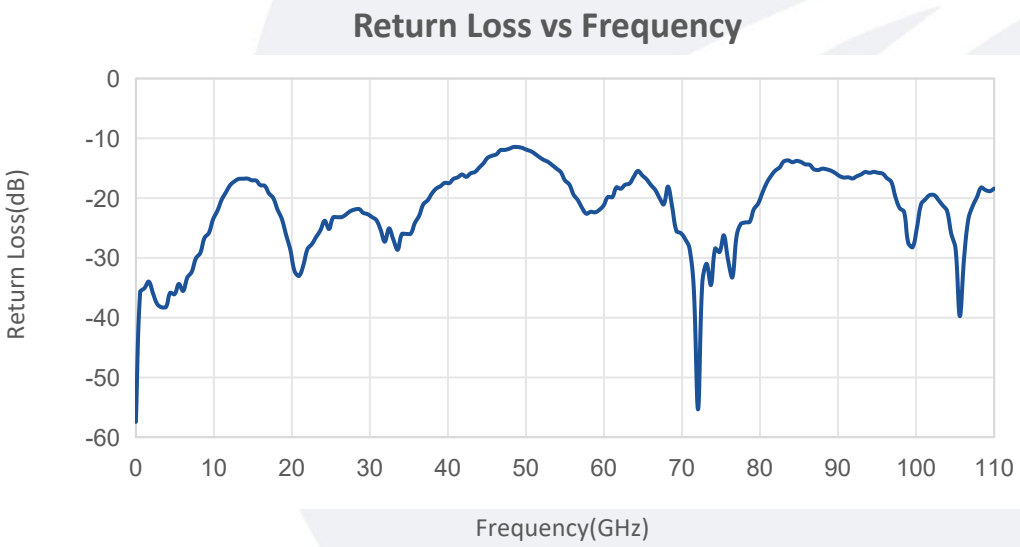



Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

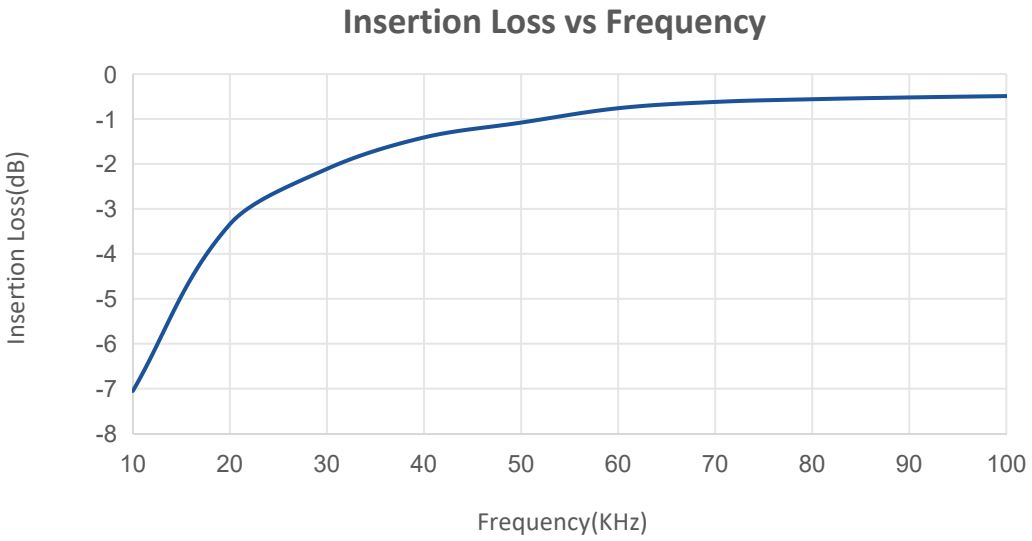

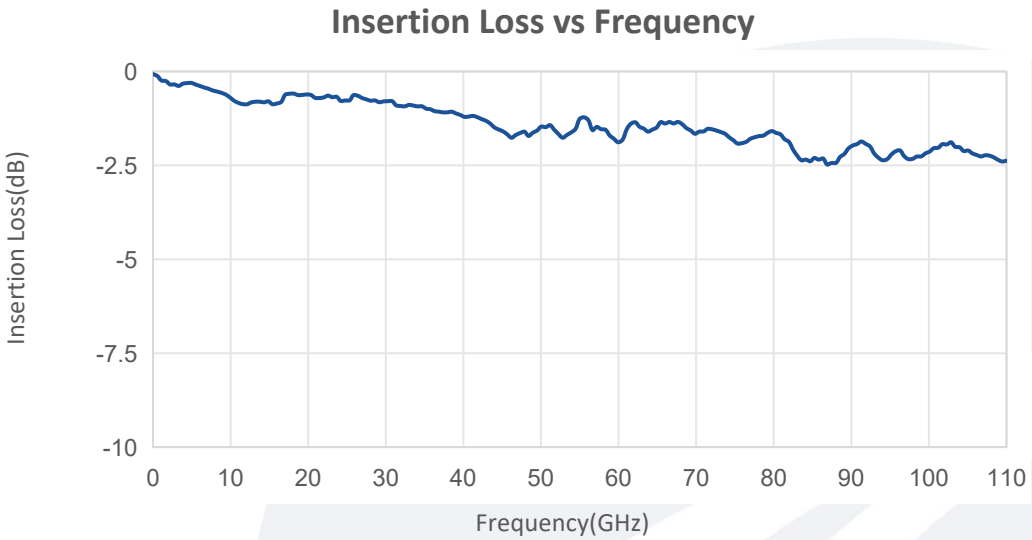

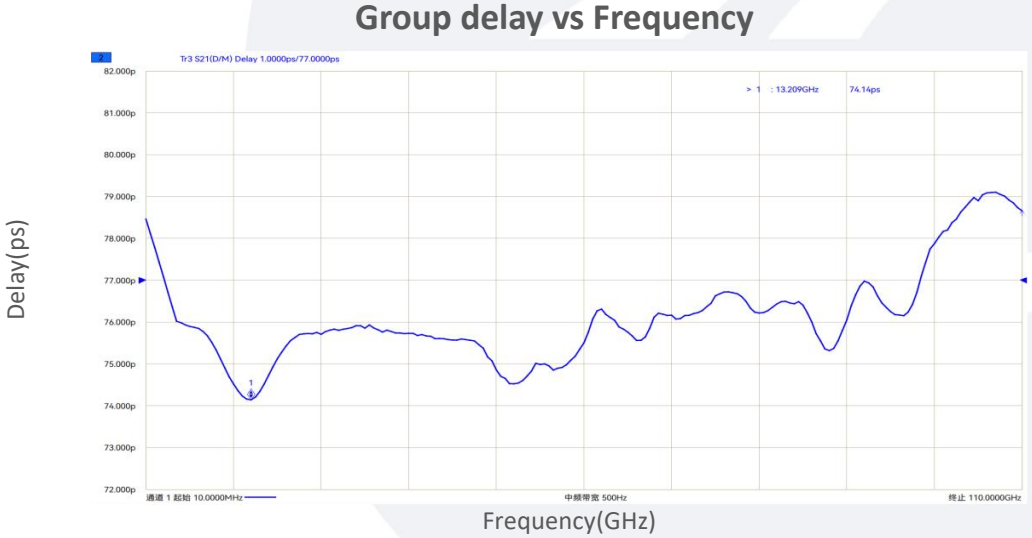

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.