

## Standard Gain Horn Antenna

### WR-42/17.6-26.7GHz/25dBi Typ, Gain

**Model: TL-42SHAK25**

TL-42SHK25 is a standard gain horn antenna that operates from 17.6 GHz to 26.7 GHz. The antenna offers 25 dBi nominal gain. The input of this antenna configuration offers coax adapter structure with 2.92mm female. The standard gain horn is offered for antenna range calibration purpose mainly, but it can be also used for general purpose system set ups.

#### Features:

- Operating Frequency 17.6 to 26.7 GHz
- Good Impedance Match

#### Applications:

- Antenna Ranges
- Antenna Gain Measurements
- System Setups

#### Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	17.6		26.7	GHz
Gain		25		dBi
Input VSWR			1.5	:1
Antenna Beamwidth	E:6~11;H:7~11			°

#### Environmental And Physical Characteristics:

Description	Parameter	Units
Material	Brass	
Finish	Silver plating	
Connectors	2.92mm Female	
Size	120*85*375	mm

Outline Drawing:

Unit:mm

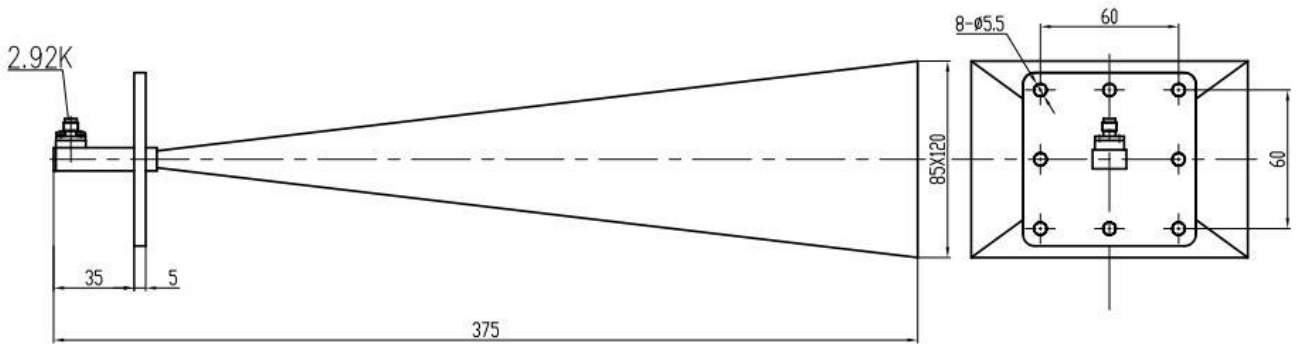


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

### Ordering Information:


Base Number	Description	Revision
TL-42SHAK25	Standard Gain Horn Antenna, 17.6-26.7GHz, Gain: 25 dBi Typ.	Rev.1.0

**Typical Performance Data:**

**VSWR vs Frequency**

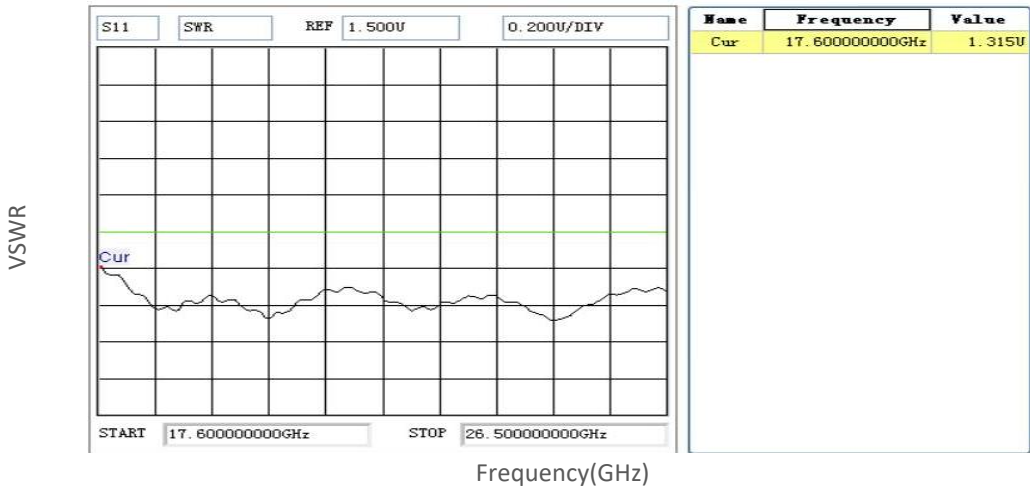


**Gain vs Frequency**

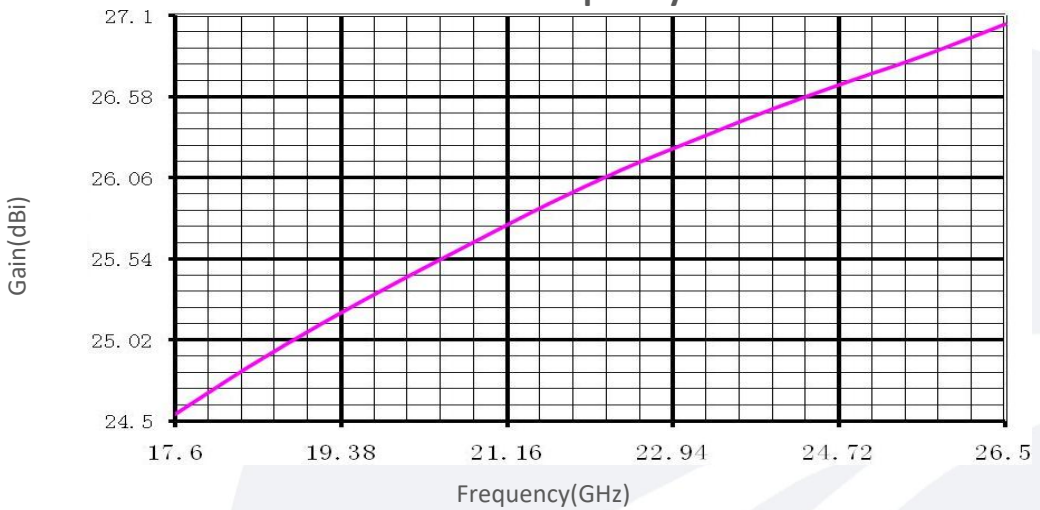

**17.6GHz:**


**Amplitude vs Theta**

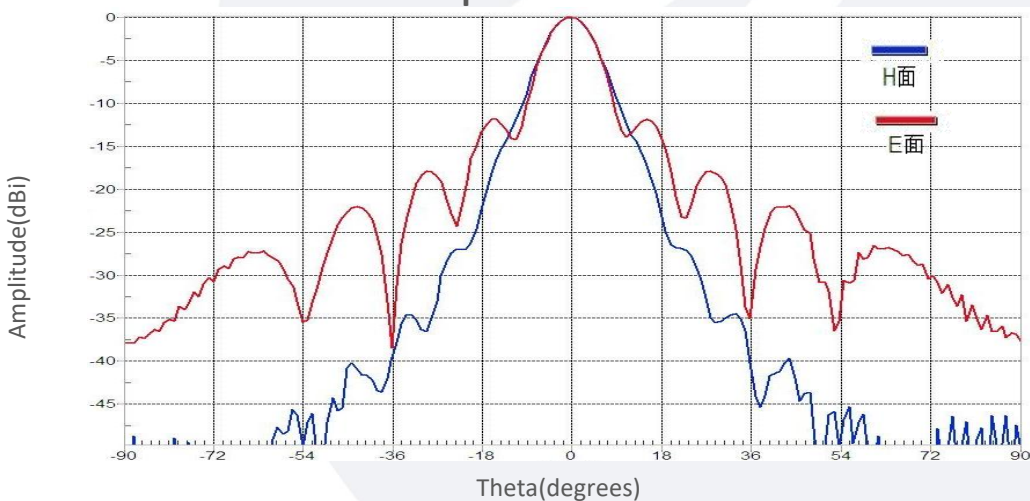


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## Typical Performance Data:

21.15GHz:

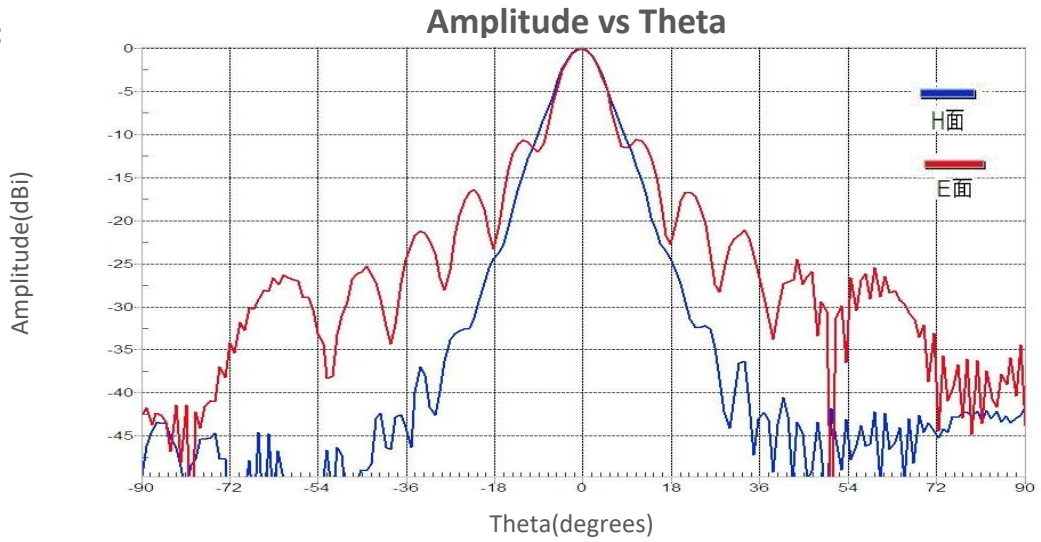

26.7GHz:

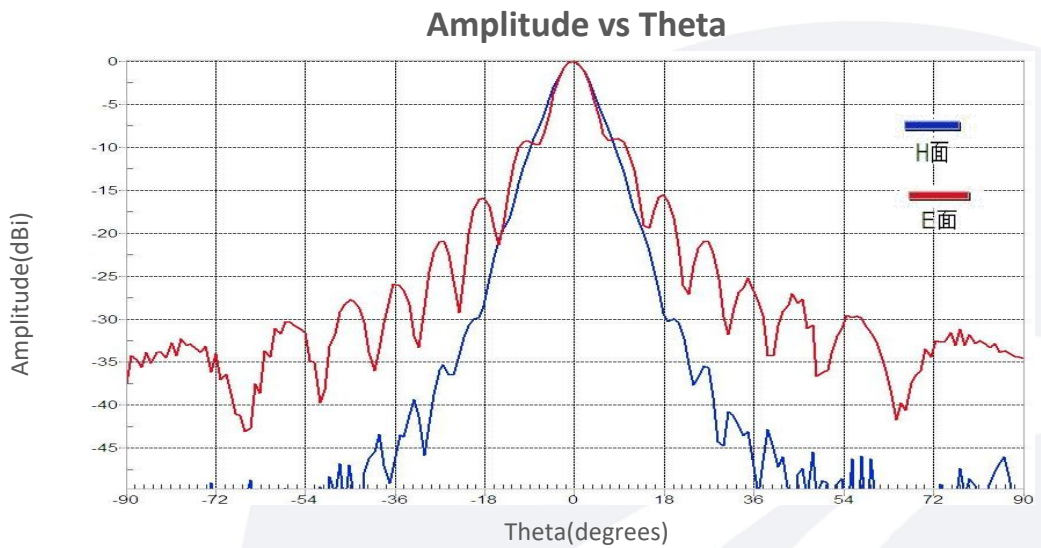

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.