

Y-Band,2-Way Waveguide Power Divider

170-260GHz/2.2dB,Insertion Loss/17dB,Isolation

Model: TLPD-170260-2-4.3

The TLPD-170260-2-4.3 is a full band WR-4.3, 2-way power divider that operates from 170 to 260 GHz. The power divider offers a typical insertion loss of 2.2dB and typical isolation of 17 dB. All ports are well-balanced and in-phase for power dividing or combining applications across the band. The power divider is configured as an inline package with WR-4.3 waveguides and UG-387/U-M compatible anti-cocking flanges at all ports .

Features:

- Frequency range: 170-260GHz
- Low Insertion Loss
- High Isolation
- Compact Package

Applications:

- Test Lab
- Sub-assemblies
- Test Instrumentations
- Twist Compatible

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency range	170		260	GHz
Insertion Loss		2.2		dB
Amplitude Balance		±1		dB
Port Isolation		17		dB
Input Return Loss		-15		dB
Output Return Loss		-15		dB

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	WR-4.3/UG-387/U	
Size	20*25*40	mm
Material	Brass	
Finish	Gold plated	

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

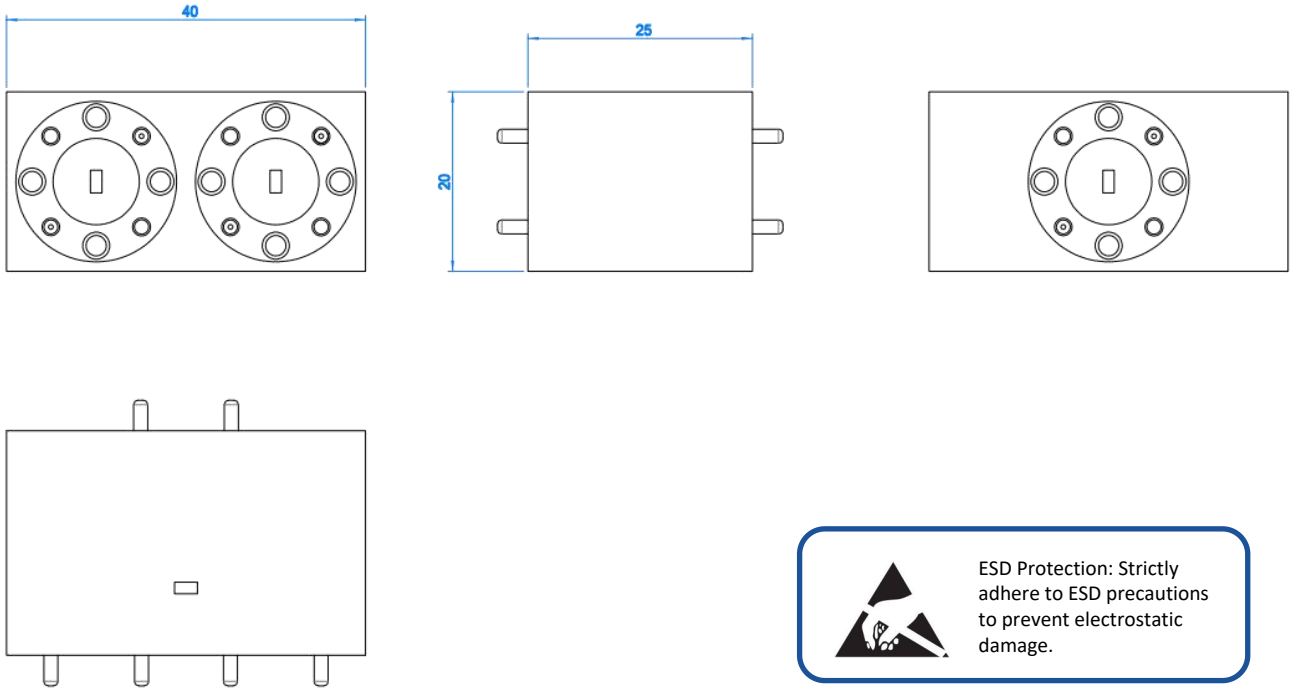

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLPD-170260-2-4.3	2-Way waveguide power divider, 170-260GHz, Insertion loss: 2.2dB, Port Isolation: 17dB	Rev.1.0