

Waveguide Bandpass Filter

WR-12/56-83GHz

Model: TLBF-5683-20

TLBF-5683-20 is a waveguide bandpass filter with a passband frequency from 56 to 83 GHz and a rejection frequency from DC to 46GHz & 87 to 114GHz. The nominal insertion loss of the filter is 2.0 dB and the typical rejection is 60 dB.

Features:

- Passband Frequency Range 56 to 83 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

Electrical Characteristics:



Parameter		Min	Typ	Max	Units
Passband Frequency range		56		83	GHz
Passband Width			27		GHz
Ruturn Loss			-18	-15	dB
Passband Insertion Loss			1	2	dB
Rejection	@46-54GHz	20			dBc
	@85-87GHz	20			
	@DC-46GHz	60			
	@87-114GHz	60			

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Storage Temerature	-40 to +70	°C
Material	Aluminium	
Finish	Conductive oxidation	
Waveguide	WR-12/UG-387/U-M	
Length	38.1	mm

Outline Drawing:

Unit:mm

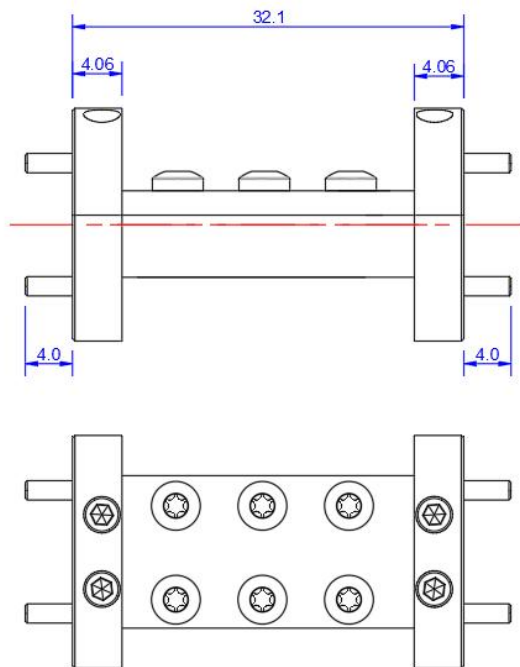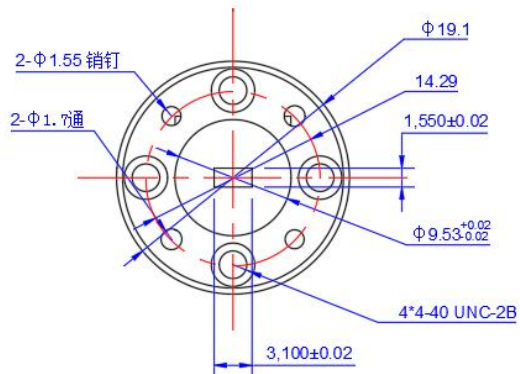

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-5683-20	Waveguide Bandpass Filter,56-83GHz,Insertion Loss:1.0dB, Rejection:60dB@DC-46GHz & 87-114GHz,WR-12/UG-387/U-M	Rev.1.1