

Waveguide Band Pass Filter

WR-10/91-99GHz

Model: TLBF-091099-30

Features:

- Passband Frequency Range 91 to 99GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies


Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Passband Frequency range		91		99	GHz
Passband Insertion Loss			1		dB
Rejection	@87GHz		-30		dBc
	@106GHz		-30		
Approximate 3dB Bandwidth		90		101	GHz

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +85	°C
Storage Temerature	-40 to +85	°C
Material	Copper	
Finish	Gold Plated	
Waveguide	WR-10/UG-387/U-M	


Outline Drawing: Unit:mm

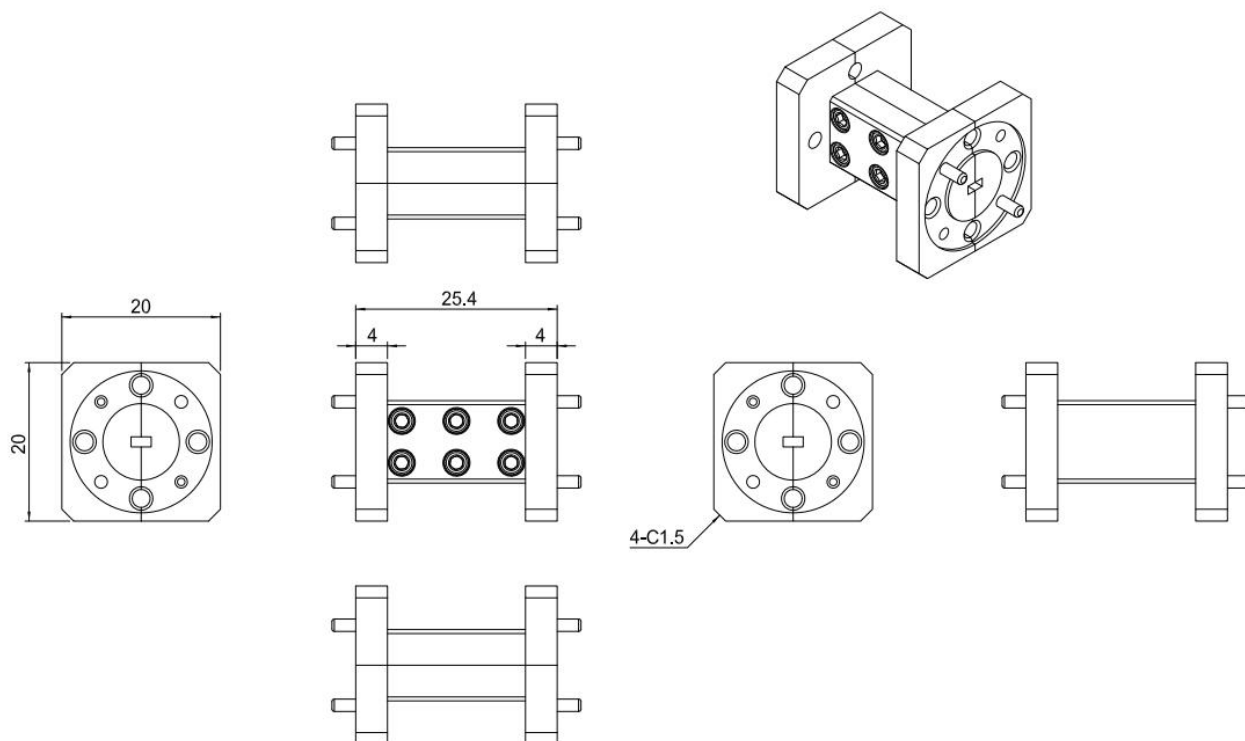

Ordering Information:

Base Number	Desciption	Revision
TLBF-091099-30	Waveguide Band Pass Filter,91-99GHz,Insertion Loss:1.0dB, Rejection:-30dBc@87GHz&106GHz,WR-10/UG-387/U-M	Rev.1.1

Typical Performance Data:

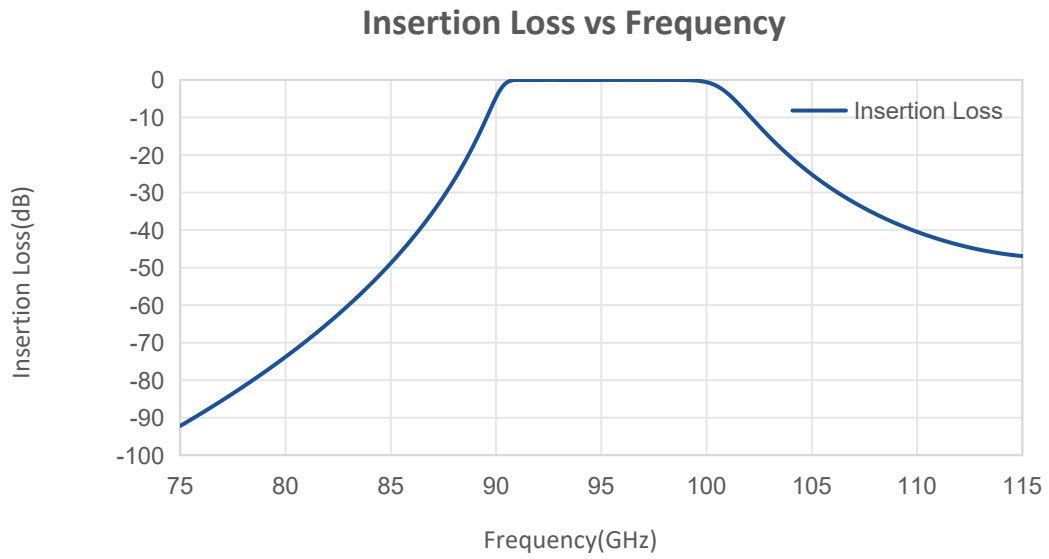

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.