

Power Source Specification

13.5-14.8GHz/57dBm Psat

Model: TLS13.5G14.8G-57-57-BC

TLS13.5G14.8G-57-57-BC is a power source specification with a minimum Psat of 57 dBm across the frequency range of 13.5 to 14.8 GHz. The power source specification features a built-in 380V or 220V power supply, making it easy to use in most lab environments. The RF output port is WR62.

Features:

- Frequency point: 13.5-14.8GHzHz
- Output Power Psat: 57dBm Min
- Protection:Over TEM,over voltage, under voltage ,load VSWR protection
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Frequency range		13.5		14.8	GHz
Frequency error			±50		ppm
Working Mode		CW/PULSE compatible			
Reference Signal		Internal Reference			
Output Psat		57			dBm
Pout Flatness	@40MHz		±0.3		dB
	@500MHz		±1.5		
Power Stability@24h				±0.1	dB
ALC Range		20			dB
ALC Step	@1~10W range		0.5		W
	@10~50W range		1		
	@50~300W range		2.5		
	@300~500W range		5		
Spurious Sppression@Pout=57dBm		60			dBc

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Output VSWR			1.5	:1
AC Voltage		220 or 380		V AC
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Frequency Synthesizer Output Connector	SMA Female	
PA Adjustment Connector	SMA Female	
RF Output Connector	WR62	
Forward/Reverse Coupling	SMA Female/SMA Female	
M&C connectors	Serial:DB9 Ethernet: RJ-45	
Power Supply Connector	Y50DX-1405	
Liquid Interfaces	ZFS-08	
Size	19 Inch 6U*550 depth	mm
Weight	≤50	Kg


*Note:The frequency synthesizer output connector and the PA adjustment connector are connected in the factory state

Key Features:

Parameter	Advantages
Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Over VSWR
Display functions	1, Output/reflected power 2, Fault informations
Remote control	RS422/Ethernet
Cooling system	Built in Cooling system,forced liquid cooling

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

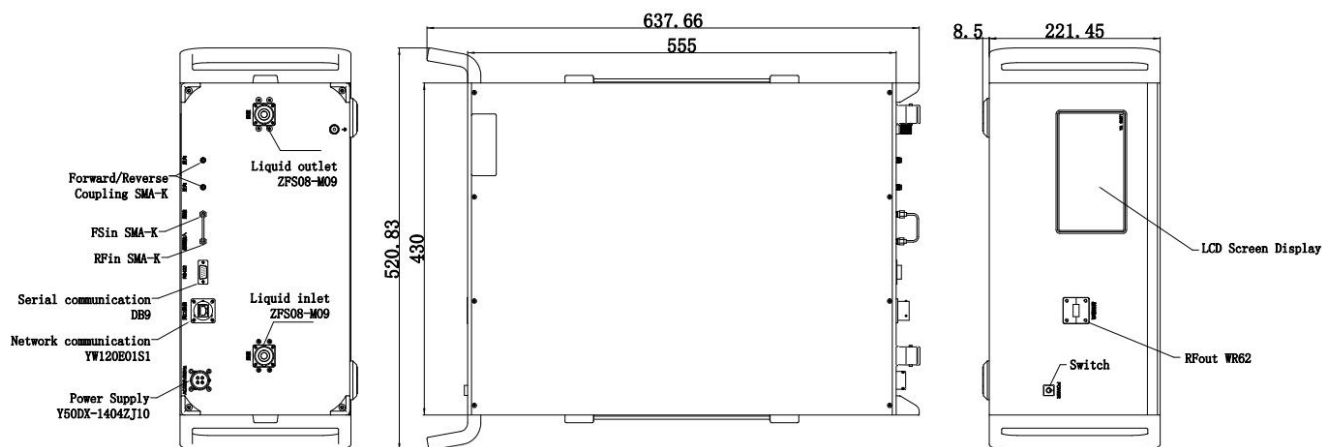

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	3,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:


Base Number	Description	Revision
TLS13.5G14.8G-57-57-BC	Power Source Specification, 13.5-14.8GHz, Psat:57dBm, 220 or 380V AC,Built in liquid Cooling	Rev.1.0

Typical Performance Data:

Small Signal Gain vs Frequency

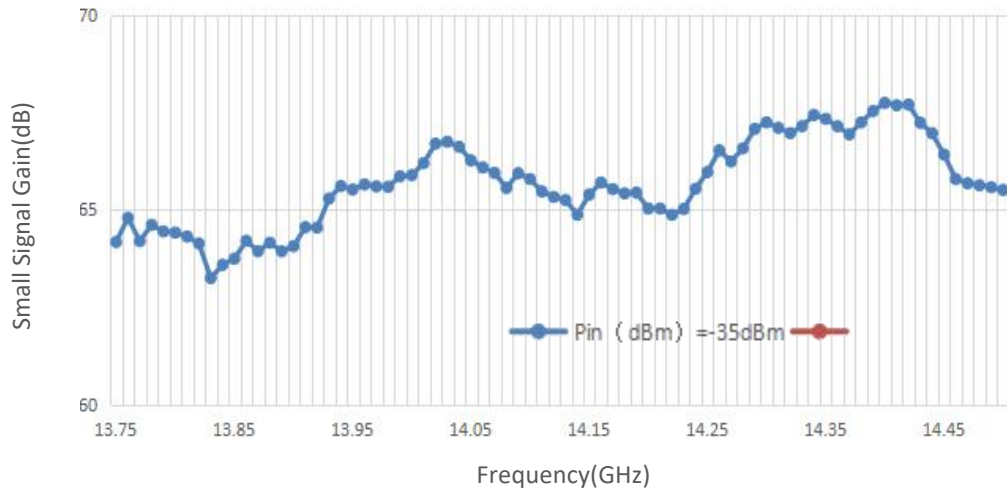

Input VSWR vs Frequency

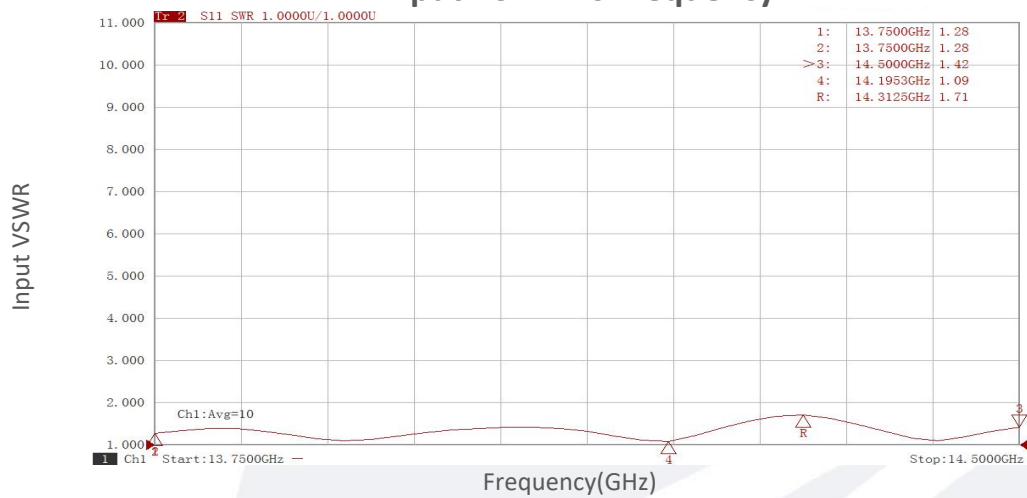


Output VSWR vs Frequency




Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


P1dB vs Frequency

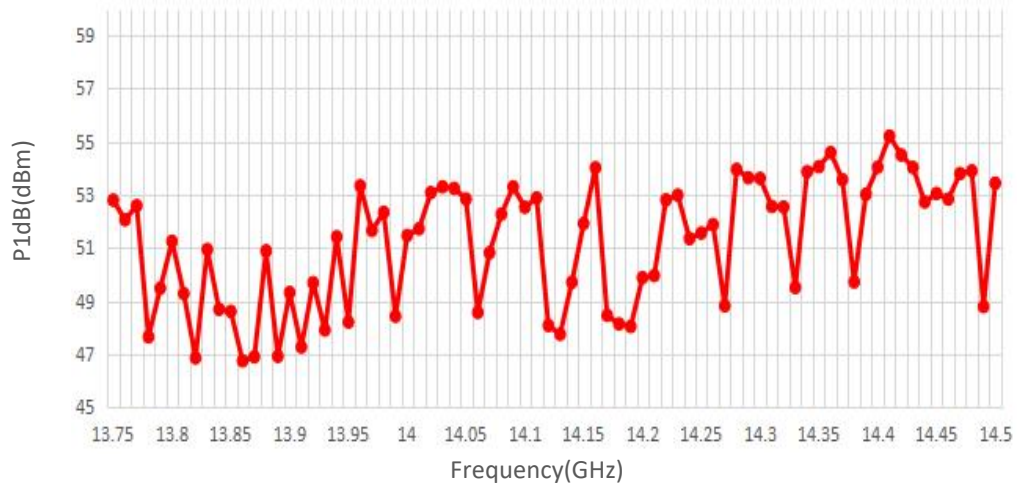

Pin@@Equal_Pout

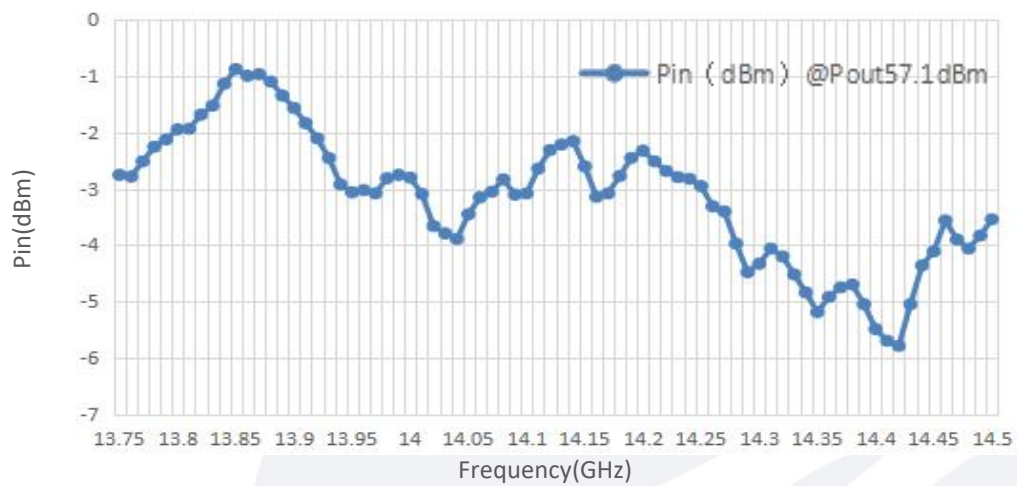


Pout@Equal_Pin

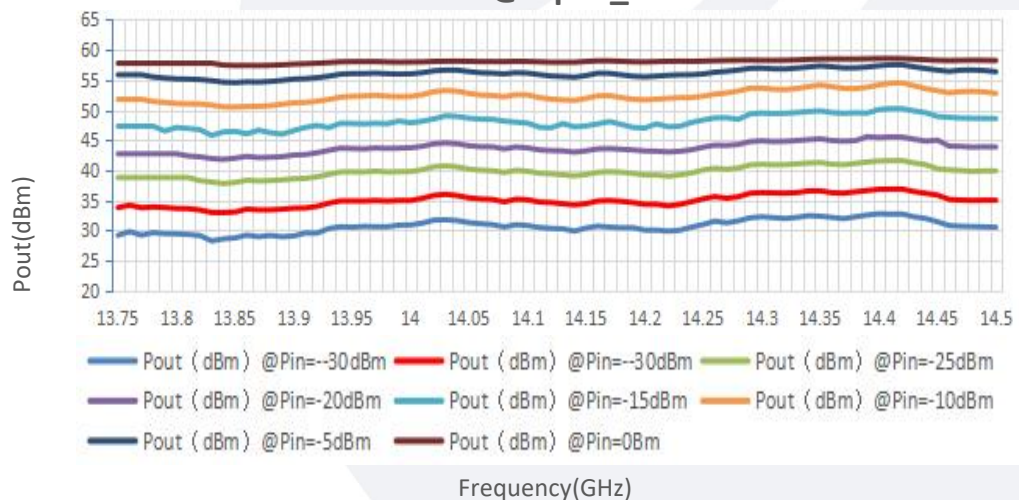


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Pout@Pin

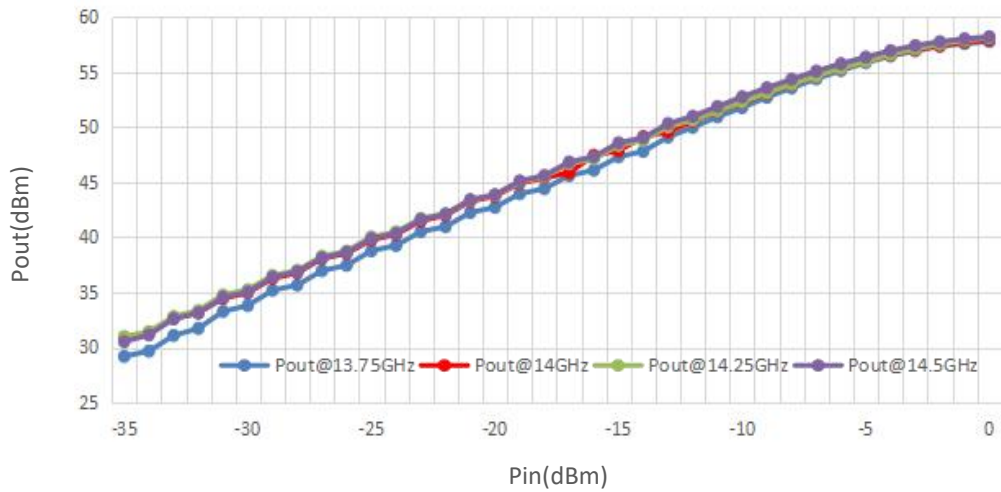

Spurious vs Frequency

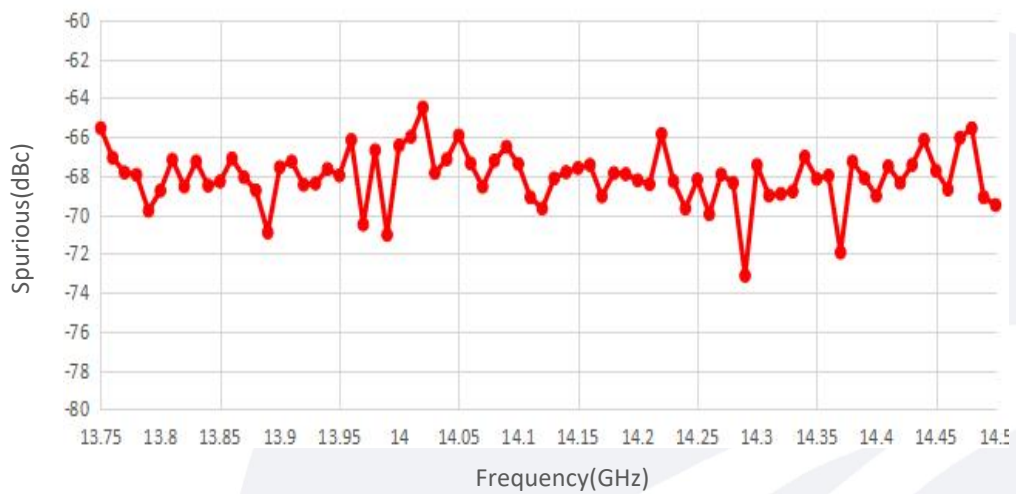



Harmonics vs Frequency

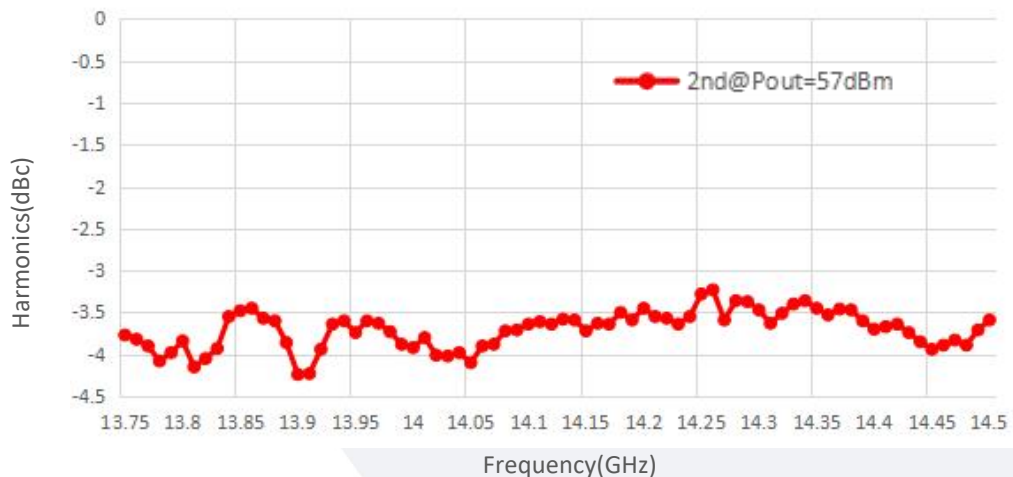

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Pout Stability@24h

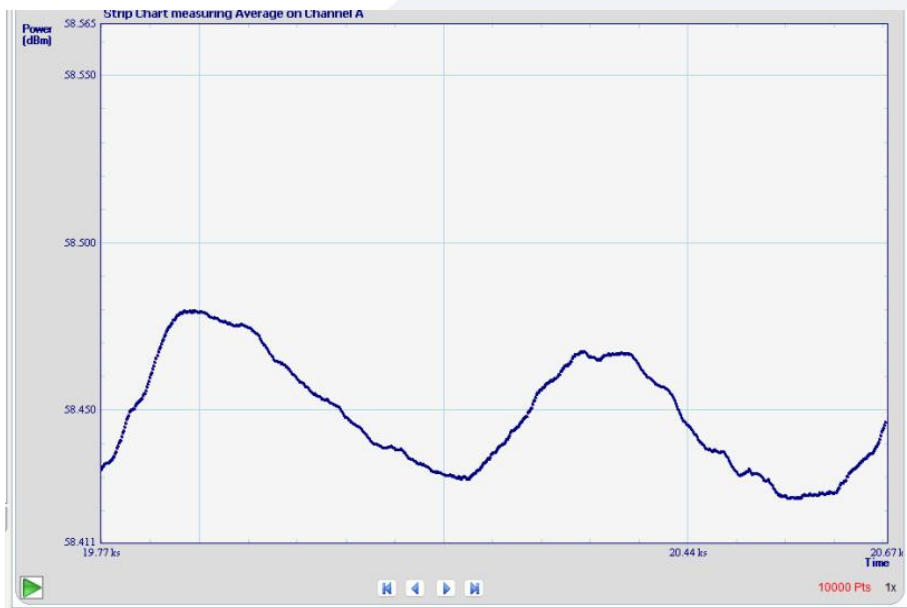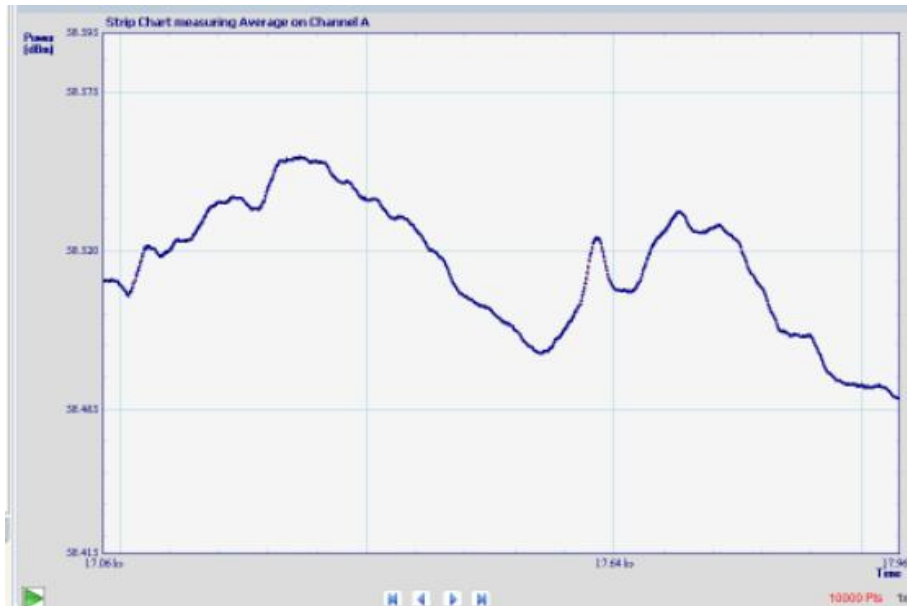


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


13.75GHz:

Pout@PRF=1KHz, Duty cycle=10%

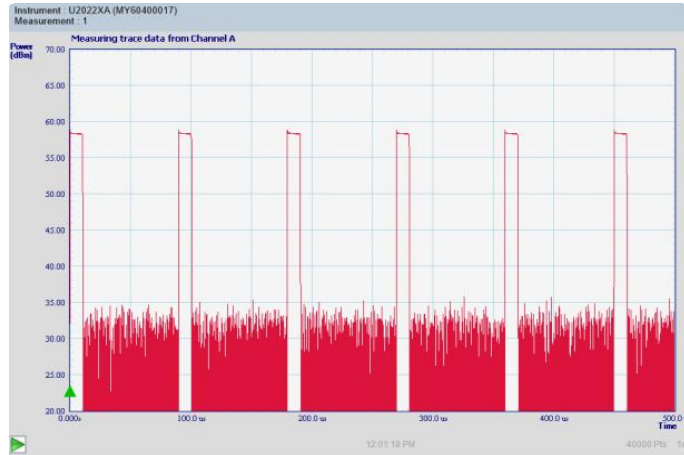


14GHz:

Pout@PRF=1KHz, Duty cycle=10%

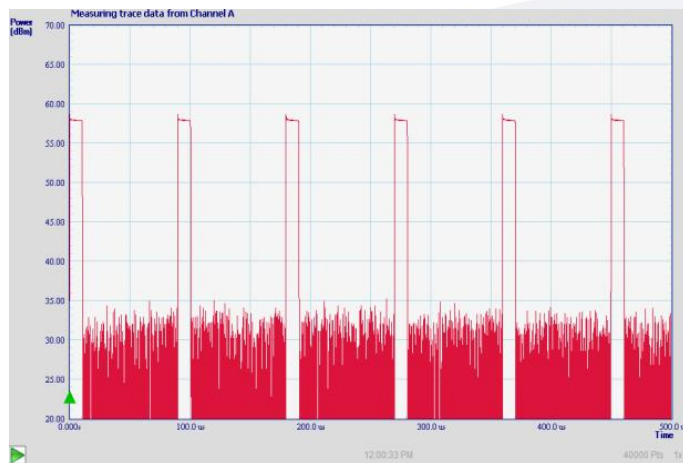

14.5GHz:

Pout@PRF=1KHz, Duty cycle=10%

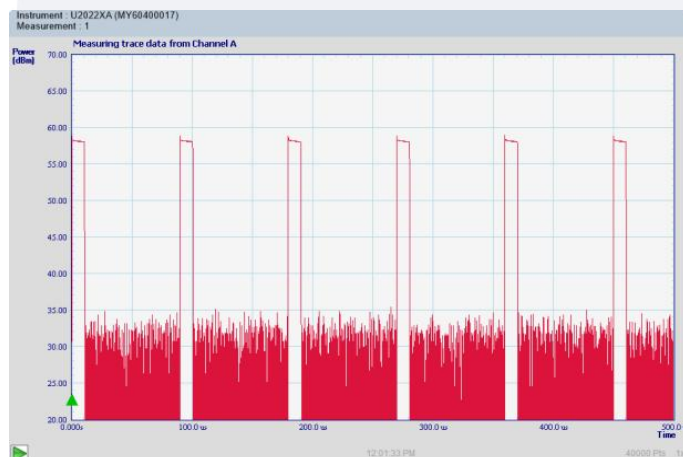

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.