Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

# Waveguide Bandpass Filter

## WR-12/73-83GHz

## Model: TLBF-073083-40-12

TLBF-073083-40-12 is a waveguide bandpass filter with a passband frequency from 73 to 83 GHz and a rejection frequency from DC to 69 GHz and 87 to 90 GHz. The maximum insertion loss of the filter is 2 dB and the minimum rejection is 40 dBc. The input and output port configuration offers an inline structure with WR-12 waveguides and UG-387/U-M anti-cocking flanges.

## Features:

- Passband Frequency Range 73 to 83 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

## Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

## Electrical Characteristics:

| Parameter | | Min | Typ | Max | Units |
|---|---|---|---|---|---|
| Passband Frequency range | | 73 | | 83 | GHz |
| Passband Width | | | 10 | | GHz |
| Input/Output VSWR | | | 1.25 | | :1 |
| Passband Insertion Loss | | | | 2 | dB |
| Rejection | @DC-69 GHz | 40 | | | dBc |
| | @87-90 GHz | 40 | | | |


## Envrionmental And Physical Characteristics:

| Parameter | Description | Units |
|---|---|---|
| Operating Temerature | -20 to +55 | ℃ |
| Storage Temerature | -20 to +55 | ℃ |
| Material | Aluminum | |
| Finish | Conductive Coating, Natural Finish | |
| Waveguide | WR-12/UG-387/U-M | |

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

## Outline Drawing:

Unit:mm; Tolerance:±0.1mm

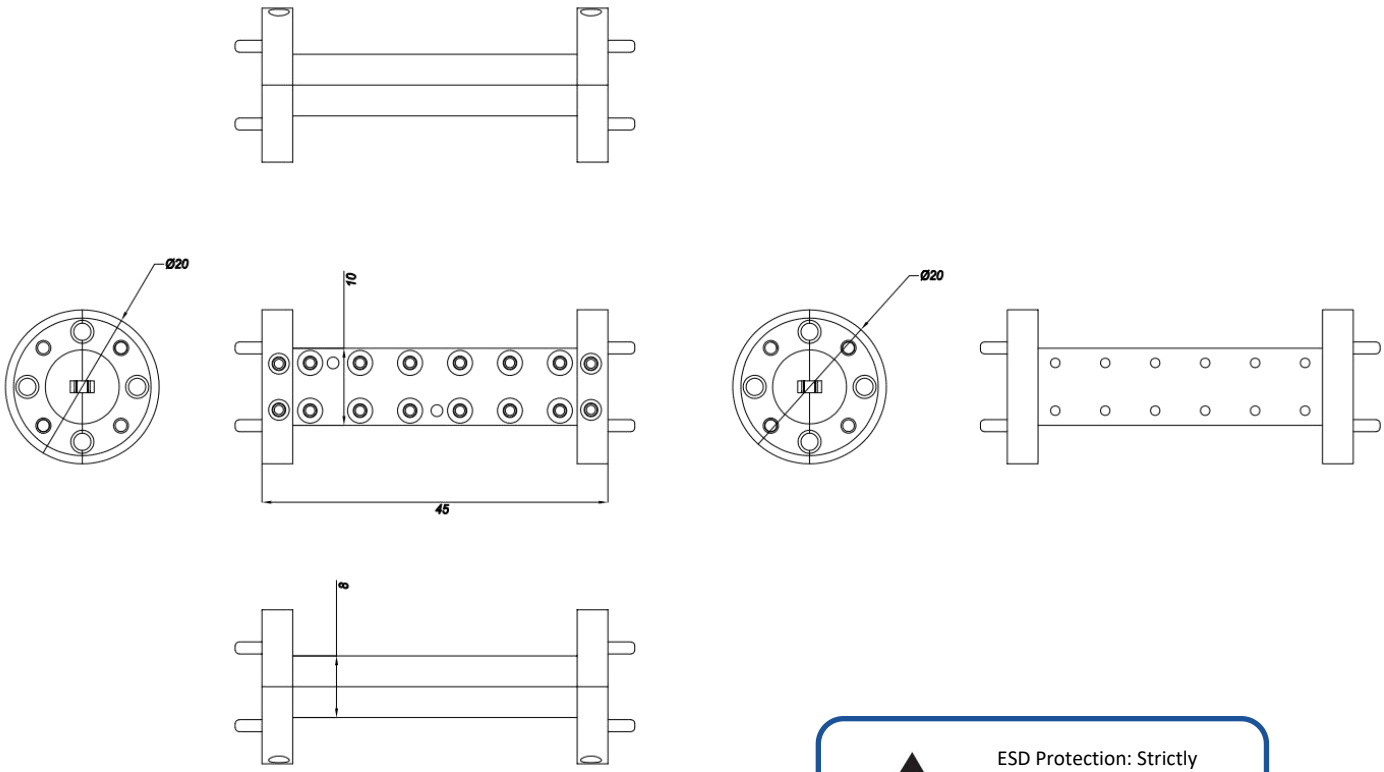


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## Ordering Information:

| Base Number | Description | Revision |
|---|---|---|
| TLBF-073083-40-12 | Waveguide Bandpass Filter,66-71GHz, Insertion Loss: 2dB, Rejection: 40dBc@DC-69GHz&87-90GHz,WR-12/UG-387/U-M | Rev.1.0 |