

Waveguide to Coax Adapter, Right Angle

WR-22/1.85mm Female/33-50GHz

Model: TL-22WCA1.85R

The TL-22WCA1.85R is right angle waveguide to coax adapters that cover the frequency range of 33 to 50GHz. It is designed for an efficient transition between the rectangular waveguide and 1.85 mm coax connector.

Features:

- Operating Frequency 33 to 50GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies



Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	33		50	GHz
Insertion Loss		0.5	0.8	dB
VSWR		1.2		:1
Power Handling			10	W

Envrionmental And Physical Characteristics:

Parameter	Description	Units
Operating Temperature	-40 To +85	°C
Storage Temperature	-40 to +85	°C
Material	Aluminum	
Finish	Gold Plated	
Coax Connector	1.85mm Female	
Waveguide	WR-22/UG-383/U-M	

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

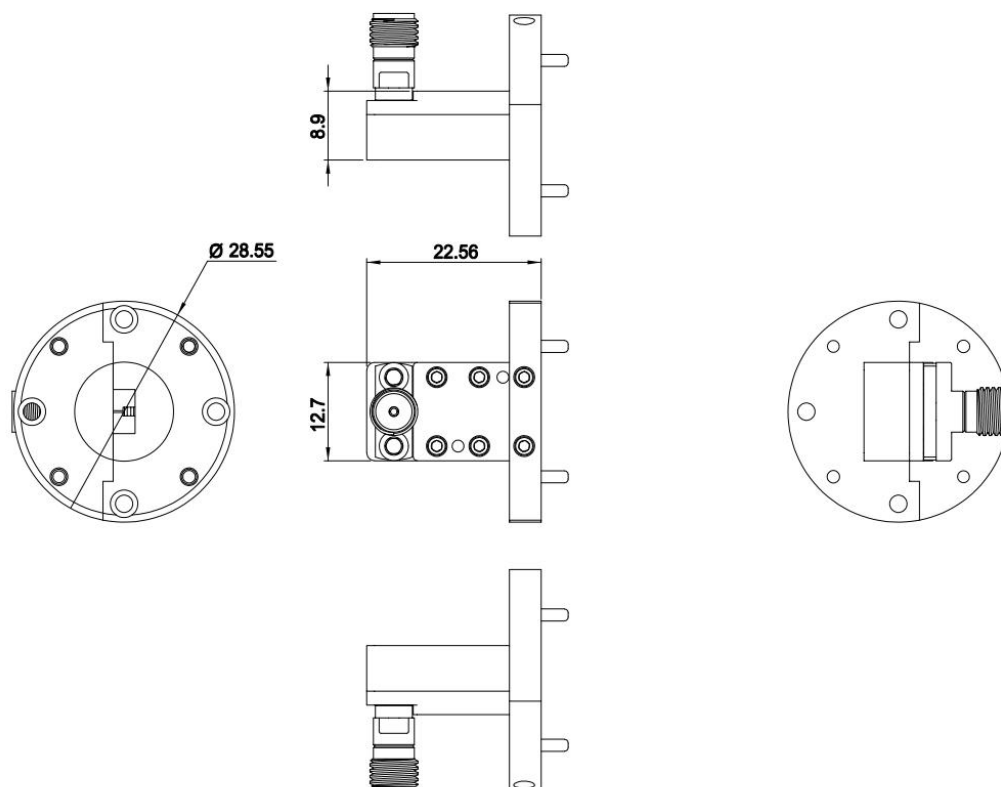


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:


Base Number	Description	Revision
TL-22WCA1.85R	Waveguide to Coax Adapter, Right Angle WR-22/1.85mm Female,33-50GHz	Rev.1.0

Typical Performance Data(Tested back-to-back):

VSWR vs Frequency

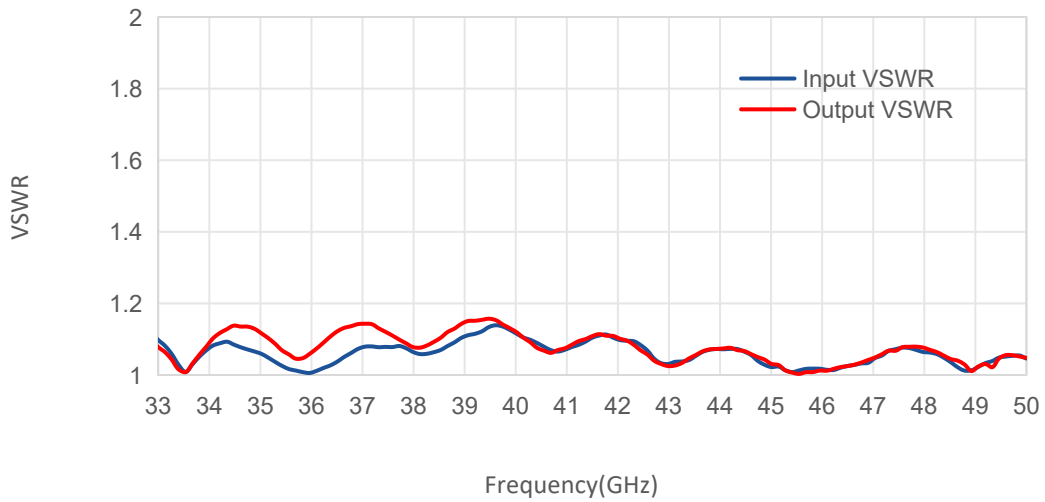

Insertion Loss vs Frequency

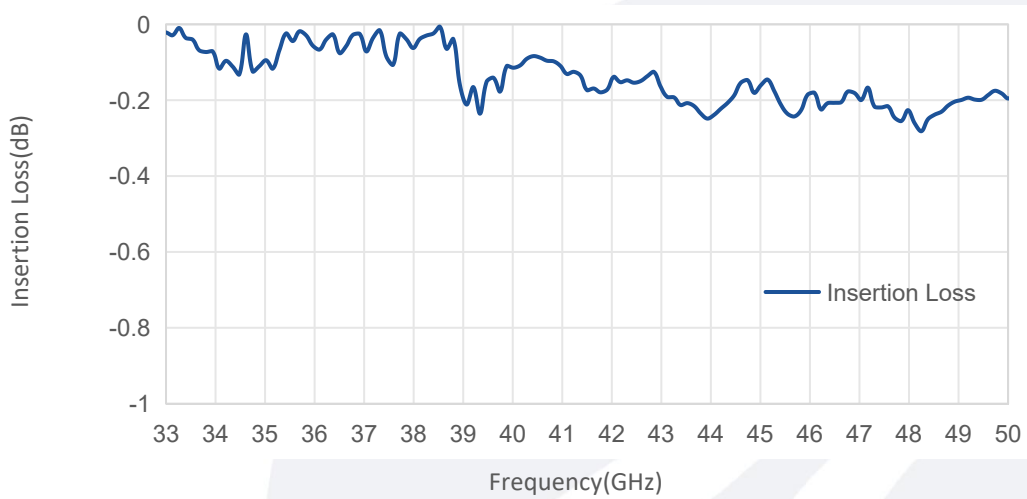

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.