

Straight Waveguide

WR-10/75-110 GHz

Model: TL-10SWG-300mm

Features:

- Operating Frequency 75 to 110 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

Applications:

- Test Instrumentation
- Instrumentations
- Lab Use

Electrical Characteristics:





Parameter	Min	Typ	Max	Units
Frequency Range	75		110	GHz
Insertion Loss			0.4	dB
VAWR			1.2	:1

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Material	Copper	
Finish	Gold plated	
Connectors	WR10	
Length	300	mm

Outline Drawing:

Unit:mm

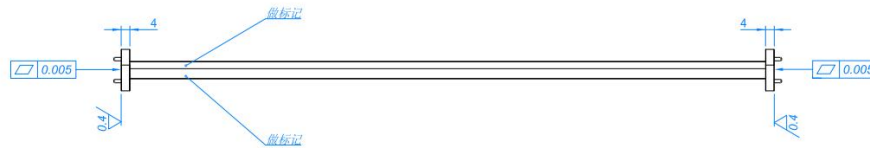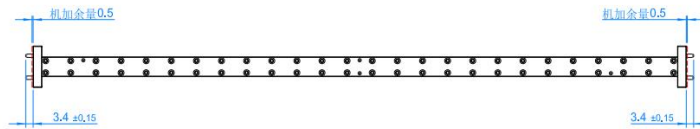

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.