

Straight Waveguide

WR-15/49.8-75.8 GHz

Model: TL-15SWG-2inch

Features:

- Operating Frequency 49.8 to 75.8 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

Applications:

- Test Instrumentation
- Instrumentations
- Lab Use

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	49.8		75.8	GHz
VAWR			1.15	:1

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Material	Copper	
Internal Coating	Silver plated	
External Coating	Spray sea grey paint	
Connectors	WR15	
Flange	FUGP620	
Length	50.8	mm

Outline Drawing:

Unit:mm

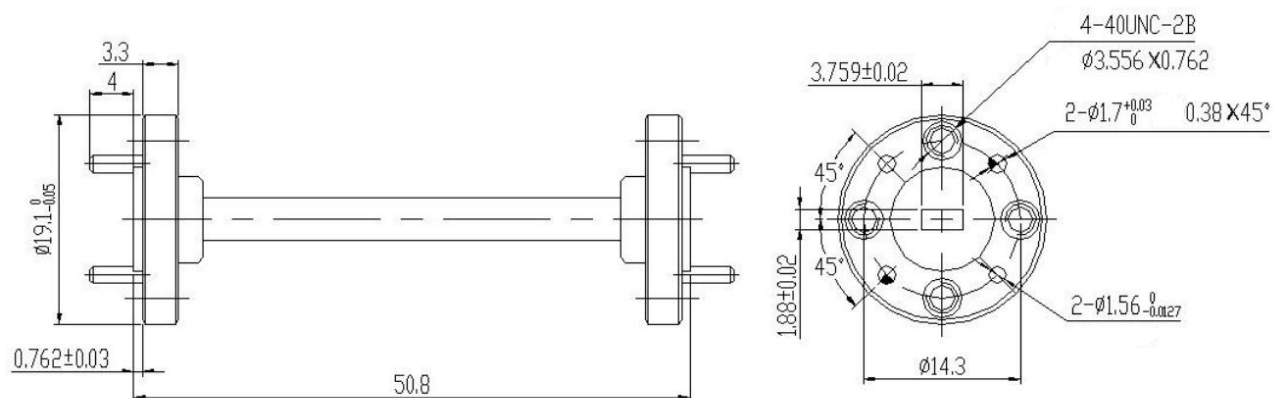

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.