

Straight Waveguide

WR-28/26.3-40 GHz

Model: TL-28SWG50mm-FBE

Features:

- Operating Frequency 26.3 to 40GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

Applications:

- Test Instrumentation
- Instrumentations
- Lab Use

Electrical Characteristics:



Parameter	Min	Typ	Max	Units
Frequency Range	26.3		40	GHz
VSWR			1.1	:1

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Material	Copper	
Finish	Silver plated,Spray sea grey paint	
Connectors	WR28	
Flange	FBE320	
Length	50	mm

Outline Drawing:

Unit:mm

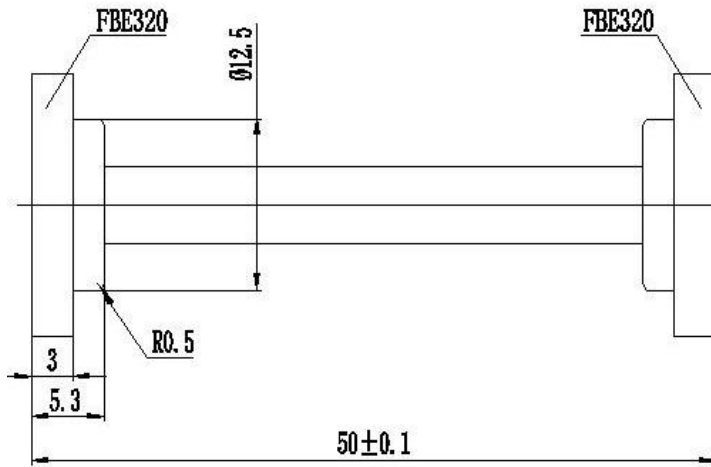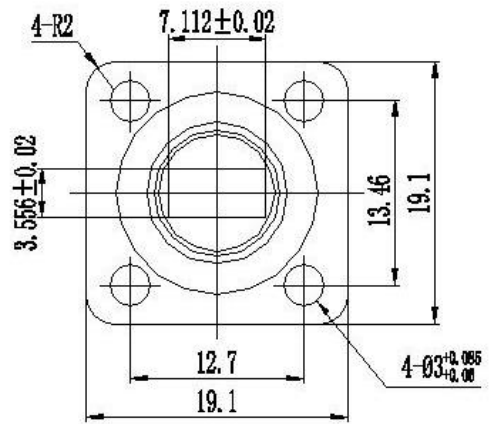

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.