泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coaxial Circulator

SMA Female/50W

Model: TLC6G18G-D50W

The TLC6G18G-D50W is a coaxial circulator designed to operate from 6GHz to 18GHz. The coaxial circulator offers minimum 14 dB isolation and 1.5:1 maximum VSWR. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Operating Frequency 6 to 18GHz
- Low Insertion Loss
- Moderate Isolation
- Compact Configuration

Applications:

- Port Isolation
- Module Integration

Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Frequency Range		6		18	GHz
Insertion Loss@25℃	1→2			1.7	dB
	2→3			0.85	
Insertion Loss @-10~+70℃	1→2			1.9	dB
	2→3			0.95	
Isolation@25℃	2→1	28			dB
	3→2	14			
Isolation @-10~+70℃	2→1	26			dB
	3→2	12			
VSWR@25℃				1.5	:1
VSWR@-10~+70℃				1.6	:1
Power Handling		Average: 50W			W
Reverse Power			20		W
Direction		Clockwise: 1→2→3			
Impedance		50			Ohms


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Envrionmental And Physical Characteristics:

Parameter	Value	Units
Operating Temerature	-10 To +70	℃
Connectors	SMA Female	
Size	30*23*13	mm

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

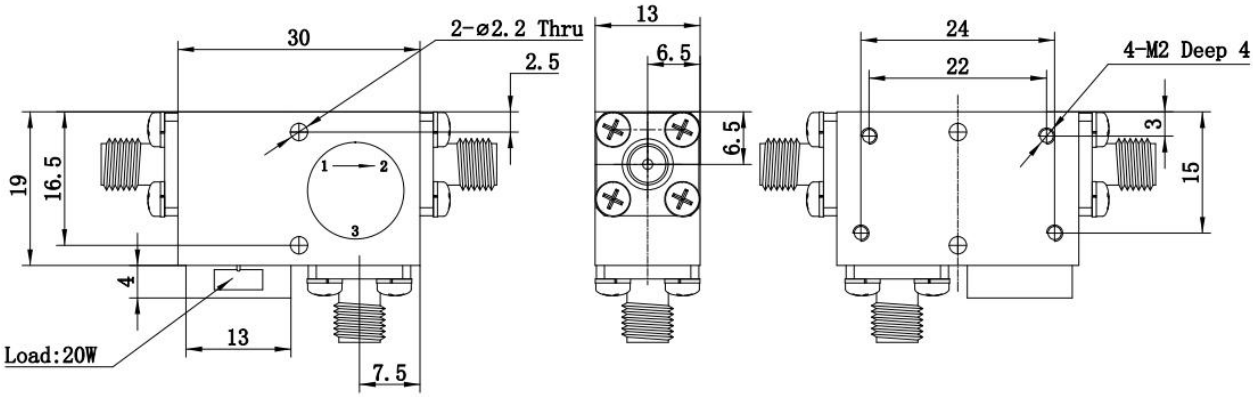

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLC6G18G-D50W	Coaxial Circulator, 6-18GHz, Insertion loss: 0.85dB, Port Isolation: 14dB	Rev.1.0