



Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~50GHz
Dielectric Withstanding Voltage	1000V
VSWR	≤1.25
Insertion Loss	≤0.35dB
Operating Temperature	- 55~+125°C

Material & Coat-Plating

Inner Conductor	BE-CU, Gold Plated
Dielectric	PEI
Body	Stainless steel, Passivation

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave, Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ± ANGLES ±1°	APVD	Product Model 2.4-JKS 2.4mm Male to 2.4mm Female adaptor			
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE 0T8L4	DRAWING NO	
		CUSTOMER DRAWING			SHEET 1 OF 1	RVE 1

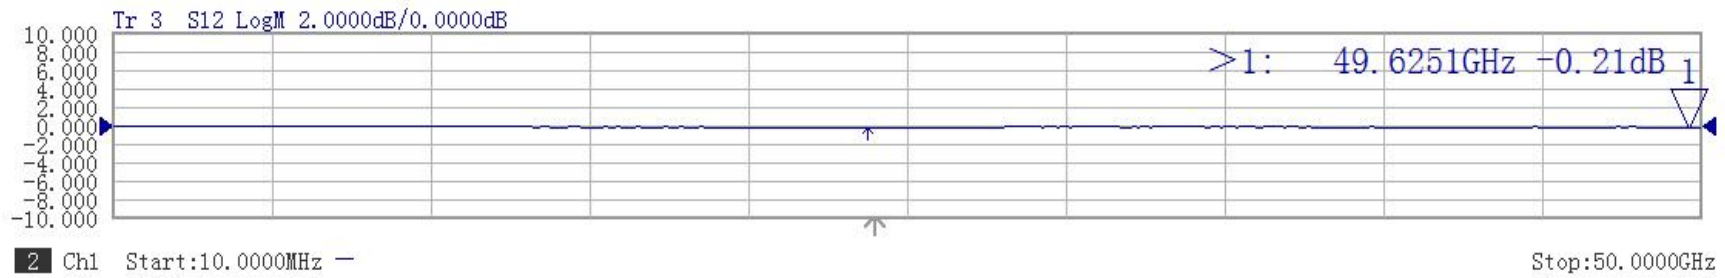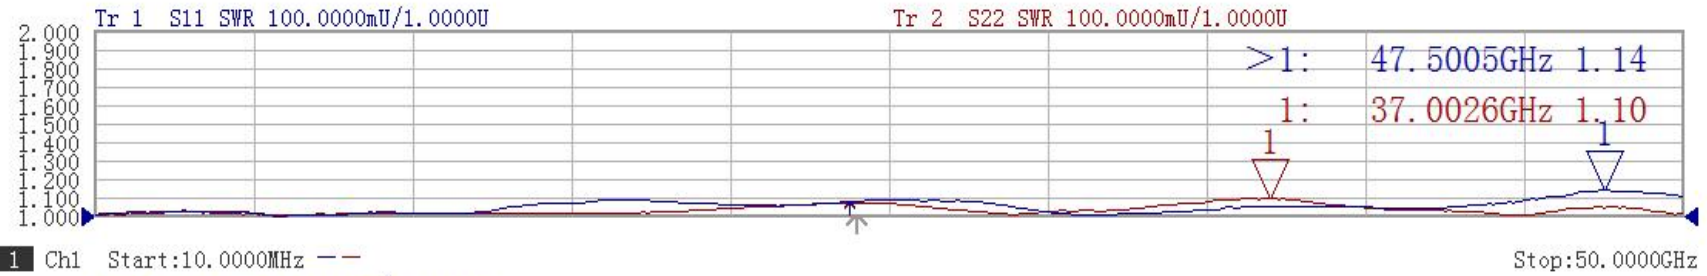

	SweepType	Start (GHz)	Stop (GHz)	Points	IF BW (Hz)	SweepTime (s)	Port1, 2Power (dBm)
Ch1	LIN_SWEEP	0.010000000	50.000000000	401	1000	1.000000	-5.00, -5.00