

## SPDT , Terminated , Coaxial Switches

R12-KF12040-DTI, Coaxial Switches , SPDT , 2.92mm , Failsafe , 12VDC , DC to 40 GHz , DSUB-9 , Terminated , Electronic Type Indicator

R12-KF24040-DTI, Coaxial Switches , SPDT , 2.92mm , Failsafe , 24VDC , DC to 40 GHz , DSUB-9 , Terminated , Electronic Type Indicator

R12-KF28040-DTI, Coaxial Switches , SPDT , 2.92mm , Failsafe , 28VDC , DC to 40 GHz , DSUB-9 , Terminated , Electronic Type Indicator

### 电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-40GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Failsafe
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	1 million min
负载功率 Termination power CW	0.5W
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	380 200 170 mA
指示灯额定值 Indicator rating	Electronic Type Indicator Max withstand voltage: 60VDC Max current capacity: 100mA Max "ON" resistance: 16Ω Note: VDCi and COM- must be connected to operate.



### 射频特性 RF Specifications:


频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18	18-26.5	26.5-32	32-40
插入损耗 INSERTION LOSS (MAX) dB	0.2	0.25	0.4	0.7	0.8	1.0
隔离度 ISOLATION (MIN) dB	70	70	60	55	50	50
电压驻波比 V.S.W.R. (MAX)	1.2:1	1.3:1	1.4:1	1.7:1	1.9:1	2.0:1

### 环境和物理特性 Environmental And Physical Characteristics:


参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard ) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	2.92mm Female
控制接口 Control connector	D-SUB 9 Pin Male
重量 Weight	88g Max
外壳颜色 Housing Color	浅蓝色 Light Blue

备注：如果客户需要其他外壳颜色，请联系业务备注

外形尺寸 Outline Drawing: Unit: mm

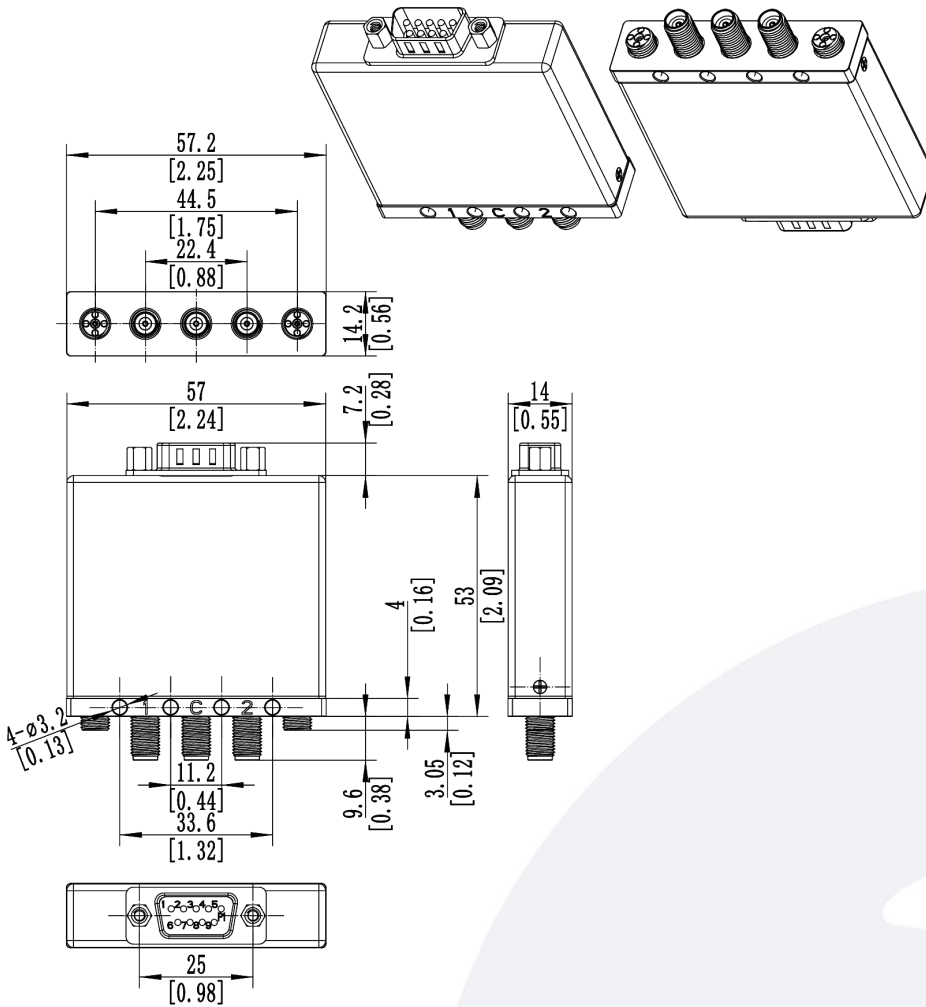


原理图 Schematic:

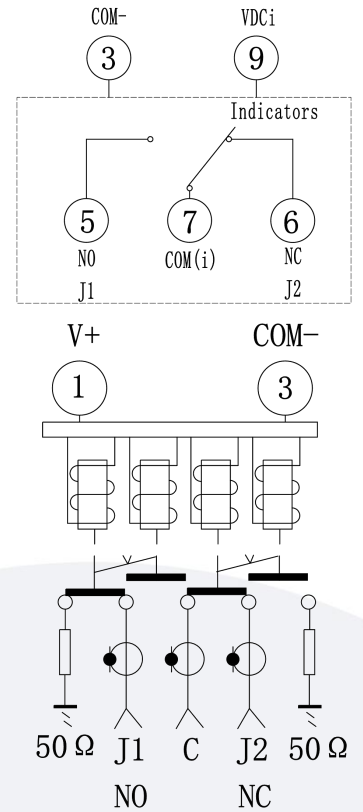


功率曲线图 Average power:

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

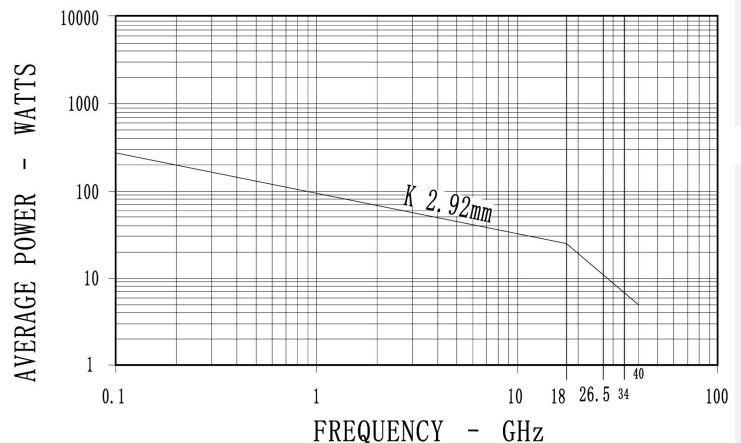

### 针脚定义 Pin Definition:

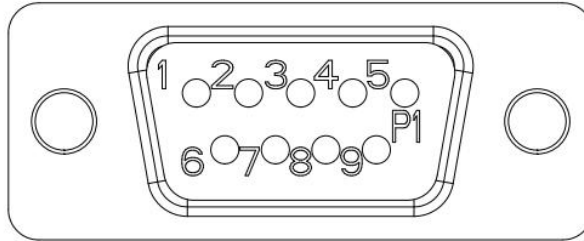


9 PIN D-SUB		RF Connect Used
Pin NO.	Function	SPDT
1	V+	NO:J1-COM
	0	NC:J2-COM
2	UNUSED	
3	COM-	
4	UNUSED	
5	1(IND.)	NO:J1-COM
6	2(IND.)	NC:J2-COM
7	COMi(IND.)(V+)	
8	UNUSED	
9	VDCi	

### 标准型号 Part Number:


标准型号 Part Number	额定电压 Rated Voltage	可选项 Option
SPDT		
R12-KF12040-DTI	12VDC	-S (S型号满足IP65) 例如: R12-KF12040-DTIS
R12-KF24040-DTI	24VDC	
R12-KF28040-DTI	28VDC	

**典型曲线 Typical Performance Data:**

INSERTION LOSS

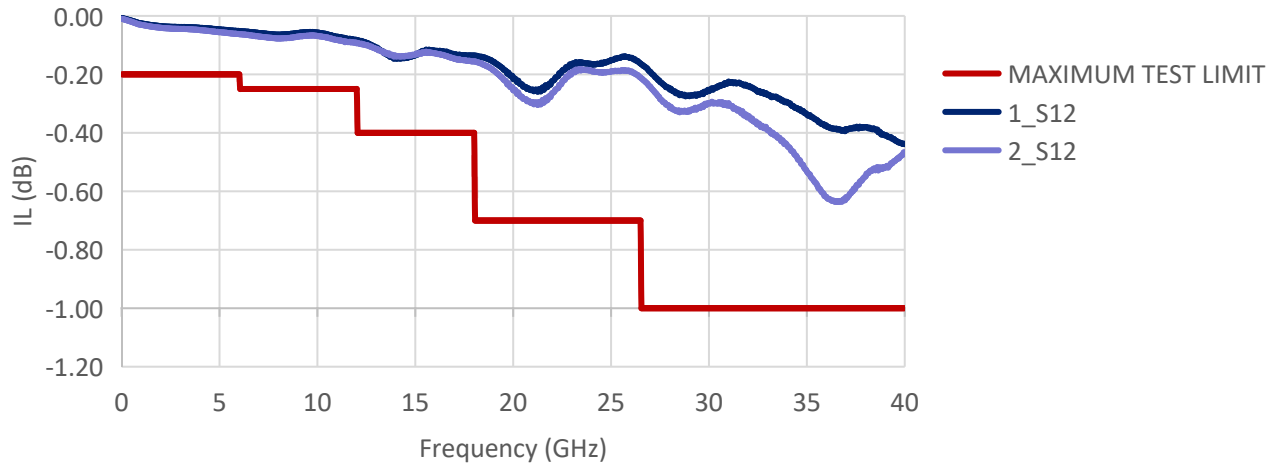

VSWR

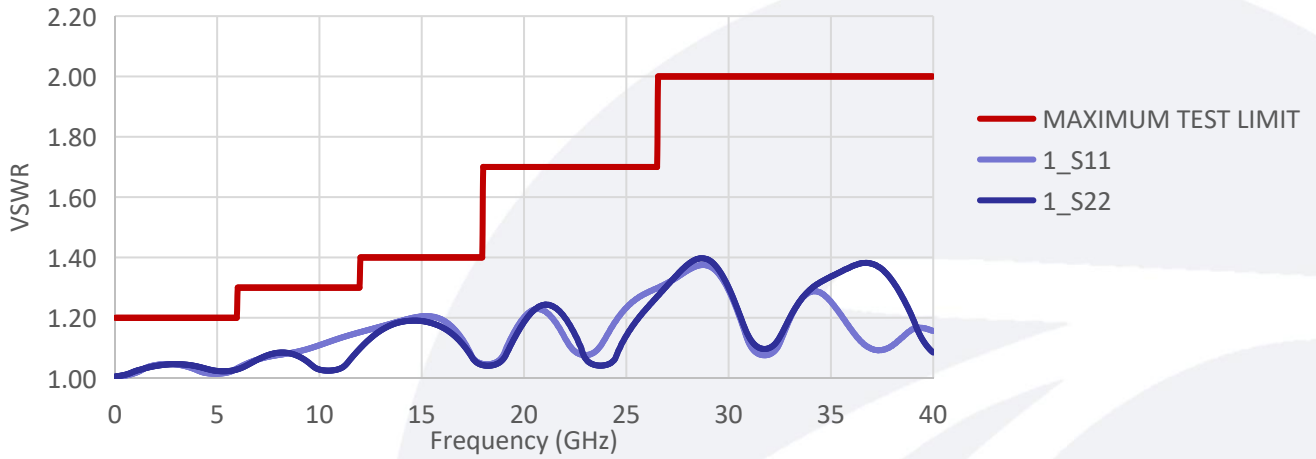

ISOLATION

