

## Coaxial Termination

### DC-6GHz/BNC Male/3W

Model:TT3-6-BNC-J

The TT3-6-BNC-J is a well-matched, 50Ω male termination enabling operation from DC to 6 GHz. This termination features a 3W power rating and 1.3:1 max VSWR.

#### Features:

- Operating Frequency DC to 6 GHz
- High Return Loss
- Instrumentation Grade

#### Applications:

- laboratory test
- Communication equipment

### 电气特性 Electrical Characteristics:


| 参数 Parameter         | Min | Typ | Max | 单位 Units |
|----------------------|-----|-----|-----|----------|
| 频率范围 Frequency Range | DC  |     | 6   | GHz      |
| 驻波 VSWR              |     |     | 1.3 | :1       |
| 耐功率 Power Handling   |     |     | 3   | W        |
| 阻抗 Impedance         |     | 50  |     | Ohms     |

### 环境和机械特性 Envriionmental And Physical Characteristics:

| 类型 Description            | 参数 Parameter        | 单位 Units |
|---------------------------|---------------------|----------|
| 操作温度 Operating Temerature | -55 To +100         | ℃        |
| 存储温度 Storage Temperature  | -55 To +100         | ℃        |
| 接口 Connectors             | BNC Male            |          |
| 材质 Weight:                | Nickel plated Brass |          |

外形图 Outline Drawing:

Unit:mm

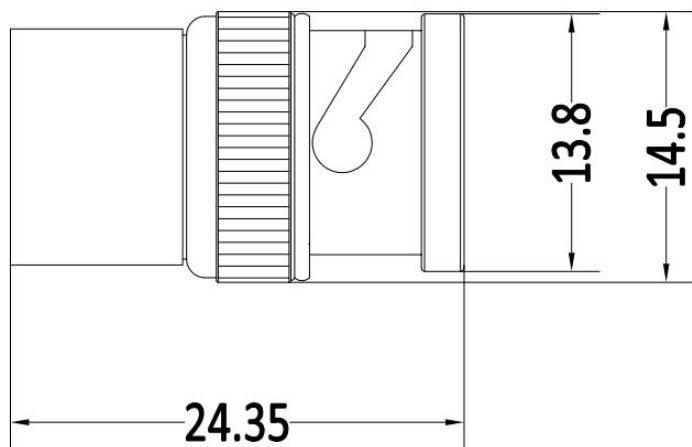

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description                          |
|------------------|-----------------------------------------|
| TT3-6-BNC-J      | DC-6GHz,3W,BNC male Coaxial Termination |