

## Power Amplifier

2-4GHz/43dB Gain/36dBm Psat

Model: TLPA2G4G-43-36

TLPA2G4G-43-36 is a power amplifier with a typical small signal gain of 43 dB and a minimum Psat of 36 dBm across the frequency range of 2 to 4 GHz. The DC power requirement for the amplifier is +28 VDC/0.7 A. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Frequency range: 2-4GHz
- Gain: 43dB Typ
- Output Power Psat: 36dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

### 电气特性 Electrical Characteristics:

| 参数 Parameter            | Min | Typ | Max | 单位 Units |
|-------------------------|-----|-----|-----|----------|
| 频率范围 Frequency range    | 2   |     | 4   | GHz      |
| 小信号增益 Small Signal Gain | 42  | 43  |     | dB       |
| 增益平坦度 Gain Flatness     |     | ±2  | ±3  | dB       |
| 线性输出功率 Output P1dB      |     | 34  |     | dBm      |
| 饱和输出功率 Output Psat      | 36  | 37  |     | dBm      |
| 谐波 Harmonics@Pout=36dBm |     |     | -10 | dBc      |
| 输入驻波 Input VSWR         |     | 1.5 | 2   | :1       |
| 直流电压 DC Voltage         |     | +28 |     | V DC     |
| 直流电流 DC Supply Current  |     | 0.7 | 2   | A        |
| 阻抗 Impedance            |     | 50  |     | Ohms     |

## 机械特性 Mechanical Specifications:

| 参数 Parameter                    | 指标 Value              | 单位 Units |
|---------------------------------|-----------------------|----------|
| 输入/输出接口 Input /Output Connector | SMA Female/SMA Female |          |
| 直流供电接口 DC Supply Connector      | J30J-9ZKP             |          |
| 尺寸 Size                         | 100*70*15             | mm       |
| 重量 Weight                       | 150                   | g        |


## 绝对最大值 Absolute Maximum Ratings:

| 参数 Parameter                 | 指标 Value             |
|------------------------------|----------------------|
| 供电偏置电压 Supply Bias Voltage   | +28V                 |
| 输入功率 RF Input Power          | 0 dBm                |
| ESD灵敏度 ESD sensitivity (HBm) | Class 0, passed 150V |



## 外形图 Outline Drawing:

Unit:mm

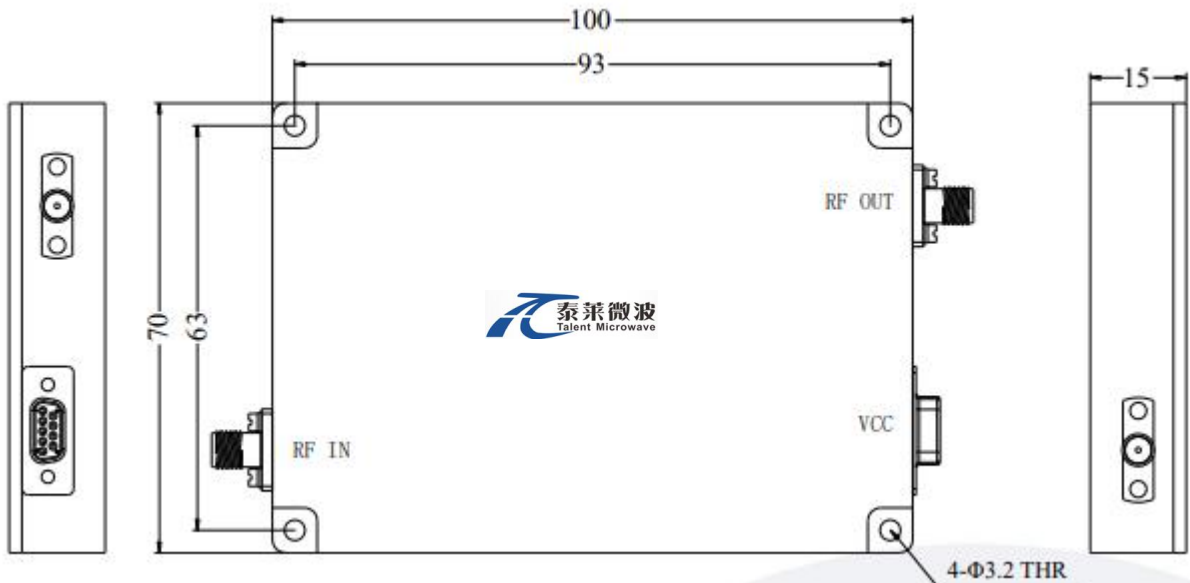

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 温度环境 Environmental Conditions:

| 参数 Parameter                       | Min   | Typ | Max | 单位 Units |
|------------------------------------|---|-----|-----|----------|
| 操作温度 Operating Temperature*        | -40   |     | +60 | °C       |
| 存储温度 Non-operating Temperature*    | -50   |     | +70 | °C       |
| 相对湿度 Relative humidity             |   | 95  |     | %        |
| 海拔 Altitude                        | 30,000  |     |     | feet     |
| 震动 Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis |     |     |          |
| 冲击 Shock(non operating)            | 20G for 11msc half sin wave,3 axis both directions  |     |     |          |


\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:

| 标准型号 Base Number  | 描述 Description   | 版本号 Revision |
|-------------------|--|--------------|
| TLPA2G4G-43-36    | Power amplifier 2-4GHz,<br>Gain:43dB,Psat:36dBm,+28V DC,Without Heatsink | Rev.1.1      |
| TLPA2G4G-43-36-HS | Power amplifier 2-4GHz,<br>Gain:43dB,Psat:36dBm,+28V DC,With Heatsink    | Rev.1.1      |

## 典型曲线 Typical Performance Data:


### Input VSWR vs Frequency

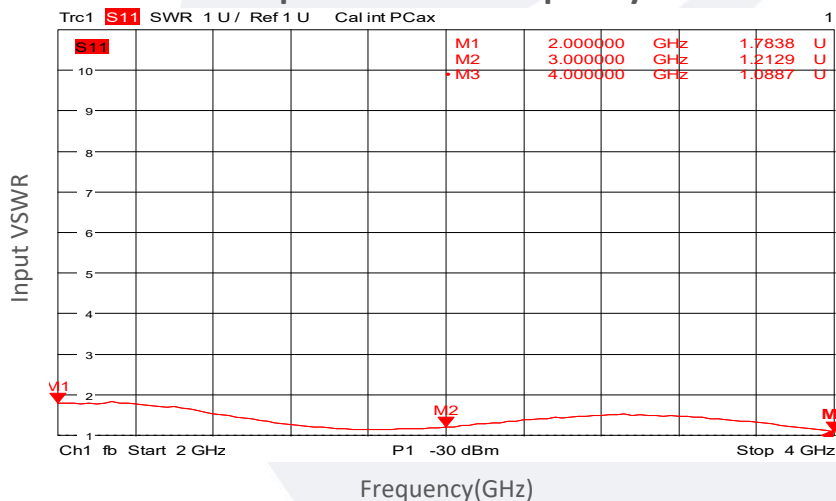


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:


### Small Signal Gain vs Frequency

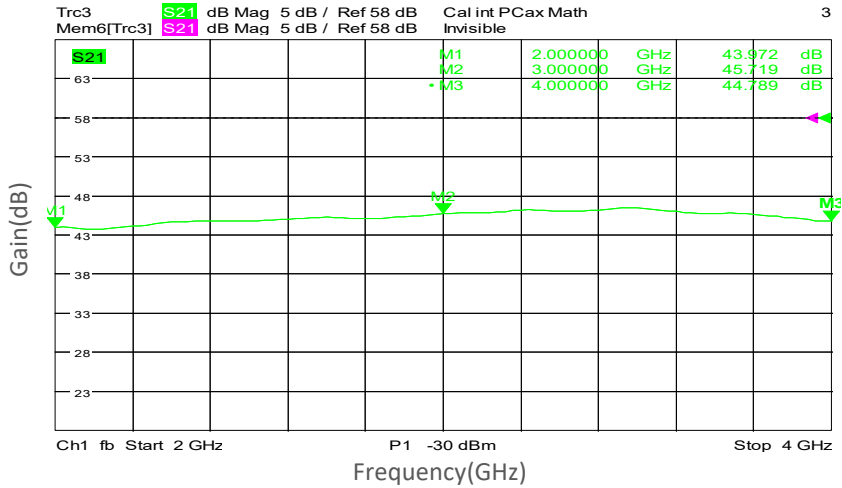

### Gain vs Output Power

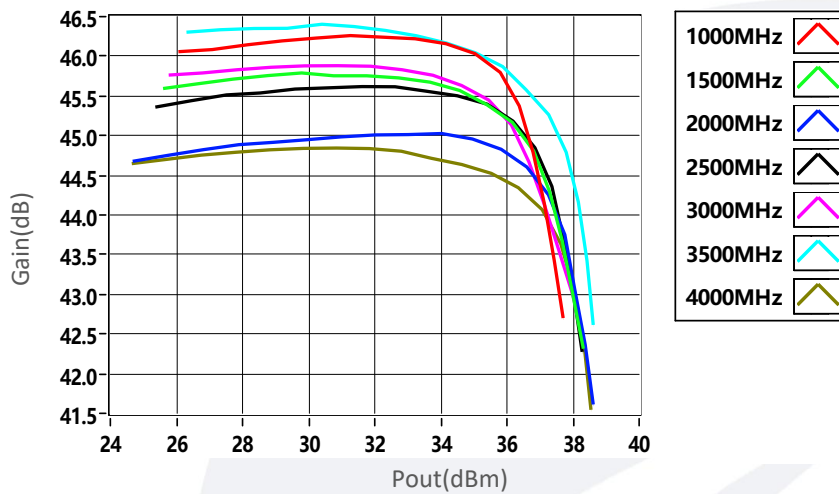


### PndB vs Frequency

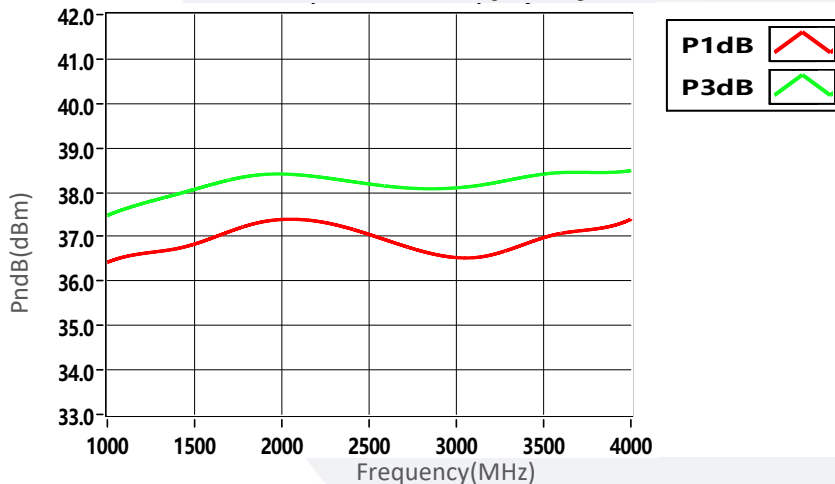


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Psat vs Frequency

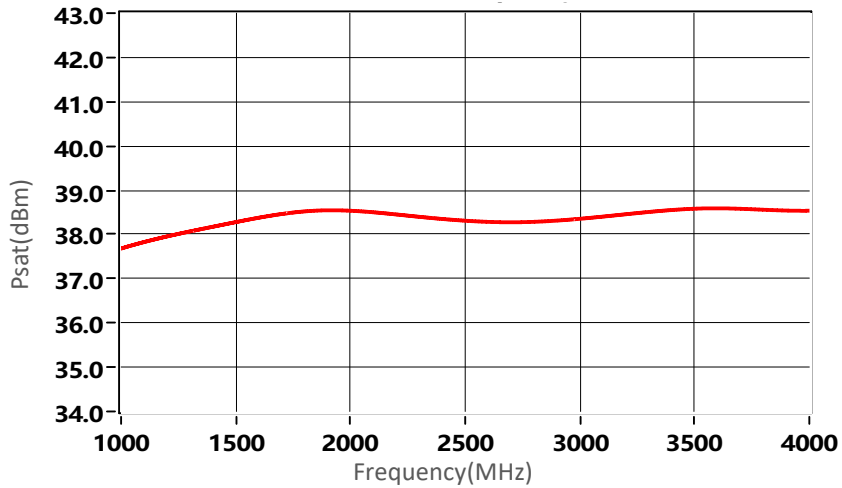

2nd Harmonics vs Output Power

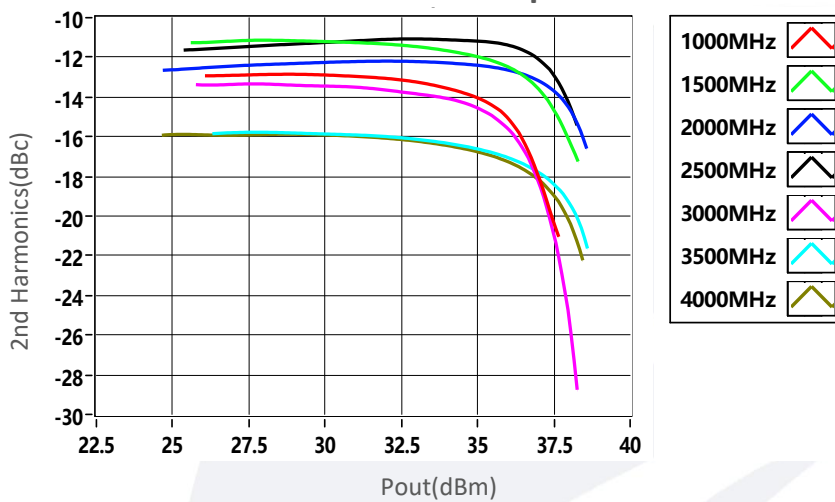

3rd Harmonics vs Output Power

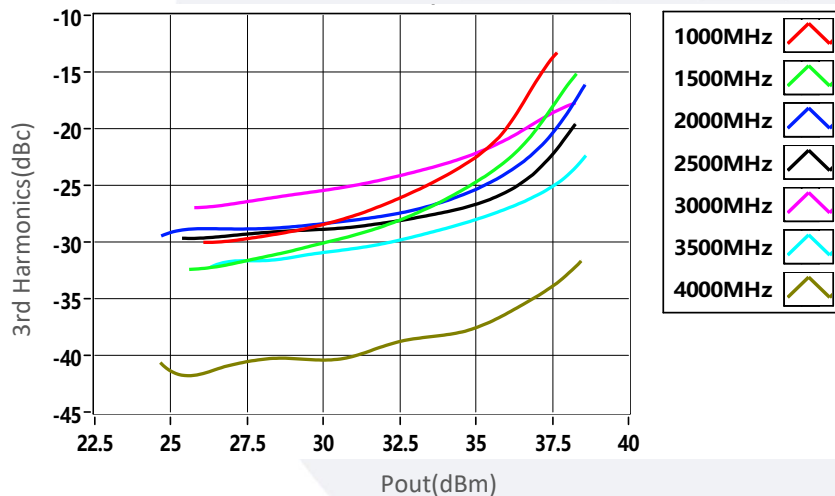

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.