

## Low Noise Amplifier

18-40GHz/5.0dB NF/40dB Gain/20dBm P1dB

Model: TLLA18G40G-40-50

TLLA18G40G-40-50 is a low noise amplifier with a minimum small signal gain of 40 dB and a maximum noise figure of 5.0 dB across the frequency range of 18 to 40 GHz. The DC power requirement for the amplifier is +12 V DC. The input and output port configuration offers coax adapter structure with 2.92mm female.

### Features:

- Frequency range: 18-40GHz
- Gain: 40dB Min
- Noise Figure: 5.0dB Max
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	18		40	GHz
小信号增益 Small Signal Gain	40			dB
增益平坦度 Gain Flatness		±4		dB
噪声系数 Noise Figure		3	5	dB
线性输出功率 Output P1dB	20			dBm
杂散 Spurious			-60	dBc
谐波 Harmonic			-15	dBc
输入驻波 Input VSWR		2		:1
直流电压 DC Voltage		+12		V DC
功耗 Power Consumption			1.5	W
阻抗 Impedance	50			Ohms

## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm Female/2.92mm Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	60*65*11	mm
重量 Weight	≤200	g


## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



## 外形图 Outline Drawing:

Unit:mm

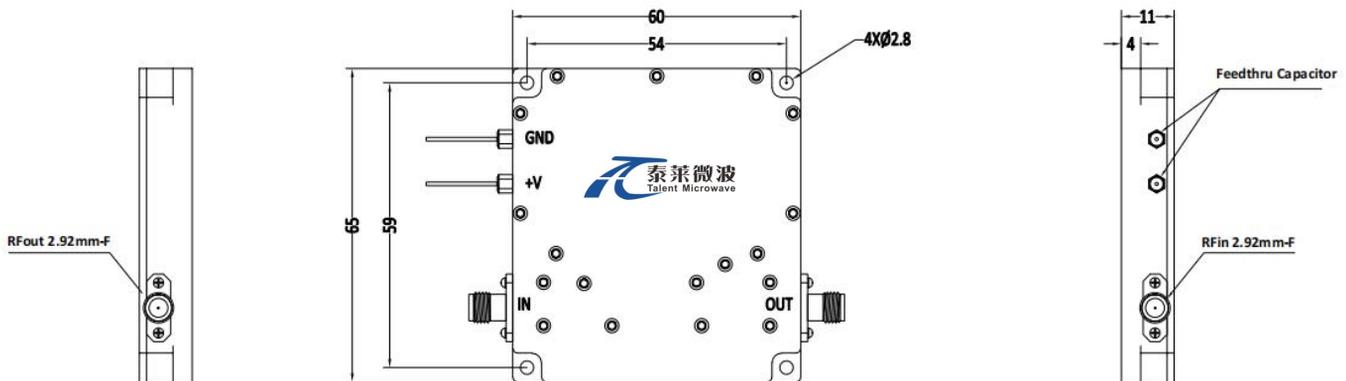

## \*\*\*Heat Sink Required During Operation



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-40		+60	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLA18G40G-40-50	Low Noise Amplifier, 18-40GHz, Noise Figure:5.0dB, Gain:40 dB,P1dB:20dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA18G40G-40-50-HS	Low Noise Amplifier, 18-40GHz, Noise Figure:5.0dB, Gain:40 dB,P1dB:20dBm,+12V DC,With Heatsink	Rev.1.1