

## Low Noise Amplifier

0.03-6GHz/2.0dB NF/38dB Gain/13dBm P1dB

Model: TLLA0.03G6G-38-20

TLLA0.03G6G-38-20 is a low noise amplifier with a typical small signal gain of 38 dB and a maximum noise figure of 2.0 dB@0.1-6GHz across the frequency range of 0.03 to 6 GHz. The DC power requirement for the amplifier is +12 V DC/80 mA. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Frequency range: 0.03-6 GHz
- Gain: 38dB Typ
- Noise Figure: 2.0dB Max@0.1-6GHz
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.03		6	GHz
小信号增益 Small Signal Gain		38		dB
增益平坦度 Gain Flatness		±2.5		dB
噪声系数 Noise Figure	@0.03-0.1GHz	3		dB
	@0.1-6GHz		2	
线性输出功率 Output P1dB	13	15		dBm
输入驻波 Input VSWR		2	2.2	:1
输出驻波 Output VSWR		2	2.2	:1
直流电压 DC Voltage	+8	+12	+15	V DC
直流电流 DC Supply Current		80		mA
阻抗 Impedance		50		Ohms

## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	32.1*29.2*11	mm


## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



## 外形图 Outline Drawing:

Unit:mm

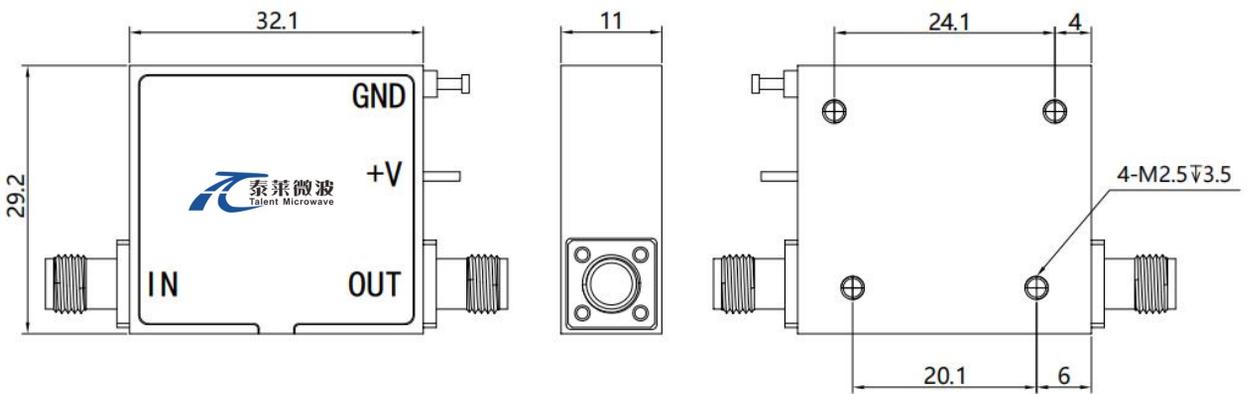

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLA0.03G6G-38-20	Low Noise Amplifier, 0.03-6GHz, Noise Figure:2dB, Gain:38 dB,P1dB:13dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA0.03G6G-38-20-HS	Low Noise Amplifier, 0.03-6GHz, Noise Figure:2dB, Gain:38 dB,P1dB:13dBm,+12V DC,With Heatsink	Rev.1.1

## 典型曲线 Typical Performance Data:


### Gain&VSWR vs Frequency

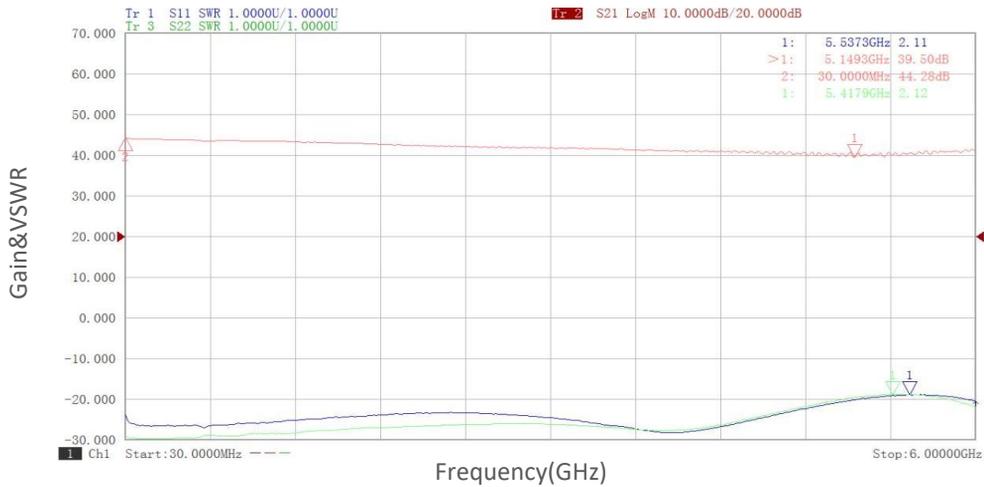

### Noise Figure vs Frequency






### Noise Figure vs Frequency

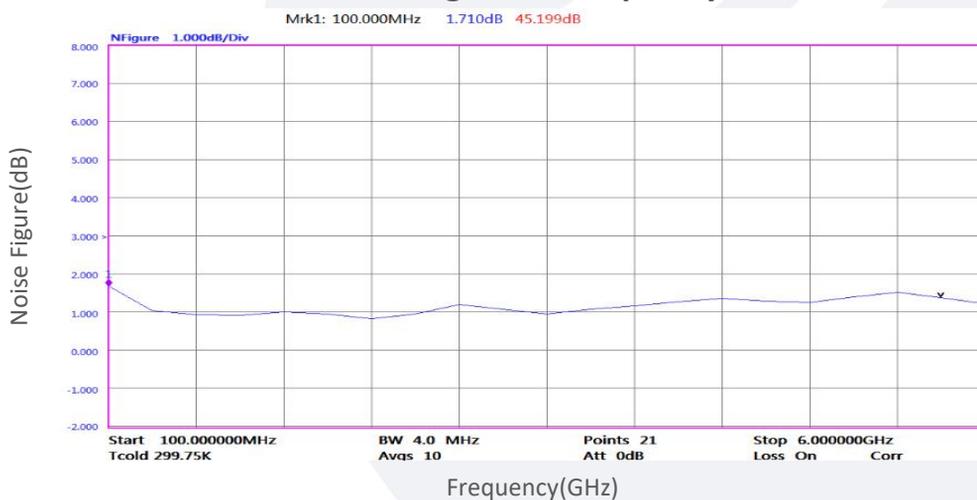

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.


**典型曲线 Typical Performance Data:**

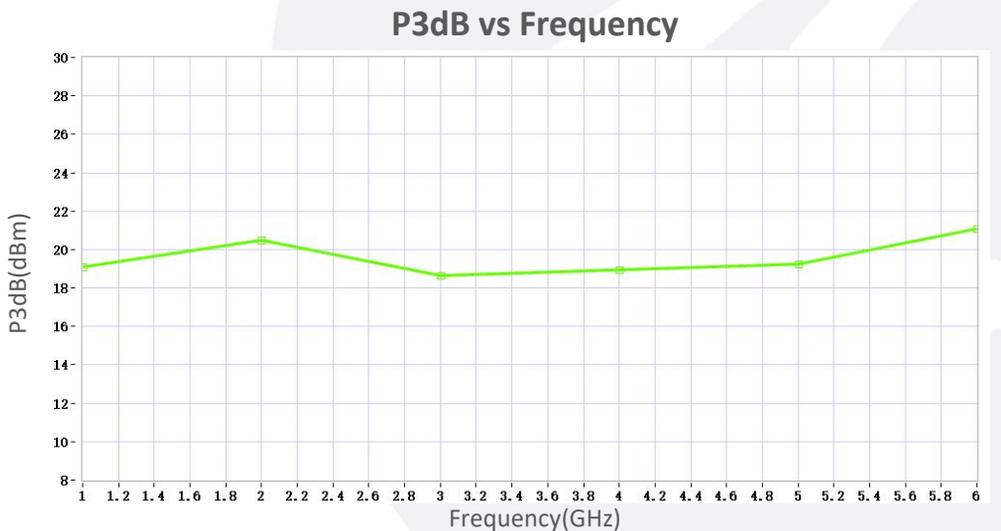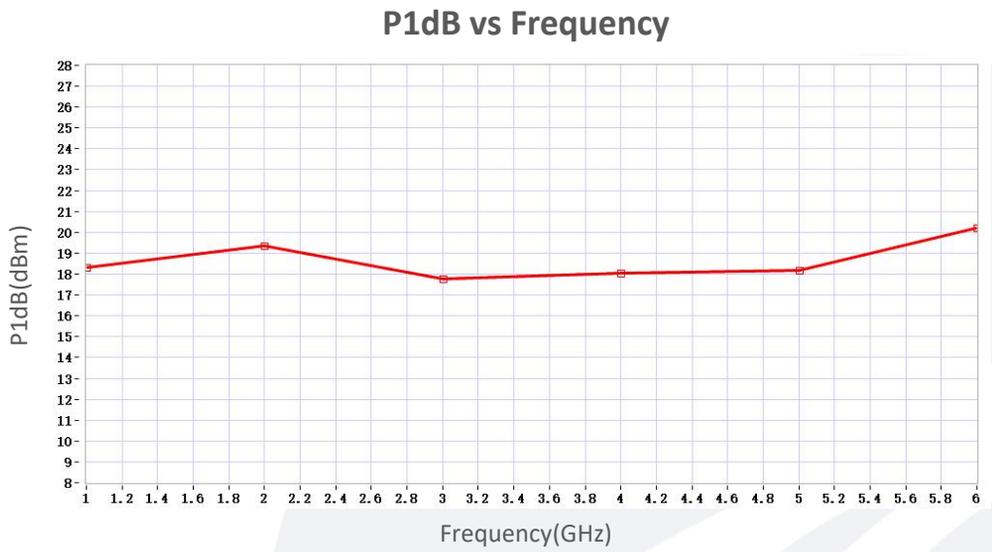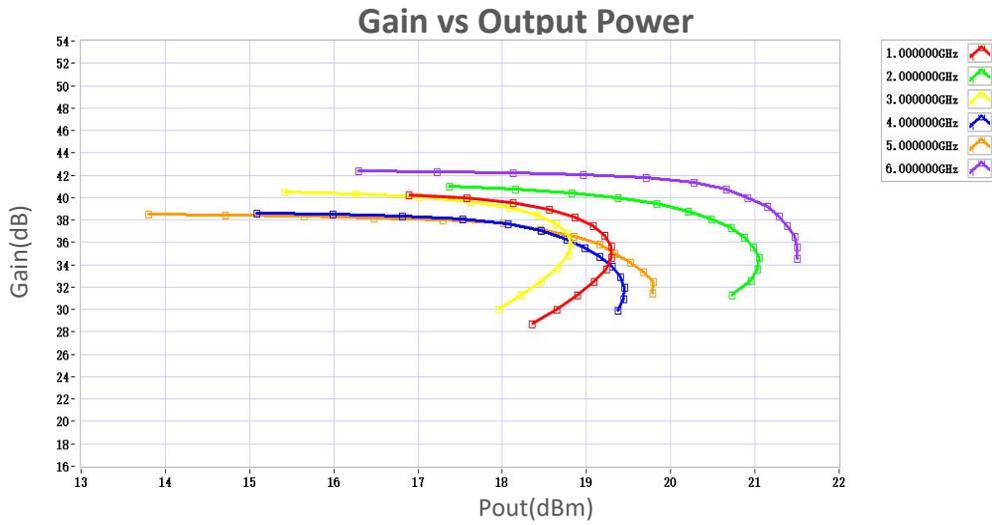

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:

### Psat vs Frequency

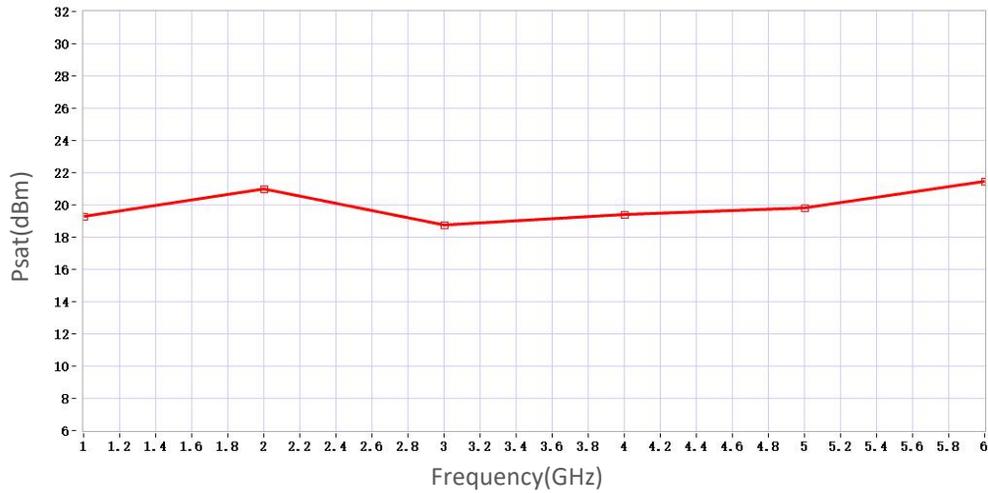

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.