

Coaxial Band-pass Filter

630-700 MHz/SMA Female

Model: TLBF-630M-700M-L

TLBF-630M-700M-L is a coaxial band-pass filter with a passband frequency from 630 to 700 MHz and a rejection frequencies from DC to 580 MHz and point at 750 MHz. The maximum insertion loss of the filter is 2.8 dB and the minimum rejection is 15 dB.

Features:

- Passband Frequency Range 630 to 700 MHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	630		700	MHz
通带插损 Passband Insertion Loss			2.8	dB
带内纹波 Pass Band Ripple			2.6	dB
驻波 VSWR			1.6	:1
带外抑制 Rejection@DC-580MHz&750MHz	15			dB
耐受功率 Power Handling			2	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	10*12*40	mm

外形图 Outline Drawing: Unit:mm

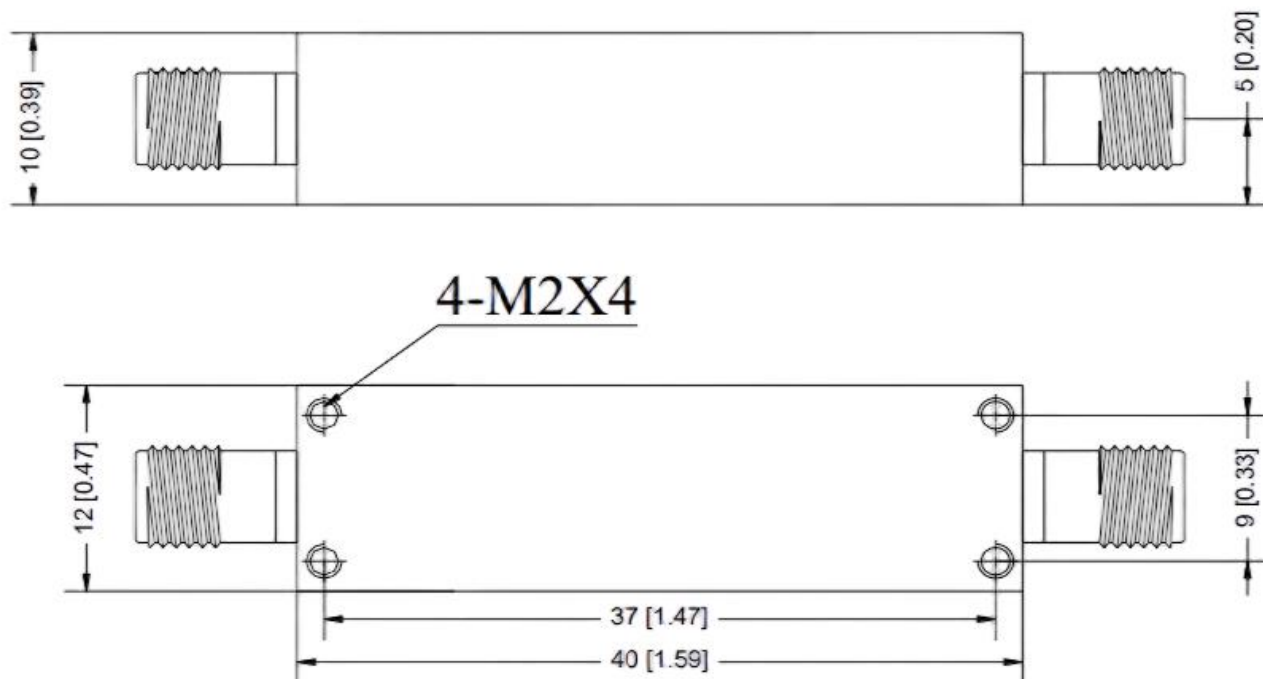

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-630M-700M-L	Coaxial Band-pass Filter, Passband frequency range: 630-700MHz, Passband Insertion Loss: 2.8dB, SMA Female	Rev.1.0