

## Power Amplifier

**6-18GHz/50dB Gain/48dBm Psat/Power Adjustable Model: TLPA6G18G-48-48-ATT**

TLPA6G18G-48-48-ATT is a power amplifier with a typical power gain of 50 dB and a minimum Psat of 48 dBm across the frequency range of 6 to 18 GHz. The DC power requirement for the amplifier is +28 VDC/18 A. The input port configuration offers coax adapter structure with SMA female and output port configuration offers coax adapter structure with N female.

### Features:

- Frequency range: 6-18GHz
- Gain: 50dB Typ
- Output Power Psat: 48dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	6		18	GHz
功率增益 Power Gain	48	50		dB
增益平坦度 Gain Flatness		±4.5		dB
线性输出功率 Output P1dB		45		dBm
饱和输出功率 Output Psat	48			dBm
杂散 Spurious@Pout=47dBm		-60	-50	dBc
二次谐波 2nd Harmonic@Pout=48dBm		-20	-12	dBc
输入驻波 Input VSWR			2	:1
直流电压 DC Voltage		+28		V DC
直流电流 DC Current		18		A
功耗 Power Consumption		800		W
阻抗 Impedance		50		Ohms

## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/N Female	
正向/反向耦合 Forward/Reverse Coupling	SMA Female/ SMA Female	
直流供电接口 DC Power Supply Connector	DSUB-5W5	A1~2:+28V A3~5:GND
尺寸 Size	255*200*107.4	mm
重量 Weight	500	g


## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+29 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



## 外形图 Outline Drawing:

Unit:mm

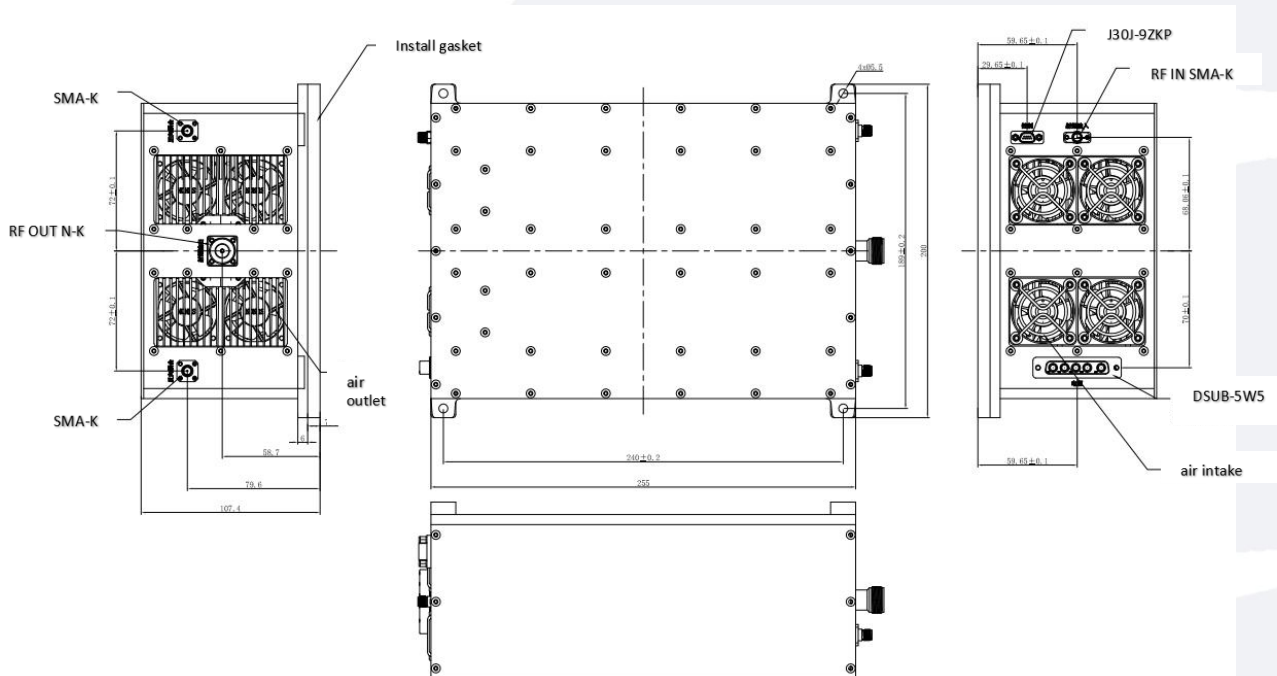

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 控制接口 Control Connector(J30J-9ZKP):

J30J-9ZKP	
引脚 Pin	功能 Function
1	TTL(High level conduction, low level cutoff)
2	0.5dB attenuation
3	1dB attenuation
4	2dB attenuation
5	4dB attenuation
6	8dB attenuation
7	16dB attenuation
8~9	GND

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+40	°C
存储温度 Non-operating Temperature*	-30		+50	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLPA6G18G-48-48-ATT	Power amplifier 6-18GHz, Gain:50dB,Psat:48dBm,+28V DC,Without Heatsink	Rev.1.1
TLPA6G18G-48-48-ATT-HS	Power amplifier 6-18GHz, Gain:50dB,Psat:48dBm,+28V DC,With Heatsink	Rev.1.1

**典型曲线 Typical Performance Data:**


**Input VSWR vs Frequency**

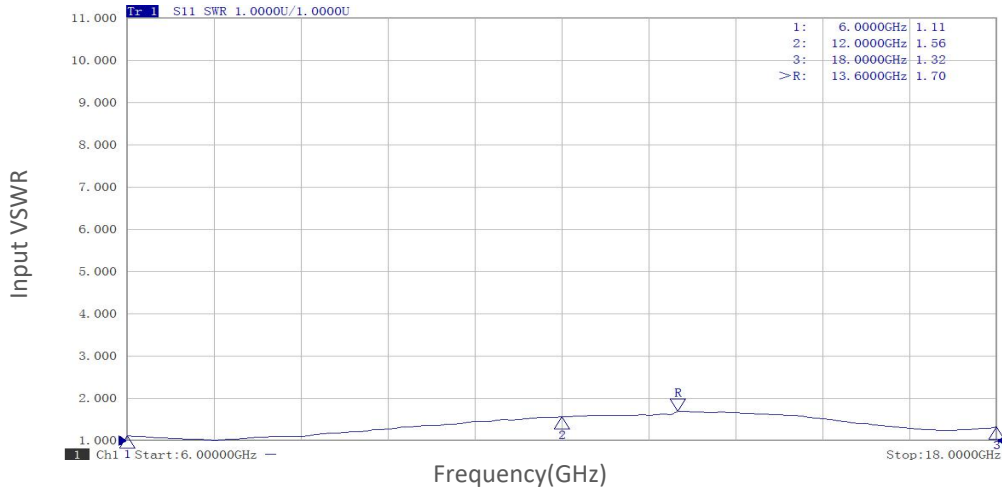

**Small Signal Gain vs Frequency**

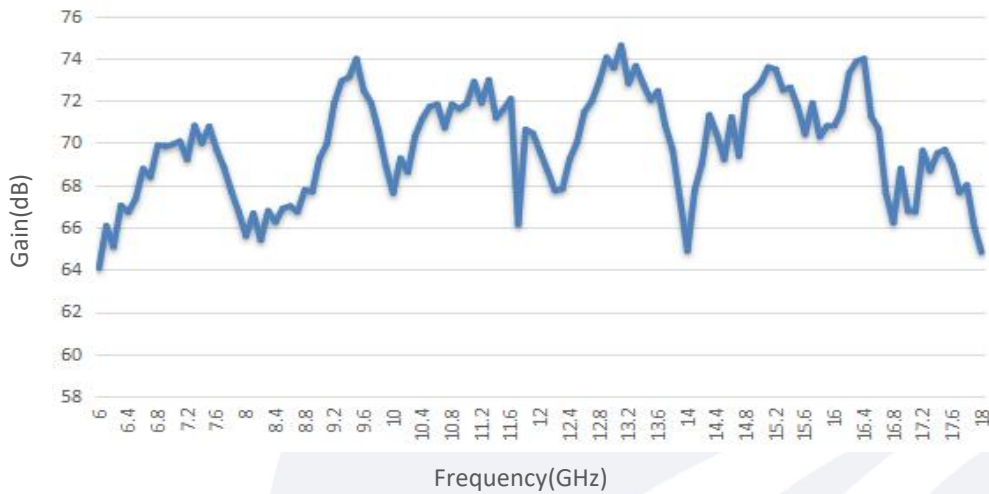


**P1dB vs Frequency**

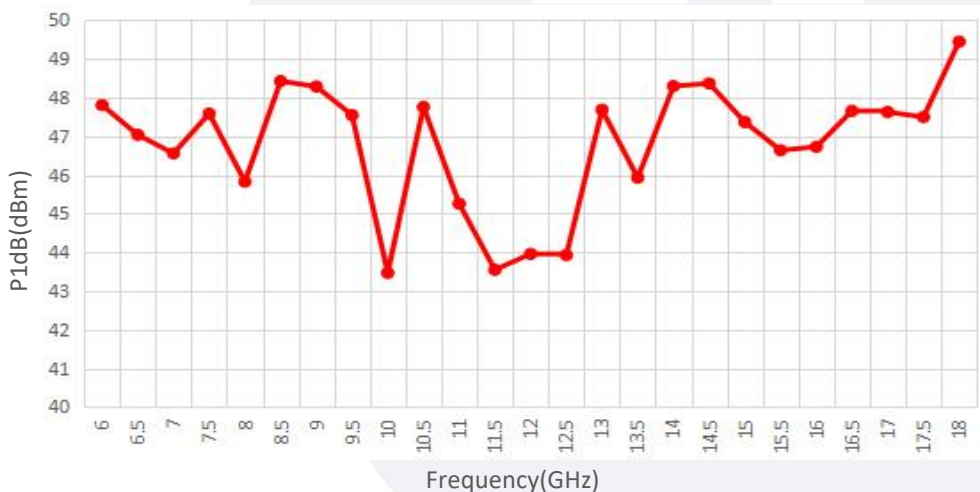


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

**典型曲线 Typical Performance Data:**


**Pout@Pin**

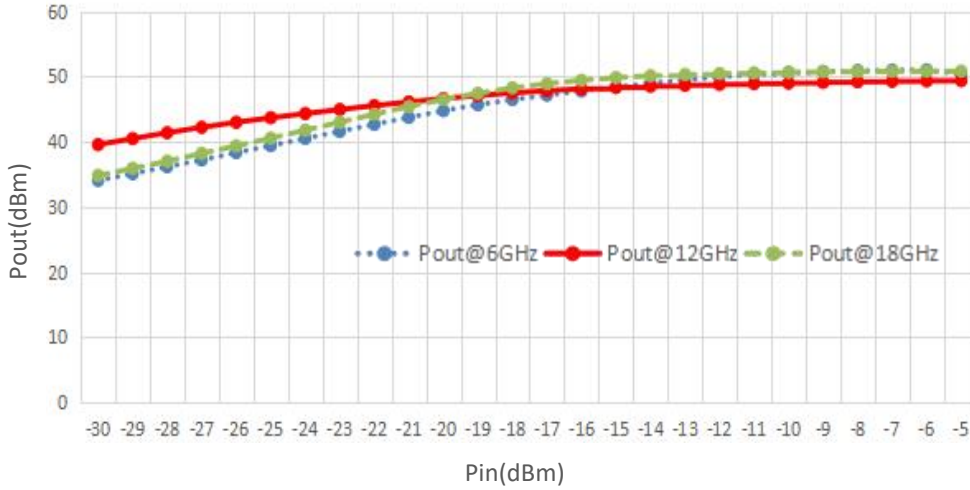

**Pout@Equal\_Pin**

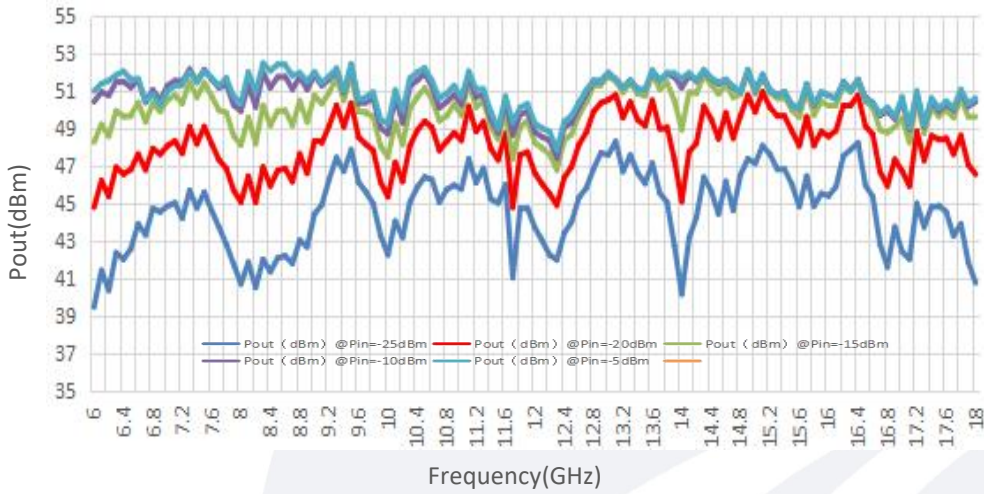


**Spurious vs Frequency**

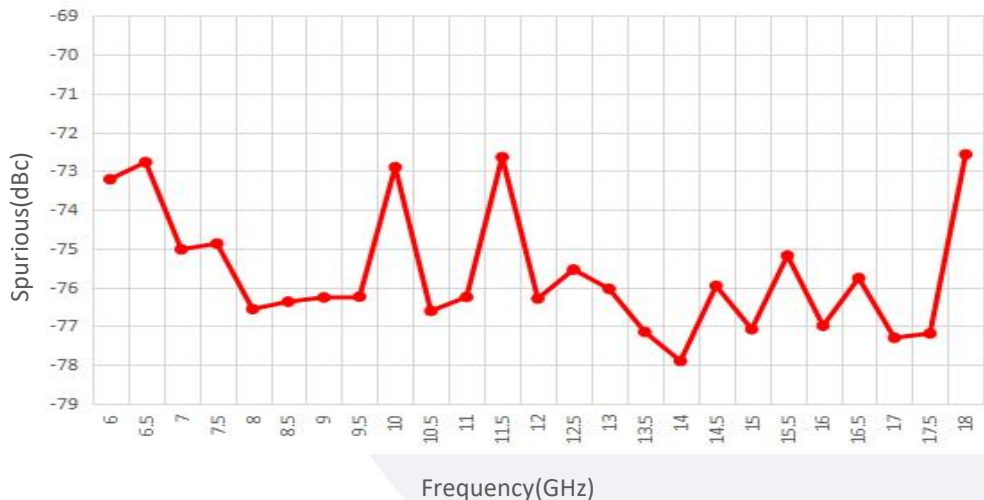

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:

### Harmonic vs Frequency

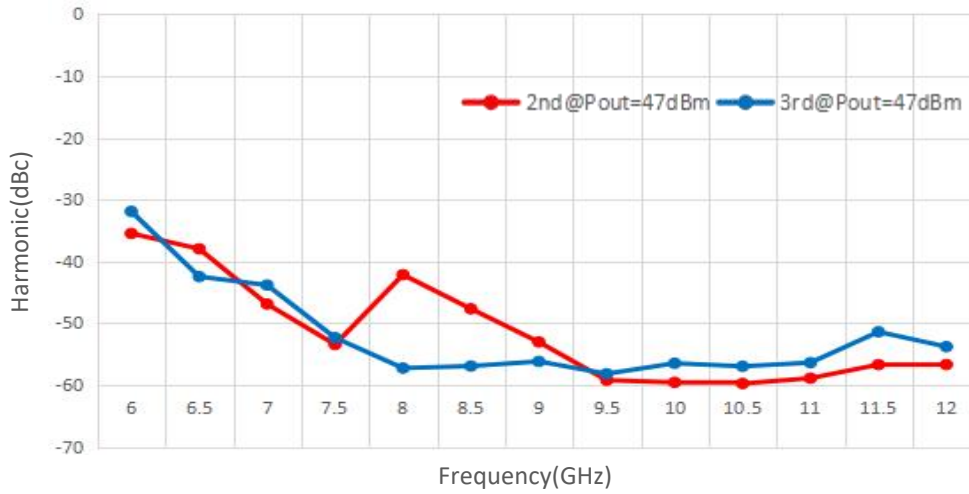

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.