泰莱微波 Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

V-Band Dual Balance Mixer

RF:55-75 GHz/LO:55-75 GHz/IF:DC-20 GHz Model: TLBM-055075-20-15

TLBM-055075-20-15 is a dual balance mixer. The mixer covers the LO and RF frequency from 55 to 75 GHz with an extremely broad IF output from DC to 20 GHz. The mixer offers a conversion loss of 10 dB typical and LO input power of 18 dBm typical. The V-band,X4 multiplier of Talent model TMAM-050075-0417-15 can be used as the LO driver for this mixer.

Features:

- RF/LO coverage : 55-75 GHz
- IF operation : DC-20 GHz
- Conversion loss: 10 dB Typ
- High LO to RF isolation
- Dual Balanced Mixer
- Suggested LO drive model: TMAM-050075-0417-15

Applications:

- Defense & federal communications
- Instrumentations

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
RF频率 RF Frequency	55		75	GHz
LO频率 LO Frequency	55		75	GHz
LO驱动功率 LO-Input power	16	18	20	dBm
IF频率 IF Frequency	DC		20	GHz
RF输入P1dB RF Input P1dB		8		dBm
单边带变频损耗 SSB Conversion Loss		10		dB

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
RF 接口 RF Connector	WR-15/UG-385/U	
LO 接口 LO Connector	WR-15/UG-385/U	
IF 接口 IF Connector	2.92mm Female	
尺寸 Size	28*20*20	mm


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
RF 功率 RF Input Power	15 dBm
IF 功率 IF Input Power	15 dBm
LO 功率 LO Input Power	20 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

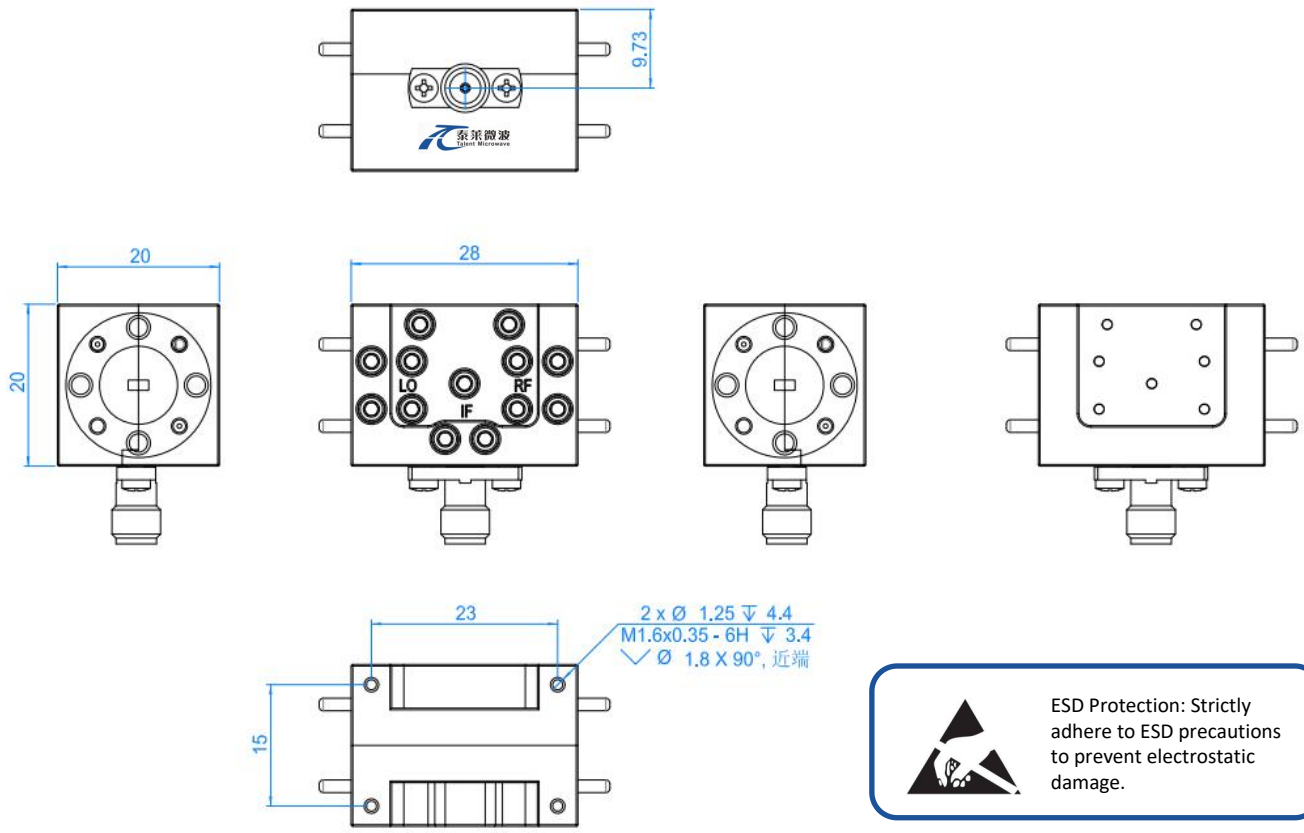

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-25		+50	℃
存储温度 Non-operating Temperature	-45		+85	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBM-055075-20-15	V-Band Dual Balanced Mixer RF:55-75GHz,LO:55-75GHz,IF:DC-20GHz	Rev.1.1

典型曲线 Typical Performance Data:

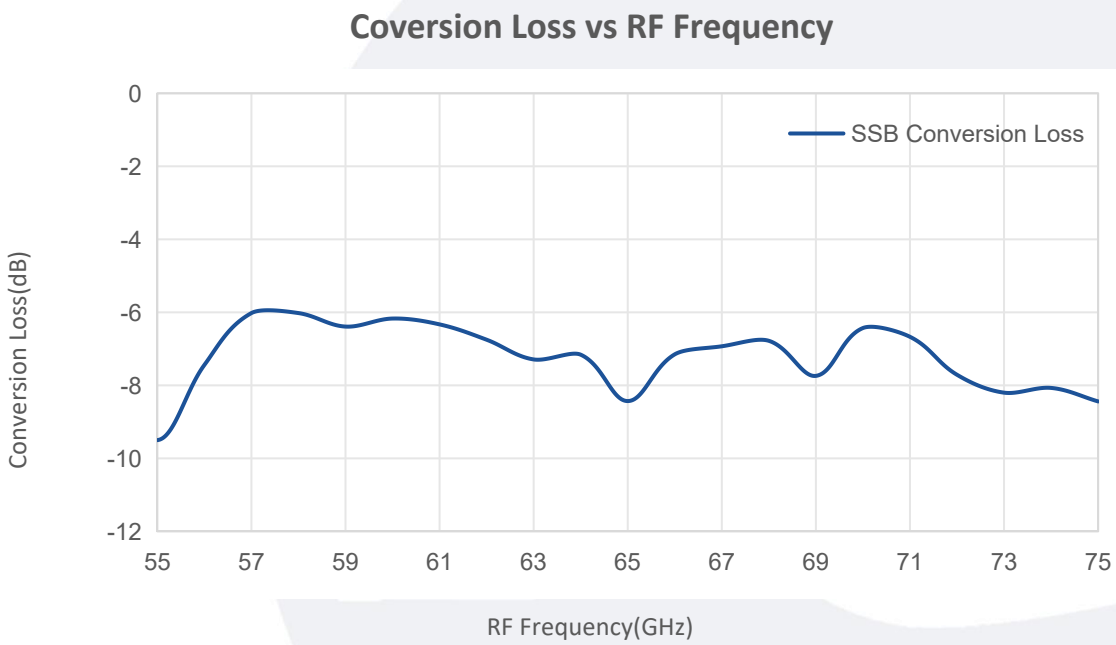

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.