泰莱微波 Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

G-Band Fundamental Mixer

RF:140-220 GHz/LO:140-220 GHz/IF:DC-40 GHz Model: TLBM-140220-40-05

TLBM-140220-40-05 is a G-Band Fundamental mixer. The mixer supports the full waveguide band operation for LO and RF frequency from 140 to 220 GHz with an extremely broad IF output from DC to 40 GHz. The mixer offers a conversion loss of 12dB@IF=1GHz maximum and LO input power of 7 dBm typical. The G-band, X12 multiplier of Talent model TMAM-140220-1208-05 can be used as the LO driver for this mixer.

Features:

- RF Frequency range: 140-220GHz
- LO Frequency range: 140-220GHz
- IF Frequency range: DC-40GHz
- Low LO Power Requirement
- Subharmonic Mixing
- Suggested LO drive model: TMAM-140220-1208-05

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
RF频率 RF Frequency	140		220	GHz
LO频率 LO Frequency	140		220	GHz
IF频率 IF Frequency	DC		40	GHz
LO驱动功率 LO Input Power		6		dBm
变频损耗 Conversion Loss@IF=1GHz		12		dB
变频损耗 Conversion Loss@LO=178GHz		14		dB
偏置电压 Bias Voltage	-1.2	-1	-0.8	V DC

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
RF 接口RF Connector	WR-5.1/UG-387/U	
LO 接口LO Connector	WR-5.1/UG-387/U	
IF 接口 IF Connector	2.92mm Female	


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
RF 功率 RF Input Power	13 dBm
IF 功率 IF Input Power	13 dBm
LO 功率 LO Input Power	13 dBm
偏置电压 Bias Voltage	-2V~0V
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

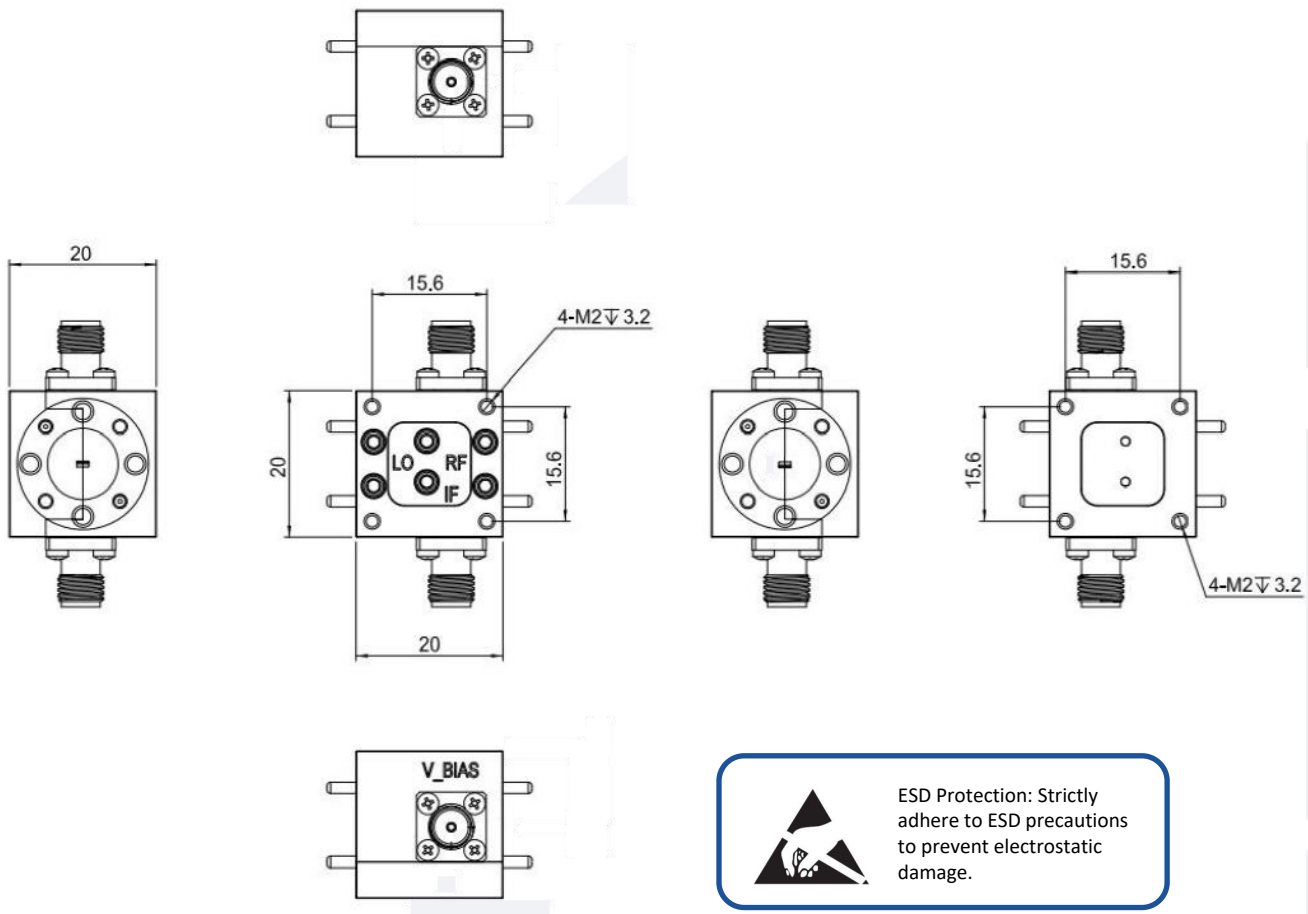

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	℃
存储温度 Non-operating Temperature	-45		+85	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBM-140220-40-05	D-Band Fundamental Mixer RF:140-220GHz,LO:140-220GHz,IF:DC-40GHz	Rev.1.1