

Coaxial DC Block

30KHz-110GHz/1.0 mm/25V

Model:TDCB1M1M-3

The TDCB1M1M-3 is a 1.0mm coaxial DC block that prevents the flow of DC current in the frequency range of 30KHz to 110GHz. The DC block has a typical insertion loss of 2dB, a typical return loss of -12dB. It is manufactured with 1.0mm male connectors for convenient circuit insertion. The breakdown voltage is +25 Volts..

Features:

- Operating Frequency 30KHz to 110GHz
- High Return Loss
- Low Cost

Applications:

- laboratory test
- Instrumentations
- System Integration

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	30KHz-110GHz			
回波损耗 Return Loss		-12		dB
插损 Insertion Loss		2	2.5	dB
击穿电压 Breakdown Voltage		25		V
群延时 Group Delay		80		ps
阻抗 Impedance		50		Ohms

环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
壳体材质 Body Material	Copper	
表面处理 Finish	Gold plated	
内导体 Inner Conductor	BeCu, Golden	
接口 Connectors	1.0mm Male/1.0mm Male	
长度 Length	23.9*9.5*9.5	mm
工作温度 Working Temperature	-40° to +70° C, operating	

外形图 Outline Drawing:

Unit:mm

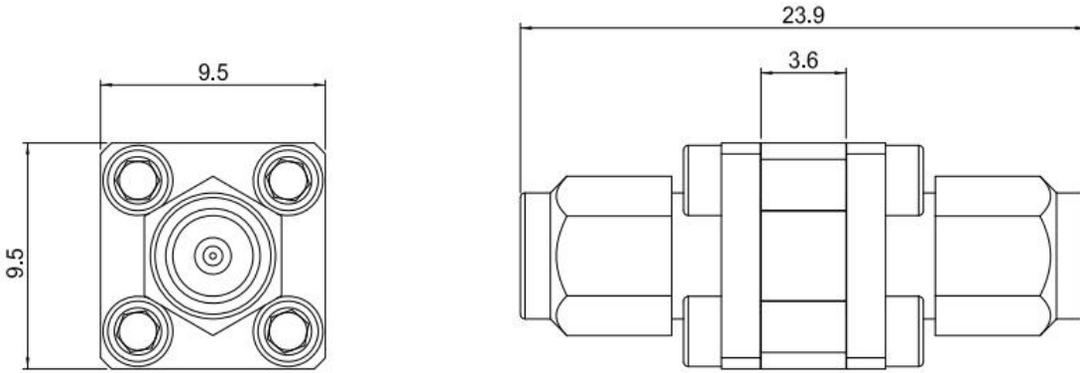

订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TDCB1M1M-3	30KHz-110GHz,25V,1.0mm Coaxial DC Block