

W-Band Low Power Termination Load 75-110GHz/WR10/0.5W

Model: TLTT-75110-27-10

TLTT-75110-27-10 is a general purpose WR-10 millimeter waveguide termination. This waveguide termination will operate from 75 to 110 GHz. A Millimeter Waveguide Termination is a passive RF device specifically designed to prevent RF signals from reflecting back from open-ended or unused waveguide ports. Millimeter Waveguide Terminations dissipate RF energy by producing heat energy.

Features:

- Frequency range: 75-110GHz
- High Return Loss
- Instrumentation Grade

Applications:

- Communication Systems
- Test Equipment


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 RF Frequency range	75		110	GHz
回波损耗 Return Loss		-35		dB
承受功率 Power Handling			0.5	W

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
操作温度 Operating Temperature	-55 To +125	°C
存储温度 Storage Temperature	-55 To +125	°C
接口 Connector	WR-10/UG-387/U	
表壳材质 Case Material	Copper	
表面处理 Finish	Gold Plated	
尺寸 Size	40.9*8.5	mm

外形图 Outline Drawing: Unit:mm

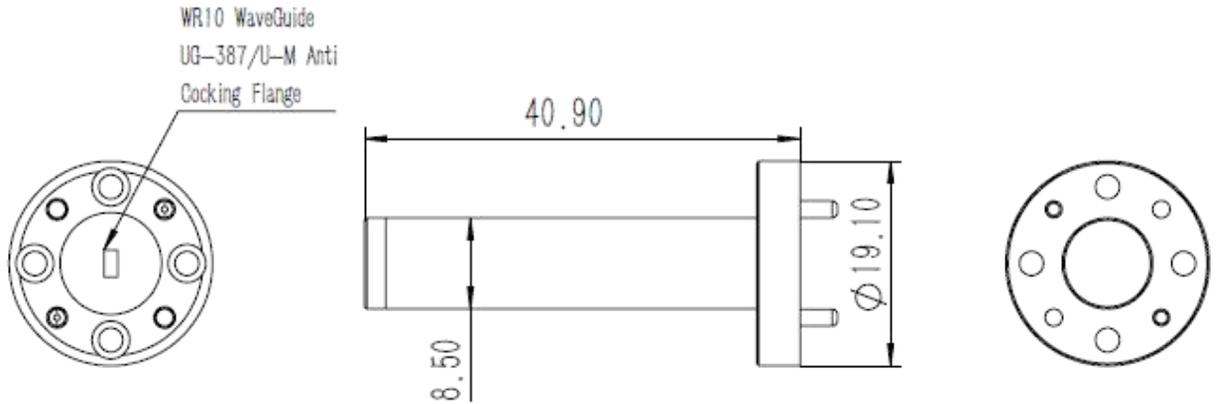


订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLTT-75110-27-10	W-Band Low Power Termination Load Return Loss:-35dB	Rev.1.1

典型曲线 Typical Performance Data:

Return Loss vs Frequency

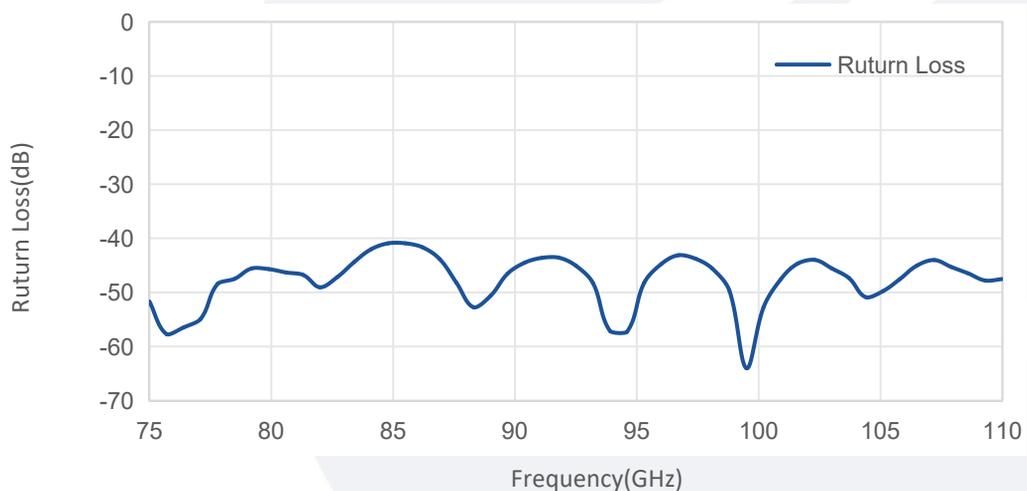

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.