

## Absorptive, Broadband PIN Switch

### 18-67GHz/SP4T/1.85mm Female

**Model: TLSP4T18G67GA**

The TLSP4T18G67GA is an absorptive PIN diode based switch with a TTL driver that operates between 18 and 67 GHz. The SP4T switch offers 45 dB port-to-port isolation with a typical switching speed of 50 nanoseconds. The input and output connectors of the switch are 1.85mm female.

#### Features:

- Frequency range: 18-67GHz
- Insertion Loss: 7dB
- Power Handling: 25dBm
- High Isolation
- Switch Type: Absorptive

#### Applications:

- Communication Systems
- Automatic Test Equipment
- Switching Network

#### 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	18		67	GHz
插损 Insertion Loss		7		dB
隔离 Isolation	45			dB
切换速度 Switch Speed		50	100	ns
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
耐功率 Power Handling			25	dBm
输入P1dB Input P1dB		20		dBm
直流电压 DC Supply Voltage		5		V DC
直流电流 DC Supply Current		120		mA
开关类型 Switch type	Absorptive			
阻抗 Impedance	50			Ohms

## 绝对最大值 Absolute Maximum Ratings :


描述 Description	参数 Parameter	单位 Units
供电偏置电压 Supply Bias Voltage	±5%	V
射频输入功率 RF Input Power	25	dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V	

## 机械特性 Mechanical Specifications:

描述 Description	参数 Parameter	单位 Units
输入/输出接口 Input /Output Connector	1.85mm Female/1.85mm Female	
直流控制接口 Control Bias Connector	Solder Pin	
尺寸 Size	56*23.1*10	mm

## 外形图 Outline Drawing:

Unit:mm

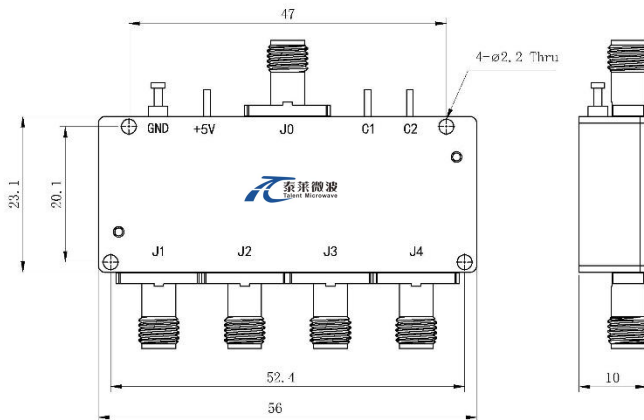

### 真值表 Truth Table

TTL Control Input		Signal Path State
C1	C2	
0	0	J0-J1
0	1	J0-J2
1	0	J0-J3
1	1	J0-J4

### TTL Control Voltages & VDD

Stage	Bias Condition
VDD	+5V (±5%)
Low (0)	0 to 0.8Vdc
High (1)	+3.3 to +5.0Vdc

- Dimensions are in mm [inches]
  - Tolerances: Outline drawing  $\pm 0.2$  [0.008] Hole  $\pm 0.2$  [0.008]
- NOTE: ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLSP4T18G67GA	Absorptive, Broadband PIN Switch 18-67GHz, SP4T, 1.85mm	Rev.1.0