

Active Tx/Rx Converter

40-50GHz/12dB Conversion Loss

Model: TLAMCM-040050-22-4

TLAMCM-040050-22-4 is an up and down fundamental mixer integrated with x4 active frequency multiplier chain. The converter has an input LO frequency of 10 to 12.5 GHz with a typical input power of 0 dBm. RF frequency can range from 40 to 50 GHz and IF port can range from DC to 22GHz with SMA connector.

Features:

- RF Frequency: 40-50GHz
- LO Frequency: 10-12.5GHz
- IF Frequency: DC-22GHz
- Low Conversion Loss

Applications:

- Test Equipment
- Radar System
- Defense & federal communications
- Instrumentations

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
RF频率 RF Frequency	40		50	GHz
4XLO频率 4XLO Frequency	40		50	GHz
LO频率 LO Frequency	10		12.5	GHz
IF频率 IF Frequency	DC		22	GHz
LO驱动功率 LO-Input power		2		dBm
LO倍频次数 LO Multiplier factor		4		
变频损耗 Conversion Loss			12	dB
RF输入P1dB RF Input P1dB	6	10		dBm
直流电压 DC Supply Voltage		12		V DC
直流电流 DC Supply Current		220		mA

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
RF 接口 RF Connector	2.4mm Female	
LO 接口 LO Connector	2.4mm Female	
IF 接口 IF Connector	SMA Female	
尺寸 Size	40*25*12.5	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
RF输入功率 RF Input Power	22 dBm
直流电压 DC Supply Voltage	+15 V
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

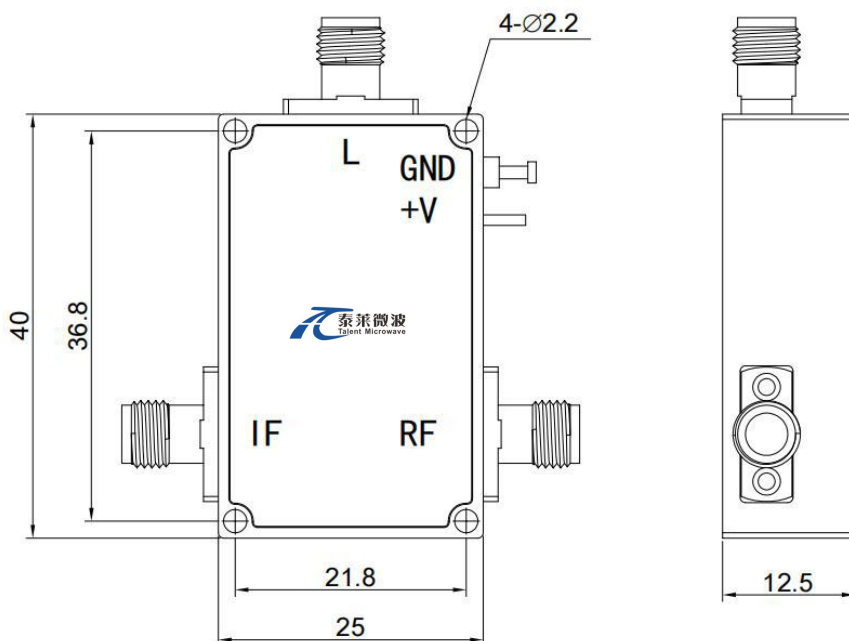

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	0		+50	℃
存储温度 Non-operating Temperature	-45		+85	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLAMCM-040050-22-4	Active Tx/Rx Converter, RF: 40-50GHz, Conversion Loss: 12dB	Rev.1.0