

Coaxial High-pass Filter

1.2-15 GHz/SMA Female

Model: TLHF-1G2-15G-S

TLHF-1G2-15G-S is a coaxial High-pass filter with a passband frequency from 1.2 to 15 GHz and a rejection frequency from DC to 1.032 GHz. The maximum insertion loss is 1.8 dB and the minimum rejection is 80 dB.

Features:

- Passband Frequency Range 1.2 to 15GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
带通频率范围 Passband Frequency range	1.2		15	GHz
带通插损 Pass Band Insertion Loss			1.8	dB
耐受功率 Power Handling		5		W
驻波 VSWR			1.67	:1
带外抑制 Rejection @DC-1.032GHz	80			dB
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +85	°C
存储温度 Storage Temperature	-45 to +90	°C
材质 Material	Aluminum/Black Color	
封装 Package Sealing	General Sealing (Standard)	
接口 Connectors	SMA Female	

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.25mm(0.01)

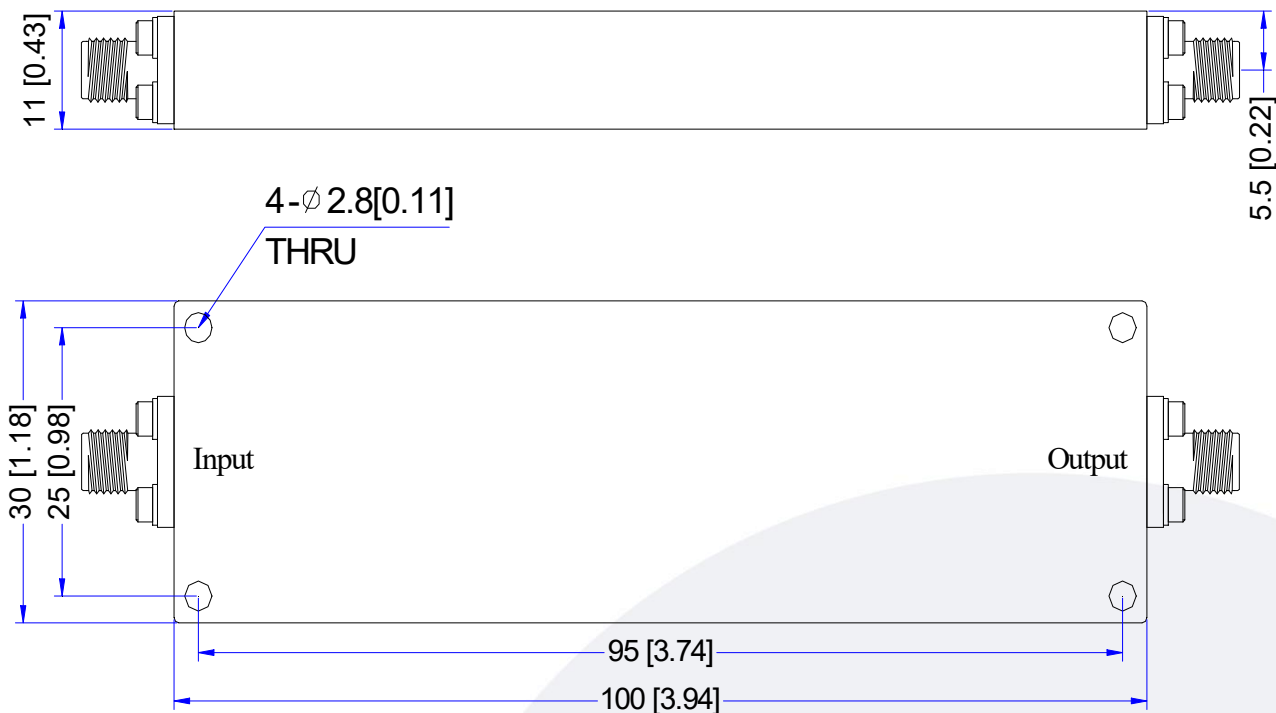

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLHF-1G2-15G-S	Coaxial High-pass Filter, Passband frequency range: 1.2-15GHz, Passband Insertion Loss: 1.8dB, SMA Female Coaxial Fixed Termination	Rev.1.1