

E-band Spectrum Frequency Extension Systems

76-81GHz/WR-12**Model: TLSM-076081-06-12**

TLSM-076081-06-12 spectrum frequency extension systems are a dedicated Test & Measurement solution for extending the range of your signal source to 76-81 GHz.

Features:

- Frequency range: 76-81GHz
- Conversion Loss SSB: 10dB Typ
- Low conversion loss

Applications:

- Frequency Extension
- Antenna measurements
- Material characterisation

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	76		81	GHz
中频输出频率 IF Output Frequency	DC		8	GHz
本振输入频率 LO Input Frequency	12.16		12.67	GHz
射频输入功率 RF Input Power		-10	0	dBm
倍频次数 Multiplication Factor		6		
杂散抑制 Spurious Suppression		60		dBc
变频损耗 Mixer Conversion Loss SSB		10		dB

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
射频输入端口 RF Input Ports	WR-12/UG-387/U	
中频输出端口 IF Output Ports	SMA Female	
供电引脚 Power Supply Pin	FGG 0B 4 Core	
尺寸 Size	250*100*84.7	mm

绝对最大值 Absolute Maximum Ratings :


参数 Parameter	指标 Value
供电电压 Supply Bias Voltage	+240 V AC
射频输入功率 RF Input Power	0 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

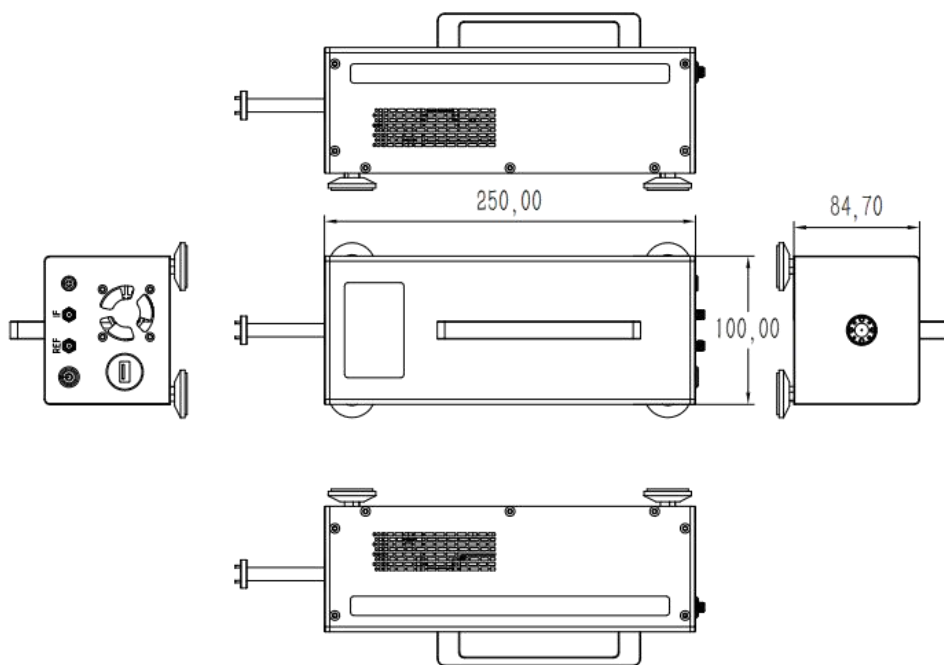

原理框图 Block Diagrams:

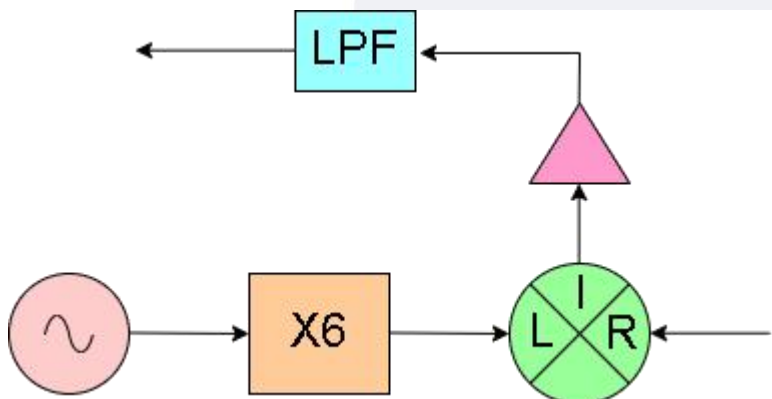

环境和物理特性 Envrionmental And Physical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	0		+45	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TLSM-076081-06-12	E-Band Spectrum Frequency Extension Systems X6, 76-81GHz, Conversion Loss SSB: 10dB typ.	Rev.1.0

随货配件 Components Included:

标准型号 Part Number	描述 Description	数量 Quantity
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS

Notes:

1. Dimensions and specifications may be changed without prior notice.
2. Standard Warranty:three years.