

DC-45-60GHz Continuous Diplexer

DC-45-60GHz/1.85 Female

Model: TMDX-45G60G-1.85

TMDX-45G60G-1.85 is a continuous Diplexer that operates from DC to 60 GHz. The diplexer offers a typical insertion loss of 1.5 dB, with an insertion loss of 5dB at the channel crossover point, and a typical return loss of 10 dB. All ports exhibit good impedance matching for transmit- receive duplexing applications across the operating band. The diplexer is configured as an inline package with 1.85 mm coaxial connectors at all ports.

Features:

- Frequency range: DC-60GHz
- Low Insertion Loss
- High Isolation
- Compact Package

Applications:

- Test Lab
- Sub-assemblies
- Test Instrumentations

电气特性 Electrical Characteristics:


参数 Parameter	最小 Min	典型 Typ	最大 Max	最小 Min	典型 Typ	最大 Max	单位 Units
	RF_DLP			RF_DHP			
频率范围 Frequency range	DC		45	45		60	GHz
插损 Insertion Loss		1.5			0.9		dB
端口隔离 Port Isolation		30dB @52GHz			30dB @38.5GHz		dB
输入回波损耗 Input Return Loss		-10			-10		dB
阻抗 Impedance		50			50		Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	1.85 Female	
尺寸 Size	19*20.48*10.2	mm
材质 Material	Aluminum	
表面处理 Finish	Oxidation	

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

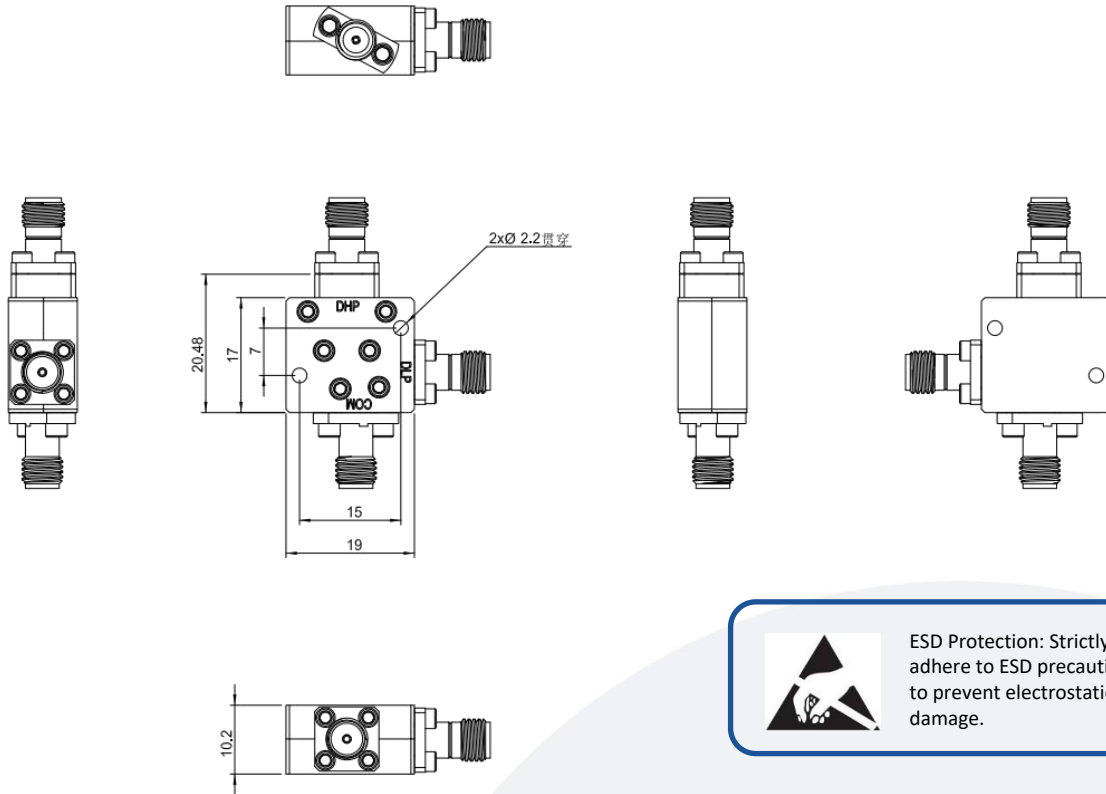

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TMDX-45G60G-1.85	3-port continuous diplexer , DC-45-60GHz, Insertion loss: 1.5dB(typ), Return loss: 10dB(typ)	Rev.1.0

典型曲线 Typical Performance Data:

Insertion Loss vs Frequency

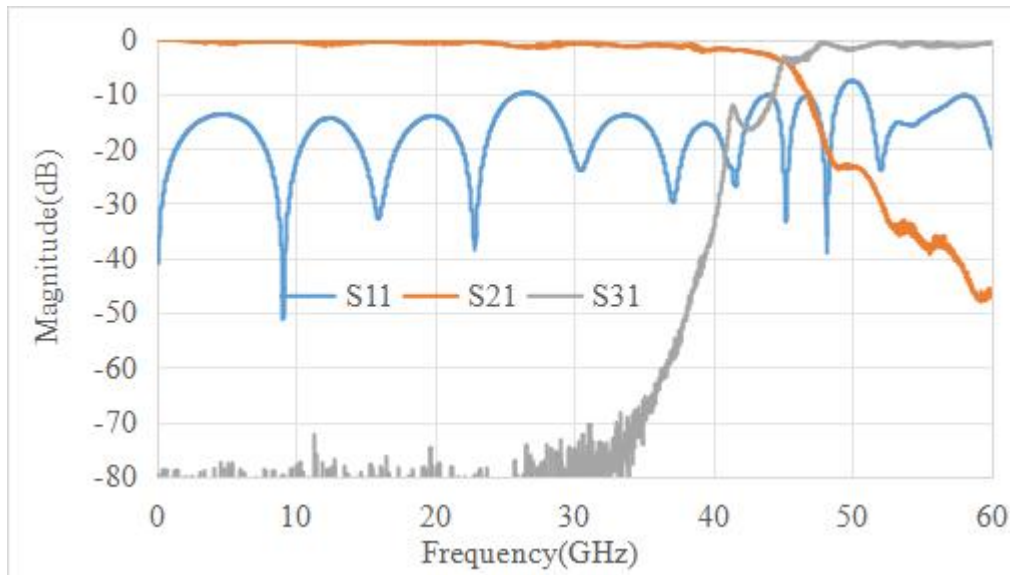

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.