Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

V–Band Frequency Extender

50-75GHz/WR-15

Model: TLDSE-050075-1430-15

TLDSE-050075-1430-15 dual frequency extenders are a dedicated Test & Measurement solution for extending the range of your signal source to 50-75 GHz.

Features:

- Frequency range: 50-75 GHz
- Output Power: 14dBm Typ
- Low power consumption

Applications:

- Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	50		75	GHz
Ch1/Ch2 Output Power		14		dBm
Dynamic Range (Mechanical Attenuator)	0		30	dB
Input Frequency	12.5		18.75	GHz
Input Power	3	5	7	dBm
Harmonics Suppression	20			dBc
Multiplication Factor		4		
Input VSWR		2		:1
Output VSWR		2		:1
Power Stability		±0.08		dB
Supply Voltage		220		V AC

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
Input Connector	SMA Female	
Output Connector	WR-15/UG-385/U	
Power Supply Pin	FGG 0B 4 Core	
Size	170*75*50	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+240 V AC
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V


Outline Drawing:

Unit:mm; Tolerance:±0.1mm

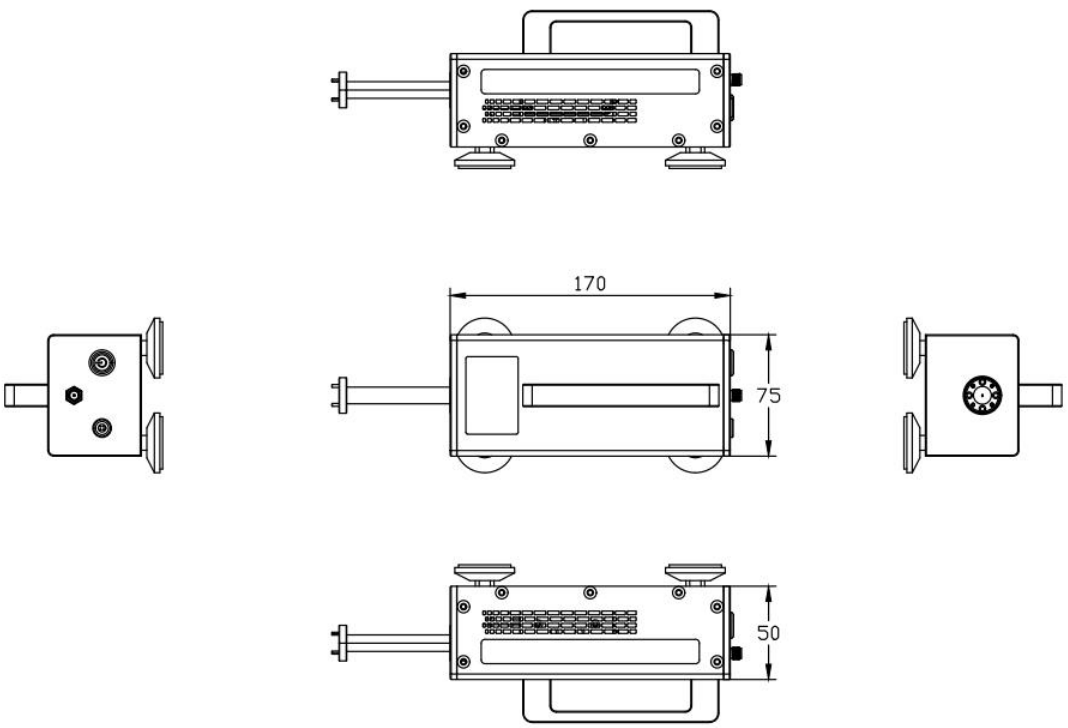

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Block Diagrams:

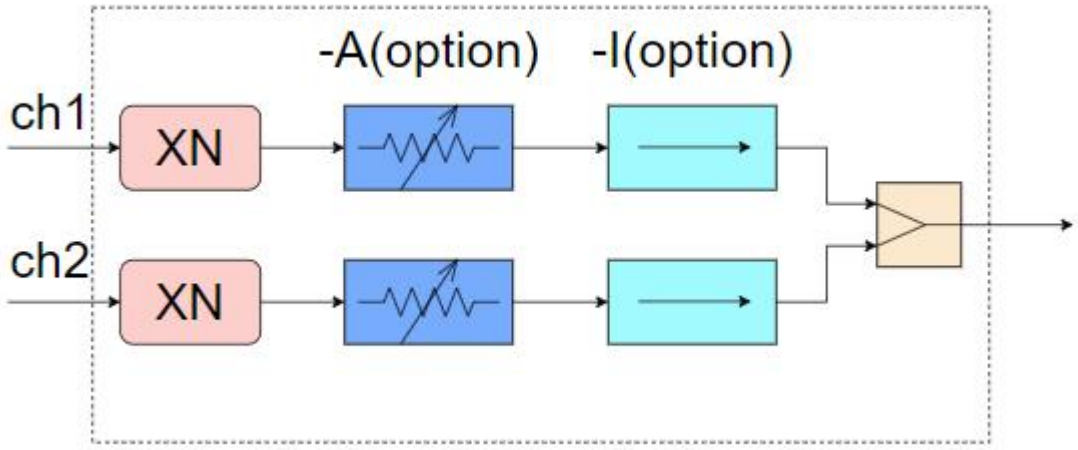

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	℃
Non-operating Temperature	-45		+85	℃
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TLDSE-050075-1430-15	V-Band Frequency Extender, X4,50-75GHz, Output Power: 14dBm Typ	Rev.1.0

Components Included:

Part Number	Description	Quantity
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS