

Model:TLPA0.1G26G-15-23
Power Amplifier
0.1G-26GHz, Gain:15dB,P1dB:23dBm
Feature:

- Ultra Wide Band: 0.1G-26GHz
- Gain: 15 dB
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	0.1GHz-26GHz			
增益 Gain		15		dB
增益平坦度 Gain Flatness		±1.5		dB
噪声系数 Noise Figure		5.0		dB
线性输出功率P1dB	23			dBm
输入驻波 Input VSWR		2.0		:1
输出驻波 Output VSWR		2.0		:1
直流电压 DC Voltage	10	+12	15	V DC
直流电流 DC Supply Current		200		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical :

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female	
直流偏置 Bias	Solder Pin	
重量 Weight	/	g

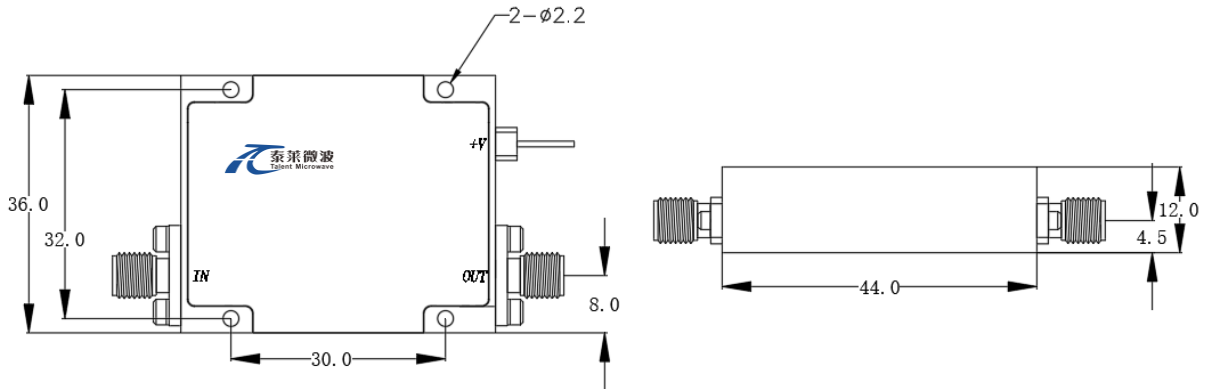

 Available 220V System
 Benchtop Amplifier

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF INPUT POWER	+15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm



***Heat Sink Required During Operation



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLPA100M26G-15-23	Power Amplifier 100M-26GHz, Gain:15dB, P1dB:23dBm, 12V DC, Without Heatsink	Rev.1.0
TLPA100M26G-15-23 -HS	Power Amplifier 100M-26GHz, Gain:15dB, P1dB:23dBm, 12V DC, With Heatsink	Rev.1.0