

**Model:TLPA26.5G40G-47-40**
**Power Amplifier**
**26.5-40GHz,Gain:47dB,P1dB:37dBm**
**Feature :**

- Ultra Wide Band: 26.5-40GHz
- Gain: 47dB Min
- Psat Output Power: 40 dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

**电气特性 Electrical:**

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	26.5-40			GHz
小信号增益 small signal Gain	47			dB
增益平坦度 Gain Flatness		±2.0		dB
线性输出功率Output P1dB		37		dBm
饱和输出功率Output Psat	40			dBm
输入驻波 Input VSWR		2.0		:1
最大输入功率Input Max Power			5	dBm
直流电压 DC Voltage		24		V DC
直流电流 DC Supply Current		5		A
阻抗 Impedance		50		Ohms

**机械特性 Mechanical :**


参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	2.92mm Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	/	mm
重量 Weight	1000	g


**绝对最大值 Absolute Maximum Ratings:**

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	
输入功率 RF INPUT POWER	5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

**外形尺寸 Outline Drawing:**

Unit: mm(inches)

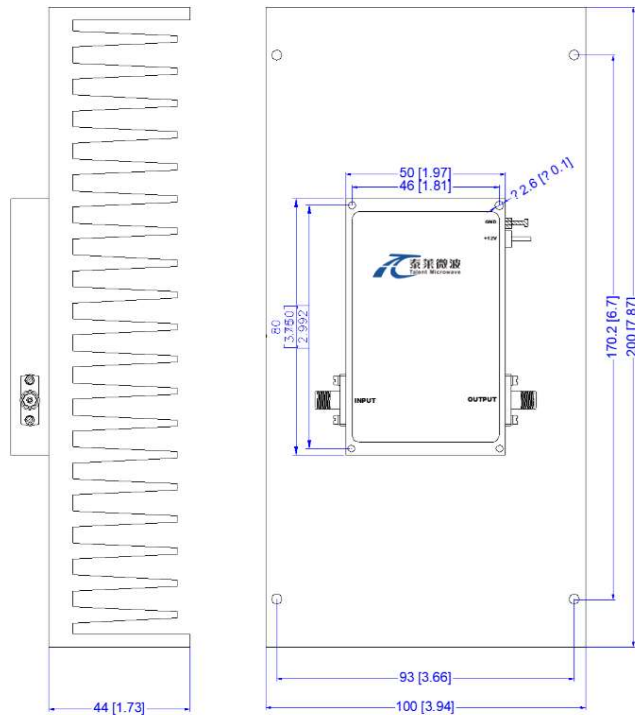

**\*\*\*Heat Sink Required During Operation**



OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

**温度环境 Environmental Conditions:**

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	20g,11ms,saw-tooth			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

**订货信息 Ordering Information:**

标准型号 Part Number	描述 Description	版本号Revision
TLPA26.5G40G-47-40	Power amplifier 26.5-40GHz,Gain:47dB,P1dB:37dBm,28V DC, Without Heatsink	Rev.1.1
TLPA26.5G40G-47-40-HS	Power amplifier 26.5-40GHz,Gain:47dB,P1dB:37dBm,28V DC, With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

Gain&Return Loss

